


CN-1 PinOut		CN-2 PinOut	
1	NC	1	NC
2	NC	2	NC
3	NC	3	NC
4	NC	4	NC
5	NC	5	NC
6	NC	6	NC
7	NC	7	NC
8	NC	8	NC
9	NC	9	NC
10	NC	10	NC
11	NC	11	NC
12	NC	12	NC
13	NC	13	NC
14	NC	14	NC
15	NC	15	Shield
16	NC	16	X00
17	NC	17	X01
18	Shield	18	X02
19	Y00	19	X03
20	Y01	20	X04
21	Y02	21	X05
22	Y03	22	X06
23	Y04	23	X07
24	Y05	24	X08
25	Y06	25	X09
26	Y07	26	X10
27	Y08	27	X11
28	Y09	28	X12
29	Y10	29	X13
30	Y11	30	X14
31	Y12	31	X15
32	Y13	32	X16
33	Y14	33	X17
34	Y15	34	X18
35	Y16	35	X19
36	Y17	36	X20
37	Y18	37	X21
38	Y19	38	X22
39	Y20	39	X23
40	Y21	40	X24
41	Y22	41	X25
42	Shield	42	X26
		43	X27
		44	X28
		45	X29
		46	X30
		47	X31
		48	X32
		49	X33
		50	X34
		51	X35
		52	X36
		53	Shield
		54	NC

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
	-	mm
O TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1	TOP ITO GLASS	t=1.1mm
2	BOTTOM ITO GLASS	t=1.1mm
3	FPC	POLYIMIDE 12.5μ m Electrolytic copper foil GILDING
4	REINFORCEMENT FILM	POLYIMIDE 25μ m
5	STIFFENER	POLYIMIDE 225μ m
6	ADHESIVE SHEET	150μ m
7	PROTECTION TAPE	POLYESTER 25μ m

PART No.		DATE	
DFS-101WA060A-E		Jan/28/2022	
TYPE		DMC Co., Ltd.	
Projected Capacitive			
DIMENSIONAL DRAWING			

TOLERANCE=±0.3mm  
EXCEPT WHERE INDICATED  
UNIT=mm

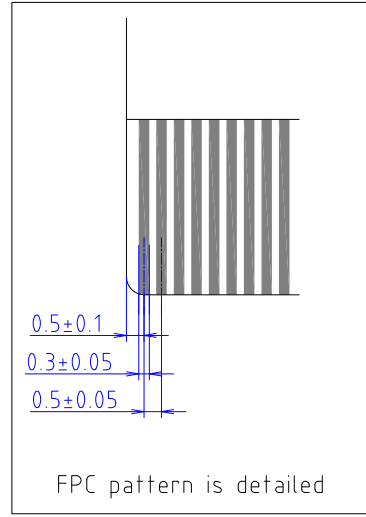

Reference point