



CN-1 PinOut		CN-2 PinOut	
1	NC	1	NC
2	NC	2	NC
3	NC	3	NC
4	NC	4	NC
5	Shield	5	Shield
6	Y00	6	X00
7	Y01	7	X01
8	Y02	8	X02
9	Y03	9	X03
10	Y04	10	X04
11	Y05	11	X05
12	Y06	12	X06
13	Y07	13	X07
14	Y08	14	X08
15	Y09	15	X09
16	Y10	16	X10
17	Y11	17	X11
18	Y12	18	X12
19	Y13	19	X13
20	Y14	20	X14
21	Y15	21	X15
22	Y16	22	X16
23	Y17	23	X17
24	Y18	24	X18
25	Y19	25	X19
26	Y20	26	X20
27	Y21	27	X21
28	Y22	28	X22
29	Y23	29	X23
30	Y24	30	X24
31	Y25	31	X25
32	Y26	32	X26
33	Y27	33	X27
34	Y28	34	X28
35	Y29	35	X29
36	Y30	36	X30
37	Y31	37	X31
38	Y32	38	X32
39	Y33	39	X33
40	Y34	40	X34
41	Y35	41	X35
42	Shield	42	X36
		43	X37
		44	X38
		45	X39
		46	X40
		47	X41
		48	X42
		49	X43
		50	X44
		51	X45
		52	X46
		53	Shield
		54	NC

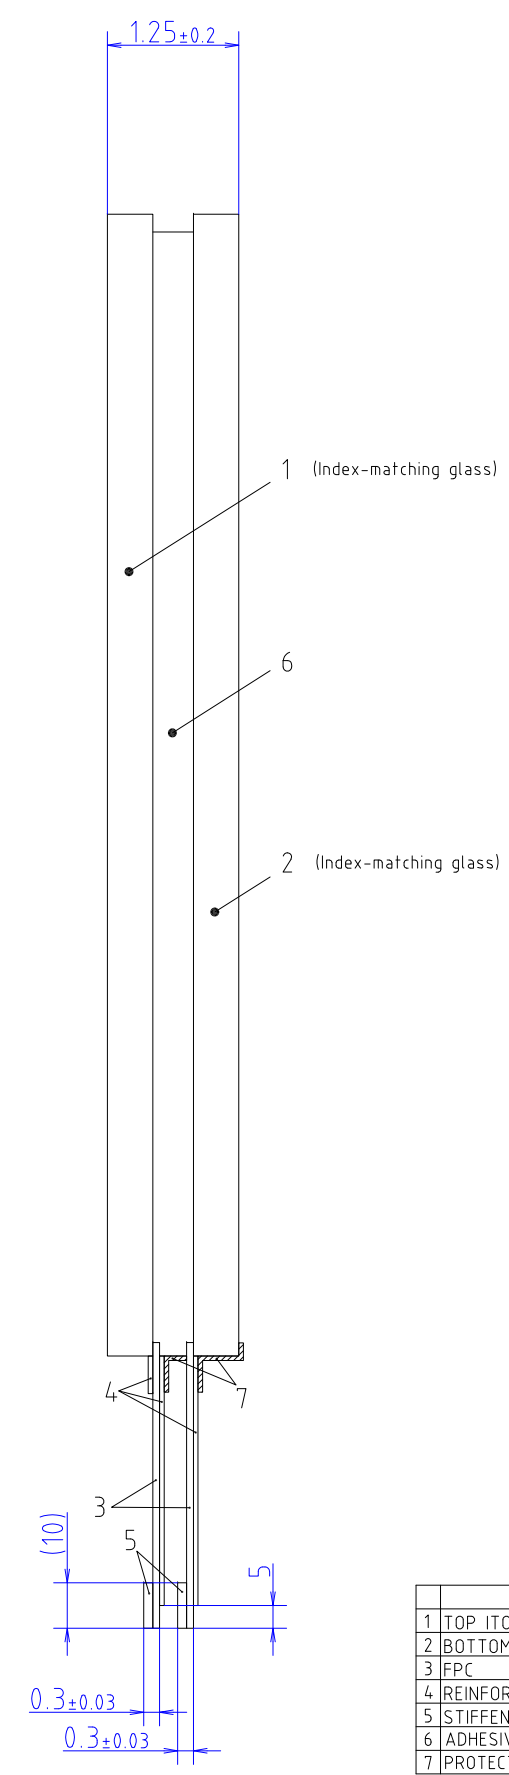

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
	-	mm
○ TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1	TOP ITO GLASS	t=0.55mm
2	BOTTOM ITO GLASS	t=0.55mm
3	FPC	POLYIMIDE 12.5μm Electrolytic copper foil GILDING
4	REINFORCEMENT FILM	POLYIMIDE 25μm
5	STIFFENER	POLYIMIDE 225μm
6	ADHESIVE SHEET	150μm
7	PROTECTION TAPE	POLYESTER 25μm

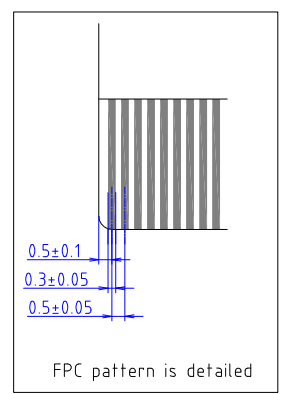

TOLERANCE=±0.3mm
 EXCEPT WHERE INDICATED
 UNIT=mm
 Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE
DFS-150A060A-E	Jan/17/2022
TYPE	DMC Co., Ltd.
Projected Capacitive DIMENSIONAL DRAWING	

