



CN1 PinOut		CN2 PinOut	
1	NC	1	Shield
2	NC	2	X00
3	NC	3	X01
4	NC	4	X02
5	NC	5	X03
6	NC	6	X04
7	NC	7	X05
8	NC	8	X06
9	NC	9	X07
10	NC	10	X08
11	Shield	11	X09
12	Y00	12	X10
13	Y01	13	X11
14	Y02	14	X12
15	Y03	15	X13
16	Y04	16	X14
17	Y05	17	X15
18	Y06	18	X16
19	Y07	19	X17
20	Y08	20	X18
21	Y09	21	X19
22	Y10	22	X20
23	Y11	23	X21
24	Y12	24	X22
25	Y13	25	X23
26	Y14	26	X24
27	Y15	27	X25
28	Y16	28	X26
29	Y17	29	X27
30	Y18	30	X28
31	Y19	31	X29
32	Y20	32	X30
33	Y21	33	X31
34	Y22	34	X32
35	Y23	35	X33
36	Y24	36	X34
37	Y25	37	X35
38	Y26	38	X36
39	Y27	39	X37
40	Y28	40	X38
41	Y29	41	X39
42	Y30	42	X40
43	Y31	43	X41
44	Y32	44	X42
45	Y33	45	X43
46	Y34	46	X44
47	Y35	47	X45
48	Y36	48	X46
49	Y37	49	X47
50	Y38	50	X48
51	Y39	51	X49
52	Y40	52	X50
53	Y41	53	X51
54	Y42	54	X52
55	Y43	55	X53
56	Shield	56	X54
		57	X55
		58	X56
		59	X57
		60	X58
		61	X59
		62	X60
		63	X61
		64	X62
		65	X63
		66	X64
		67	X65
		68	X66
		69	X67
		70	X68
		71	X69
		72	X70
		73	X71
		74	X72
		75	X73
		76	X74
		77	X75
		78	X76
		79	Shield
		80	NC

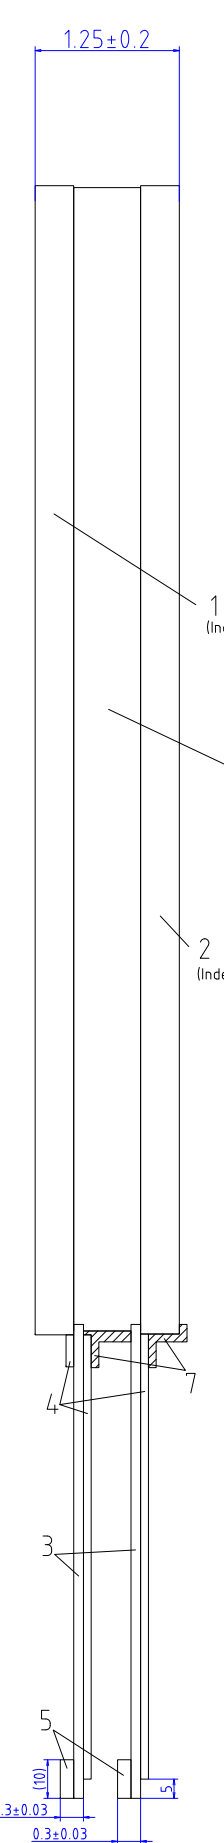


REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
	-	mm
O TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=0.55mm	
2 BOTTOM ITO GLASS	t=0.55mm	
3 FPC	POLYIMIDE 12.5μm	Electrolytic copper foil (UL-99C)
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	150μm	
7 PROTECTION TAPE	POLYESTER 25μm	

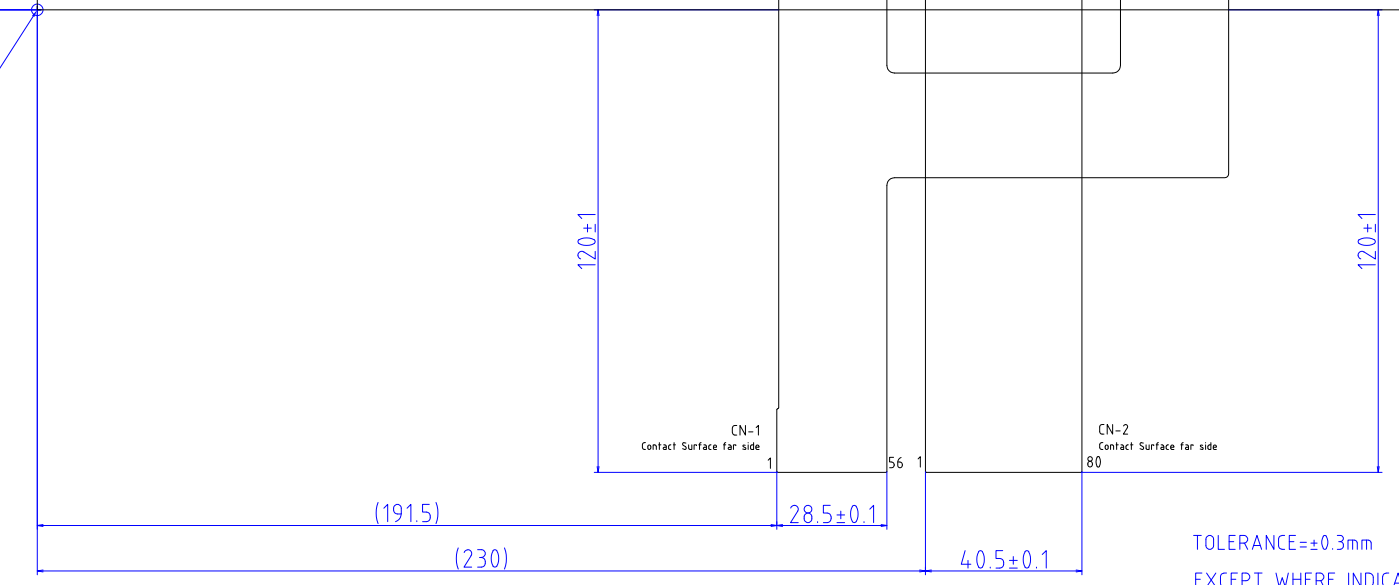

TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

Edges and corners of ITO glass may be chamfered without affecting product specification.



PART No.	DATE
DFS-215WA120A-E	Jan/25/2022
TYPE	DMC Co., Ltd.
Projected Capacitive DIMENSIONAL DRAWING	

