

Contents in this document may change without prior notice.
Please obtain the delivery specification for the latest design.



EM Series
4.3" Wide
5VDC
Embedded Linux
Open Frame Panel Computer

EM8/EMG8

Model: EM8-W104A7-0005-207 / EMG8-W104A7-0005-207

Product Specification

DMC Co., Ltd.
<https://www.dush.co.jp/english/>

Table of Contents

1.	Summary.....	3
2.	Product Model	3
3.	Packaged Contents	3
4.	Specification	4
4-1	Functional specification	4
4-2	Display Specification	5
4-3	Touch Screen Specifications	5
4-4	General Specification	6
4-5	Environmental Specification	6
4-6	Installation Specification	6
4-7	Names of parts.....	7
4-8	External Interface	8
4-8-1	microSD card slot	8
4-8-2	Serial Interface (SIO1/SIO2)	8
4-8-3	Ethernet.....	9
4-8-4	USB Host Interface	9
4-8-5	USB Device Interface	9
4-8-6	DIO Interface 1	10
4-8-7	DIO Interface 2	12
4-8-8	Power Connector.....	13
4-8-9	Battery Interface	13
4-8-10	Shipping setting switch	14
4-9	Linux OS Specification	14
4-9-1	Application software development environment.....	14
4-9-2	Embedded application	15
4-9-3	IS-APP	15
5.	Installation	16
5-1	Installing condition.....	16
5-2	Mounting	16
5-2-1	Panel mounting.....	16
6.	Product label	17
7.	Compatible Standards	17
7-1	RoHS Directives	17
8.	List of Option	18
9.	Warranty.....	19
9-1	Warranty Period	19
9-2	Warranty Exceptions	19
10.	Production Discontinuance	19
11.	Others	20

Appendix : Outline drawing SM3-001992-14, SM3-001993-14

1. Summary

This specification describes the 4.3" panel computer.

Touch Screen line up is analog resistive and projected capacitive.

The panel computer will be referred to as EM8 hereinafter

2. Product Model

Part number	Specification			
	LCD size	Touch Screen	Power supply	HMI application
EM8-W104A7-0005-207	4.3"	Resistive	5VDC	IS-APP *1
EMG8-W104A7-0005-207		Projected Capacitive		IS-APP *1

*1 Please purchase development kit (SWDK-102), when using HMI application "IS-APP"

For details, please refer to the IS-APP startup guide

3. Packaged Contents

Package	Specification	Packing box dimensions
• EM8	10 pcs/box *1	457(W) × 295(D) × 151(H) mm

*1 : Maximum unit package : 10 units per box

4. Specification

4-1 Functional specification

Item			Specifications
			EM8-W104A7-0005-207 / EMG8-W104A7-0005-207
CPU			NXP i.MX6UL 528MHz (ARM Cortex-A7 single core)
RAM			DDR3-SDRAM 256MB
ROM			NAND Flash 512MB
Battery Backup SRAM			128KB
Interface	Serial	SIO1	RS232C : 1CH (5-pin nylon connector)
		SIO2	RS422/485: 1CH (6-pin nylon connector)
	Ethernet		10BASE-T/100BASE-TX : 1CH
	microSD Card * ¹		microSD/SDHC card slot : 1CH
	USB host * ²		USB2.0 : 1CH (TYPE-A connector) USB devices that can be used : keyboard, mouse(HID Class), USB memory (Mass Storage Class)
	USB device		USB2.0 : 1CH (miniTYPE-B connector)
	DIO 1		Input 6 points (Non-insulated LVCMOS level input) Output 4 points (Non-insulated Open drain output)
	DIO 2		VCC output 1 points Output 8 points (Non-insulated Open drain output [limited resistance 1KΩ included])
	Buzzer		On board
	RTC * ³		RTC with a battery backup Error at the time of backup :±65 seconds/month (Conditions: ambient temperature 25°C)

*1 Does not guarantee accurate operation for all SD memory cards available in the market.

*2 Does not guarantee accurate function for all USB devices available in the market.

*3 Above chart shows RTC with battery back-up embedded on the EM8.

EM8 normally uses timer inside of the CPU for time display. If time according to specification is needed, please refer to RTC built-in the EM8.

When using in system where time error becomes a problem, please set to correct time on a regular basis.

4-2 Display Specification

Item		Specifications
		EM8-W104A7-0005-207 / EMG8-W104A7-0005-207
Display	Type	4.3" TFT LCD
	Resolution	480(W) × 272(H)
	Color	65,536 colors
	Backlight	LED (not replaceable)
	Brightness	400cd/m ²
	Backlight brightness adjustment	Adjustable in 8 levels
	Backlight life *1	70,000 hours average

*1 Time until brightness declines by 50% from the initial value at maximum brightness in ambient temperature of 25°C.

4-3 Touch Screen Specifications

Item	Specifications	
	EM8-W104A7-0005-207	EMG8-W104A7-0005-207
Type	Analog resistive	Projected Capacitive
Input Type	Finger	Finger
Multi-touch	1 point	2 points *1
Operating life	Continuous typing (finger input) : 10 million times	Continuous typing (finger input) : 50 million times

*1 Application for two point simultaneous input must be created by customer.

Note: Touch screen operations will become unstable depending on the installation environment due to its characteristics. In order to use it correctly, perform calibration for sensitivity sensor of touch screen when building into a device. Also, if at any time the touch screen operations become unstable due to changes in the setting environment or installation, perform sensitivity sensor calibration.

If there is moisture on the touch screen surface, it may not operate properly.

When moisture is detected on the surface, please wipe it dry before use.

4-4 General Specification

Item		Specification
		EM8-W104A7-0005-207 / EMG8-W104A7-0005-207
Power	Rated voltage	5VDC
	Voltage tolerance	5VDC±5%
	Power consumption*1	3W or under (Typ. 1.5W)
	FG Connection	FG (Frame GND) and SG (Signal GND) are connected internally

*1 Power consumption of the unit only. Please consider the power consumption of the USB device when using the USB.

Note: When gentle power source is used for rising and falling of power, it may not operate properly.

Also, when rebooting EM8, leave it off for a while after turning off; do not turn the power back on immediately. It may not start up accurately.

4-5 Environmental Specification


Item	Specification
Ambient operating temperature (Inside cabinet and display side)	0°C to 55°C
Ambient storage temperature	-20°C to +80°C
Ambient operating humidity	10%RH to 90%RH (Non-condensing. Wet-bulb temperature is 39 °C or less)
Ambient storage humidity	10%RH to 90%RH (Non-condensing. Wet-bulb temperature is 39 °C or less)
Dust	0.1mg/m ³ or under (Conductive dust is prohibited)
Corrosive Gas	Corrosive gas Prohibited
Environment	Pollution Degree 2, Indoor use
Pressure resistance	800hPa to 1114hPa (Altitude up to 2000m)
Vibration resistance	IEC61131-2(JIS B 3502) compliant 5Hz to 9Hz Single amplitude 3.5mm 9Hz to 150Hz Fixed acceleration 9.8m/s ² X,Y,Z directions for 10times(100min.)

4-6 Installation Specification

Item	Specification	
	EM8-W104A7-0005-207	EMG8-W104A7-0005-207
Grounding	Functional grounding : D type ground	
Structure	Open frame	
Cooling	Natural cooling	
Weight	Approx, 265g	Approx, 275g
External Dimensions	139(W) × 73(H) × 31.7(D) mm	139(W) × 73(H) × 32.1(D) mm


4-7 Names of parts

■ Back : EM8-W104A7-0005-207 / EMG8-W104A7-0005-207

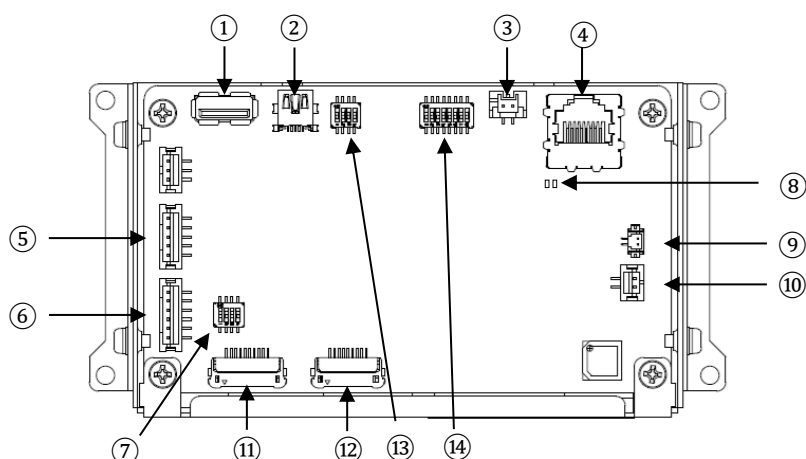


- | | |
|-----------------------|---------------------------------|
| ① USB Host | ⑧ Status LEDs for Ethernet Port |
| ② USB Device | ⑨ Battery Interface 1 |
| ③ Power Input | ⑩ Battery Interface 2 |
| ④ Ethernet | ⑪ DIO 1 |
| ⑤ Serial Port (SIO1) | ⑫ DIO 2 |
| ⑥ Serial Port (SIO2) | ⑬ Shipping setting switch1 |
| ⑦ SIO2 setting switch | ⑭ Shipping setting switch2 |

■ Bottom : EM8-W104A7-0005-207 / EMG8-W104A7-0005-207

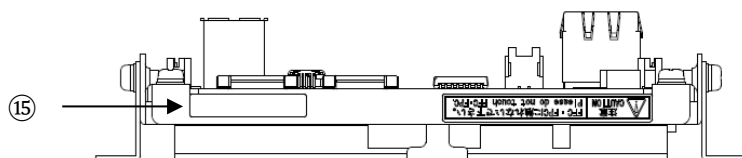

- ⑮ Product label

■ Top : EM8-W104A7-0005-207 / EMG8-W104A7-0005-207

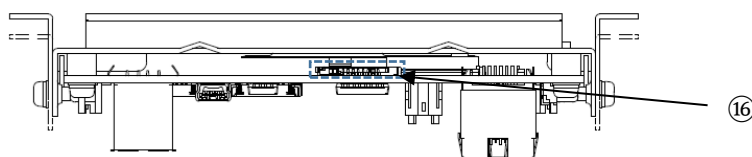

- ⑯ microSD Card slot

4-8 External Interface

4-8-1 microSD card slot

Connector : microSD card slot (Push-in/Push-out method)

Corresponding media : microSD/SDHC memory card


Maximum capacity : 32GB

4-8-2 Serial Interface (SIO1/SIO2)

(1)Serial port (SIO1) : RS232C

Connector : Nylon connector


Model number : B5B-PH-SM4-TB (JST)

PIN No	Signal	Schematic
1	RXD	
2	TXD	
3	GND	
4	RTS	
5	CTS	

(2)Serial port (SIO2) : RS422/485

Connector : Nylon connector

Model number : B6B-PH-SM4-TB (JST)

PIN No	Signal		Schematic
	RS422	RS485	
1	TX+	DATA+	
2	TX-	DATA-	
3	GND	GND	
4	RX+	(DATA+)* ¹	
5	RX-	(DATA-)* ²	
6	GND	GND	

*1 It is connected to pin 1 inside the product.

*2 It is connected to pin 2 inside the product.

RS422/485 setting enable to change by SIO2 setting switch


Default setting at shipment is RS485 Terminating resistance enabled

PIN No	RS422	RS485	Detail
1	ON/OFF		ON: Terminating enable / OFF: disable
2	OFF	ON	RS422/485 setting
3	OFF	ON	
4	OFF	ON	

4-8-3 Ethernet

Ethernet : 10BASE-T/100BASE-TX

Connector : RJ-45

PIN no	Signal	Schematic
1	TX+	
2	TX-	
3	RX+	
4	NC *1	
5	NC *1	
6	RX-	
7	NC *1	
8	NC *1	

*1 NC is not connected

Status LED

GREEN : LINK/ACT

YELLOW : SPEED

*Status LED is located on board


Compatible cable: Above Category 5

4-8-4 USB Host Interface

Interface : USB2.0

Connector : Type-A connector


Maximum supply current : 0.5A

PIN No	Signal	Schematic
1	USB_VCC	
2	D-	
3	D+	
4	GND	

4-8-5 USB Device Interface

Interface : USB2.0

Connector : Type-B Mini connector




PIN No	Signal	Schematic
1	USB_VCC	
2	D-	
3	D+	
4	NC*1	
5	GND	

*1 NC is not connected

4-8-6 DIO Interface 1

Connector : FFC connector (1mm pitch bottom contact)


Model number : 00-6200-107-032-800+ (Kyocera Elco)

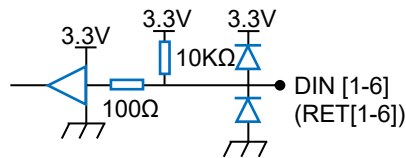PIN	Signal	Input / output Specifications	Interface Circuit	Schematic
1	DOUT 12 (SCAN 4)	Non-insulated open drain output (negative logic) Voltage:5V[5.5V(MAX)]* ¹ Current:12mA(MAX)* ^{1,2}		
2	DOUT 11 (SCAN 3)			
3	DOUT 10 (SCAN 2)			
4	DOUT 9 (SCAN 1)			
5	DIN 6 (RET 6)	Non-insulated 3.3V* ¹ (LVCMOS level) input (positive logic)		
6	DIN 5 (RET 5)			
7	DIN 4 (RET 4)			
8	DIN 3 (RET 3)			
9	DIN 2 (RET 2)			
10	DIN 1 (RET 1)			

*1 Note : If it is used beyond the upper limit of the specified value, it may lead to a failure.

*2 Note : The current value per port. Use with a total of 40mA or less.

Applicable cable drawing

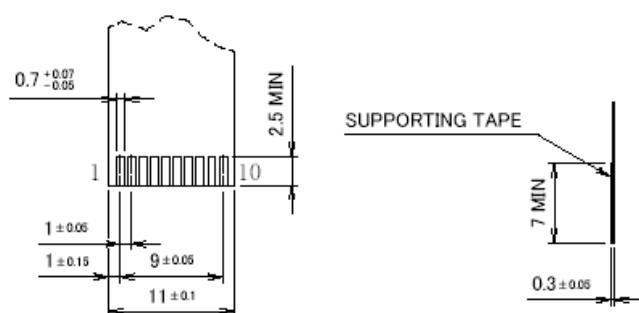

Switch of the matrix circuit, as shown in the diagram below, can be connected.



* Do not press multiple switches simultaneously. It may result in incorrect input.



4-8-7 DIO Interface 2

Connector : FFC connector (1mm pitch bottom contact)


Model number : 00-6200-097-032-800+ (Kyocera Elco)

PIN	Signal	Input / Output Specification	Interface circuit	Schematic
1	VCC	5V output 200mA(MAX)* ¹	Output +5V in the board	
2	DOUT 1	Non-insulated open drain output (negative logic) Voltage:5V[5.5V(MAX)]* ¹ Current:5mA* ² *Limited resistance included 1K Ω		
3	DOUT 2			
4	DOUT 3			
5	DOUT 4			
6	DOUT 5			
7	DOUT 6			
8	DOUT 7			
9	DOUT 8			

*1 Note : If it is used beyond the upper limit of the specified value, it may lead to a failure.


*2 Note : The current value per port.

Applicable cable drawing

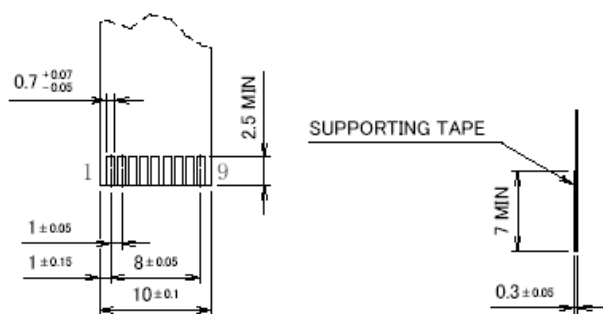

LED of the LED circuit, as shown on the diagram below, can be connected.

By generating output to the DIO number shown below, the LED can be turned ON or OFF.

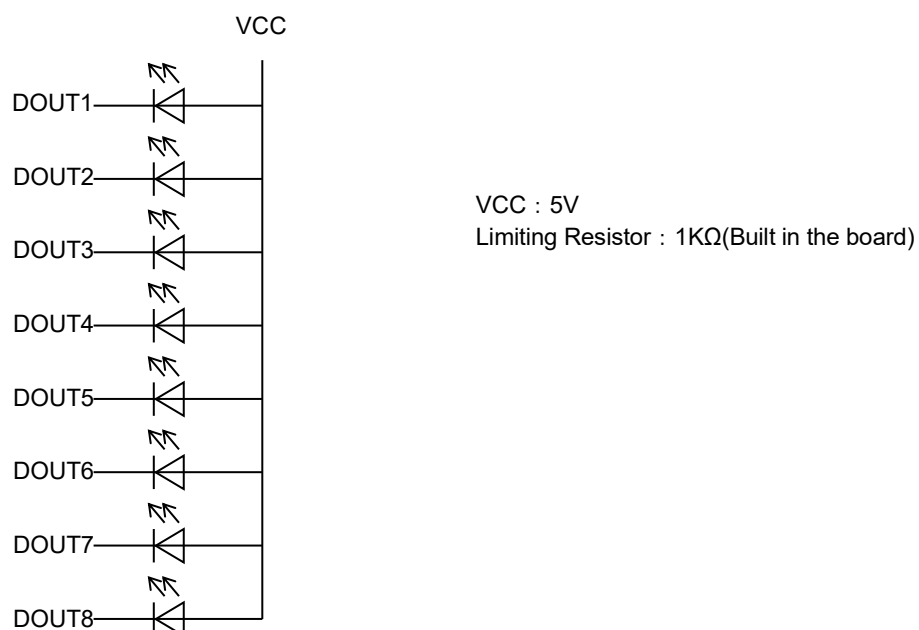


4-8-8 Power Connector

Interface : 5VDC IN

Connector : Nylon connector

Model number : BM02B-PASS-1-TFT (JST)

PIN	Signal	Schematic
1	+5VDC	
2	GND	

4-8-9 Battery Interface

Use the primary battery as the battery. Use the one with a nominal voltage of 3VDC.

Do not apply a voltage higher than 3.6VDC.

The backup current is TYP 60 μ A.


* There are two battery interface connectors.

If two connectors are connected, the one with the higher voltage will be used first.

Battery Interface 1

Connector : Nylon connector

Model number : DF13C-2P-1.25V(21) (Hirose electric)

PIN	Signal	Schematic
1	+	
2	-	


Compatible battery: Maxell CR2032WK11

A primary battery with a nominal voltage of 3VDC may be used in addition to the compatible batteries listed above.

Battery Interface 2

Connector : Nylon connector

Model number : B2B-PH-SM4-TB (JST)

PIN	Signal	Schematic
1	+	
2	-	

Compatible battery: Maxell "CR17450 A WK 41", "CR17450 A 2WK 35", "CR17335 A WK 11".

A primary battery with a nominal voltage of 3VDC may be used in addition to the compatible batteries listed above.

4-8-10 Shipping setting switch

This is a factory default switch. Don't change the switch settings.

EM8 factory settings

Shipping setting switch1

No.	1	2	3	4
Set	OFF	OFF	OFF	OFF

Shipping setting switch2

No.	1	2	3	4	5	6	7	8
Set	OFF	OFF	ON	ON	OFF	ON	ON	OFF

4-9 Linux OS

This describes the Linux OS embedded in the EM8.

For details, please refer to the EM series software development manual.

We can provide the software development environment (DVD).

Please contact us via e-mail for the DVD.

4-9-1 Application software development environment

Qt application recommended

4-9-2 Embedded application

Specification of Linux shows the following table

Item		specifications
Glibc version		2.23
Implementation software	Qt5.7.1	GUI tool kit
	PCMan File Manager	File manager
	uim	Japanese input method
	anthy	Conversion engine
	GTK+	GIMP Toolkit library
	bash	Bash shell
	busybox	Program that saves Linux base command as one file
	udhcp	DHC client
	gdbserver	Gdb debugger that can connect from host
	ntpd	Time synchronization by NTP
	Lighttpd	Web server: php and chi compatible
	x11	X Window system
	x11vnc	VNC server/client
	LXTerminal	Terminal emulator
	ALSA	Audio mixer
	emg-setting	EMG setting tool
	florence	Screen keyboard
	leafpad	Text editor
	openssh	SSH server
	libmodbus	Modbus library

* For details, please refer to "EM series software development manual".

4-9-3 IS-APP

EM8 is able to implement the function of InfoSOSA(IS-APP) HMI application.


Please purchase "Development Kit(SWDK-102) when uses IS-APP.

For details, Please refer to "IS-APP start up guide"

5. Installation

5-1 Installing condition

- When mounting the EM8 to panels, be sure to have enough room for inserting and removing microSD cards, cables, and mounting brackets.
 - Please install EM8 between EM8 and structures or parts considering the specification temperature and ensure the ventilation.
 - Be sure that the ambient operation temperature (0°C to 55°C) and the ambient humidity (10%RH to 90%RH. Wet-bulb temperature is 39°C or less) are within their designated ranges.
- “Ambient operation temperature” indicates both the display side and inside of cabinet where the EM8 will be installed.

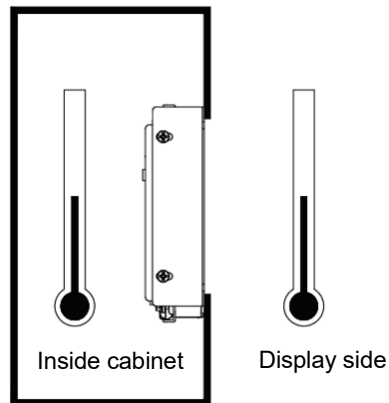


5-2 Mounting

5-2-1 Panel mounting


Below is the panel opening dimension example for when applying sheets and etc. to the surface by opening the entire touch screen surface.

Design the chassis accordingly to the actual installing method.

* Diagram from the front side of panel (panel thickness: 1.6mm or less)

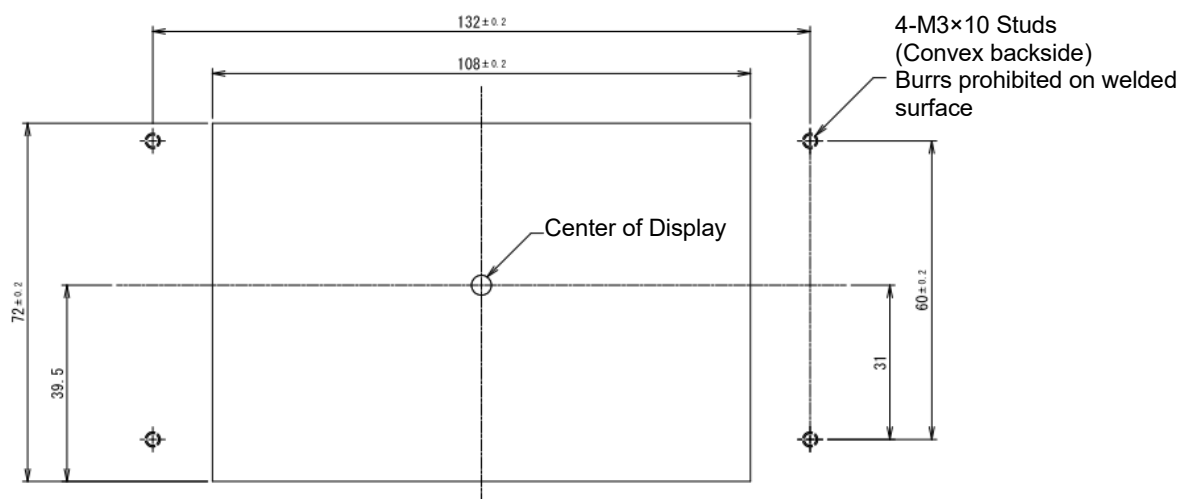

6. Product label

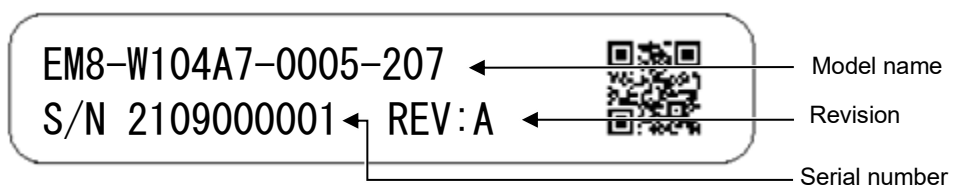

The above is an image of the Product label design

The product will be labeled with the following information

- Model name : Print the model of the product you purchased.
- Serial number : Print the 10-digit control number assigned by us.
- Revision : Print the alphabet (One letter of the A to Z) according to the latest shipping version.

7. Compatible Standards

7-1 RoHS Directives

This product is RoHS Directive of EU complaint

8. List of Option

■ Development Kit for IS-APP

Model	Description
SWDK-102	5VDC Power unit InfoSOSA Development Kit Data Download Guide *1

*1 This is needed when using InfoSOSA(IS-APP) application.

■ Serial communication cable

Model	Description
ISCBL-S02-001	RS232C Cable [Nylon connector 5P - Dsub (2000mm)]
ISCBL-S03-001	RS232C Cable [Nylon connector 5P - cut end (500mm)]
SWHC-T2-001	RS422 Cable [Nylon connector 6P - cut end (500mm)]
SWHC-T3-001	RS485 Cable [Nylon connector 6P - cut end (500mm)]

■ Power supply cable

Model	Description
ISCBL-S01-001	Power supply Cable [Nylon connector 2P - cut end (500mm)]

9. Warranty

9-1 Warranty Period

The warranty period is limited to 12 months (1 year) from the date of shipment. Warranty for any repair needed to the same repaired part of the same product is three months. Any defects that occur upon normal use under conditions specified herein will be repaired (factory repair) free of charge.

Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the defect is considered to be caused by the supplier.

The replacement is subject to be included in the next lot.

9-2 Warranty Exceptions

You will be liable for all repair fees even within the warranty period for any conditions listed below:

- (1) Any malfunctions, defects, and/or damages that occurred during transport, transfer, or mishandling by the user after delivery
- (2) Any malfunctions, defects, and/or damages caused by natural or man-made disaster.
- (3) Any malfunctions and damages caused by static electricity.
- (4) If the product is used under any condition, in any environment, or by any method other than those specified in the specifications, catalogs, manuals, notes, and/or other documents.
- (5) Any replacement of consumables.
- (6) Any malfunctions, defects, and/or damages caused by associated equipment and/or usage of inappropriate consumables and media.
- (7) If the product is repaired, remodeled, modified, or disassembled by a party other than DMC
- (8) If the product cannot be identified by a serial number.
- (9) Any malfunctions, defects, and/or damages that are to have been caused on your behalf.

This warranty covers only the product itself. Any damages, on-site repairs and replacement driven by the failure of the product will be decided upon discussion by both parties as necessary.

This product is structurally not repairable. All damaged parts are subject for replacement and freight will be charged.

10. Production Discontinuance

In the event of production discontinuance, an announcement will be made on our guidance six months prior to the last possible order reception date.

11. Others

If you have comments or questions, please feel free to contact us.

North South America area

✉ technical-global@dush.co.jp

Asia Pacific area

✉ technical-global-asia@dush.co.jp

Europe, Middle East, Africa area

✉ technical-global-eu@dush.co.jp

FAQ

 www.dush.co.jp/english/support/faq/

6th Edition June 2026

DMC Co., Ltd.

Office hours: 9:00 - 17:00 weekdays

(except Saturdays, Sundays, national holidays, and year-end and New Year holidays)


URL: <https://www.dush.co.jp/english/>

This product and document are protected by the copyright law.


Photocopying, duplicating, reproducing, and modifying of this product or document in part or by whole is prohibited.

Copyright(C) 2018 DMC Co., Ltd. All Rights Reserved


寸法許容差 TOLERANCE	
呼び寸法	
$L \leq 3$	± 0.4
$3 < L \leq 6$	± 0.48
$6 < L \leq 10$	± 0.58
$10 < L \leq 18$	± 0.7
$18 < L \leq 30$	± 0.84
$30 < L \leq 50$	± 1.0
$50 < L \leq 80$	± 1.2
$80 < L \leq 120$	± 1.4
$120 < L \leq 180$	± 1.6
$180 < L \leq 250$	± 1.85
$250 < L \leq 315$	± 2.1
$315 < L \leq 400$	± 2.3
$400 < L \leq 500$	± 2.5

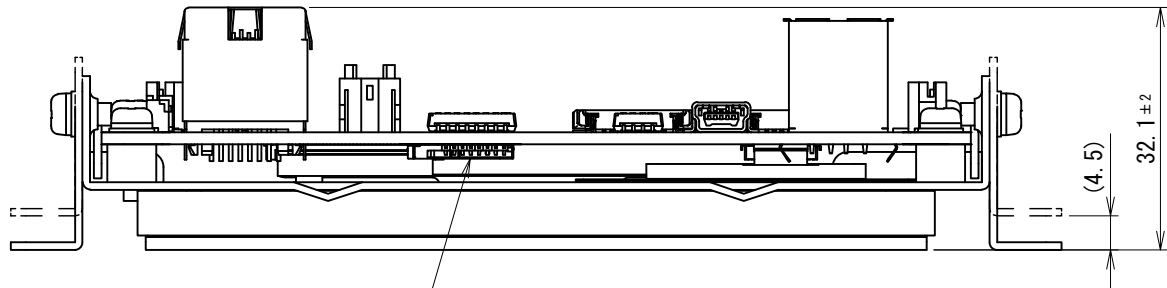

Micro SD Card Slot

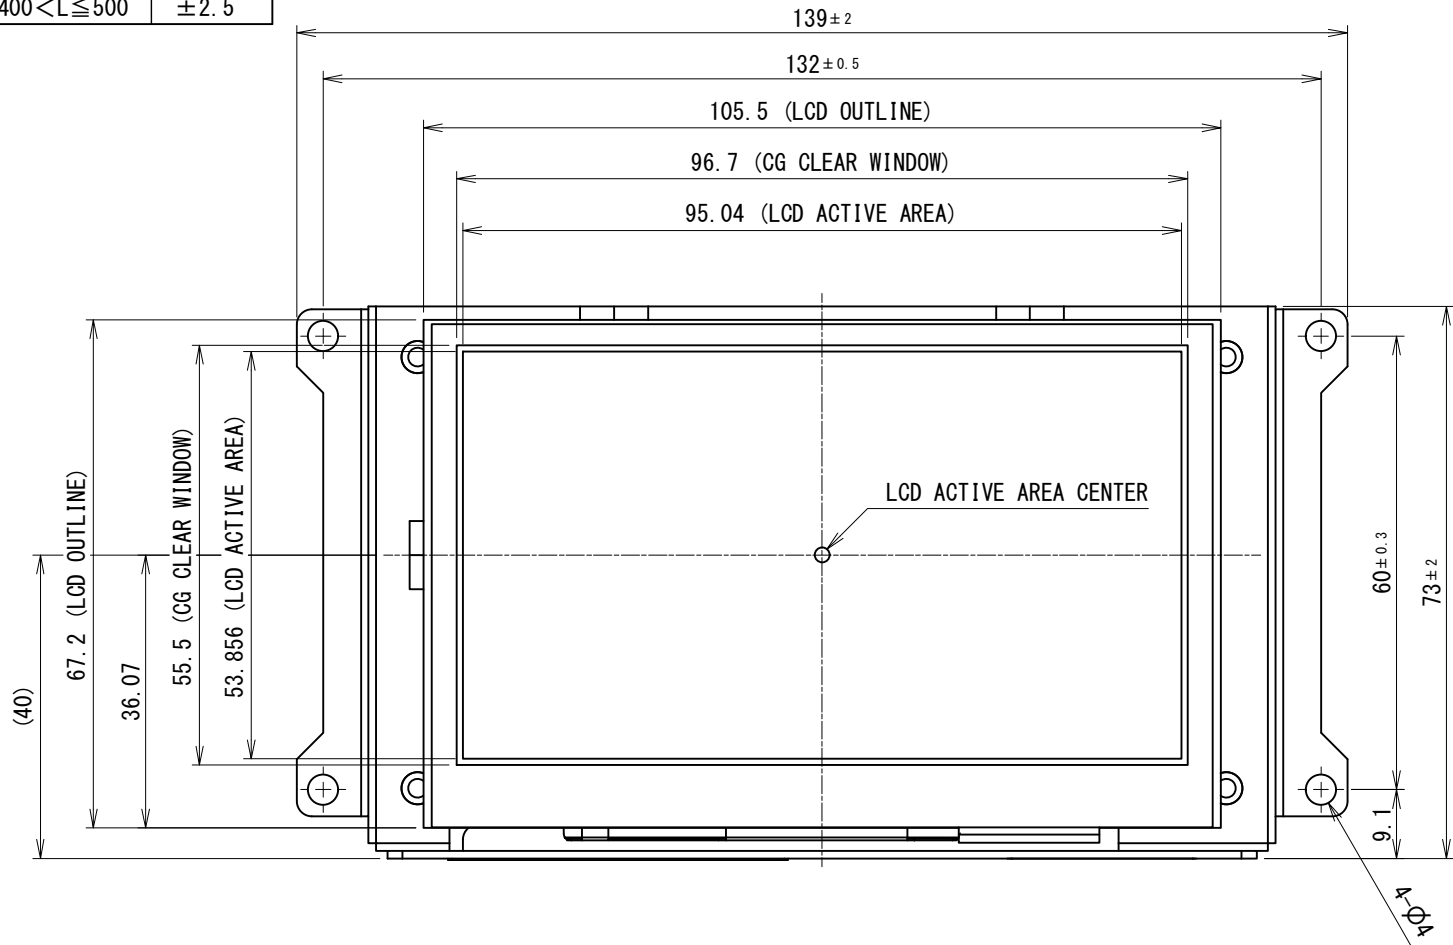

LCD ACTIVE AREA CENTER

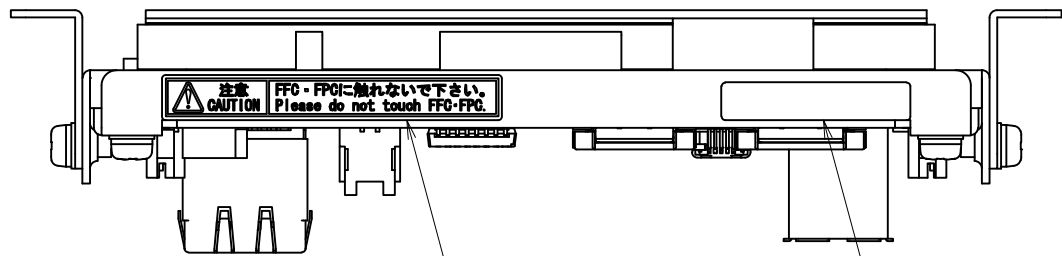

Caution Label

Product Label

NOTES


1. 指示なき寸法公差は一般寸法公差とする。

Tolerance shall be of general dimensional tolerance unless specified otherwise.

2. 社内調整用コネクタは、お客様での使用はございません。




Connector for internal adjustment: cannot be used by customer.

SYM	改訂日 DATE	改訂内容 DESCRIPTION	ページ PAGE	担当 DESIGNED
	2017.07.04	新規図面登録	—	S. Yoshimoto
△	2018.06.11	DIO Interface 追加	—	S. Yoshimoto
△	2020.03.19	Serial No. Label 削除	—	S. Takada
△	2023.11.17	表題欄社名変更、アングル形状変更	—	S. Takada
△	2026.06.08	Battery Interface 2 追加	—	S. Takada

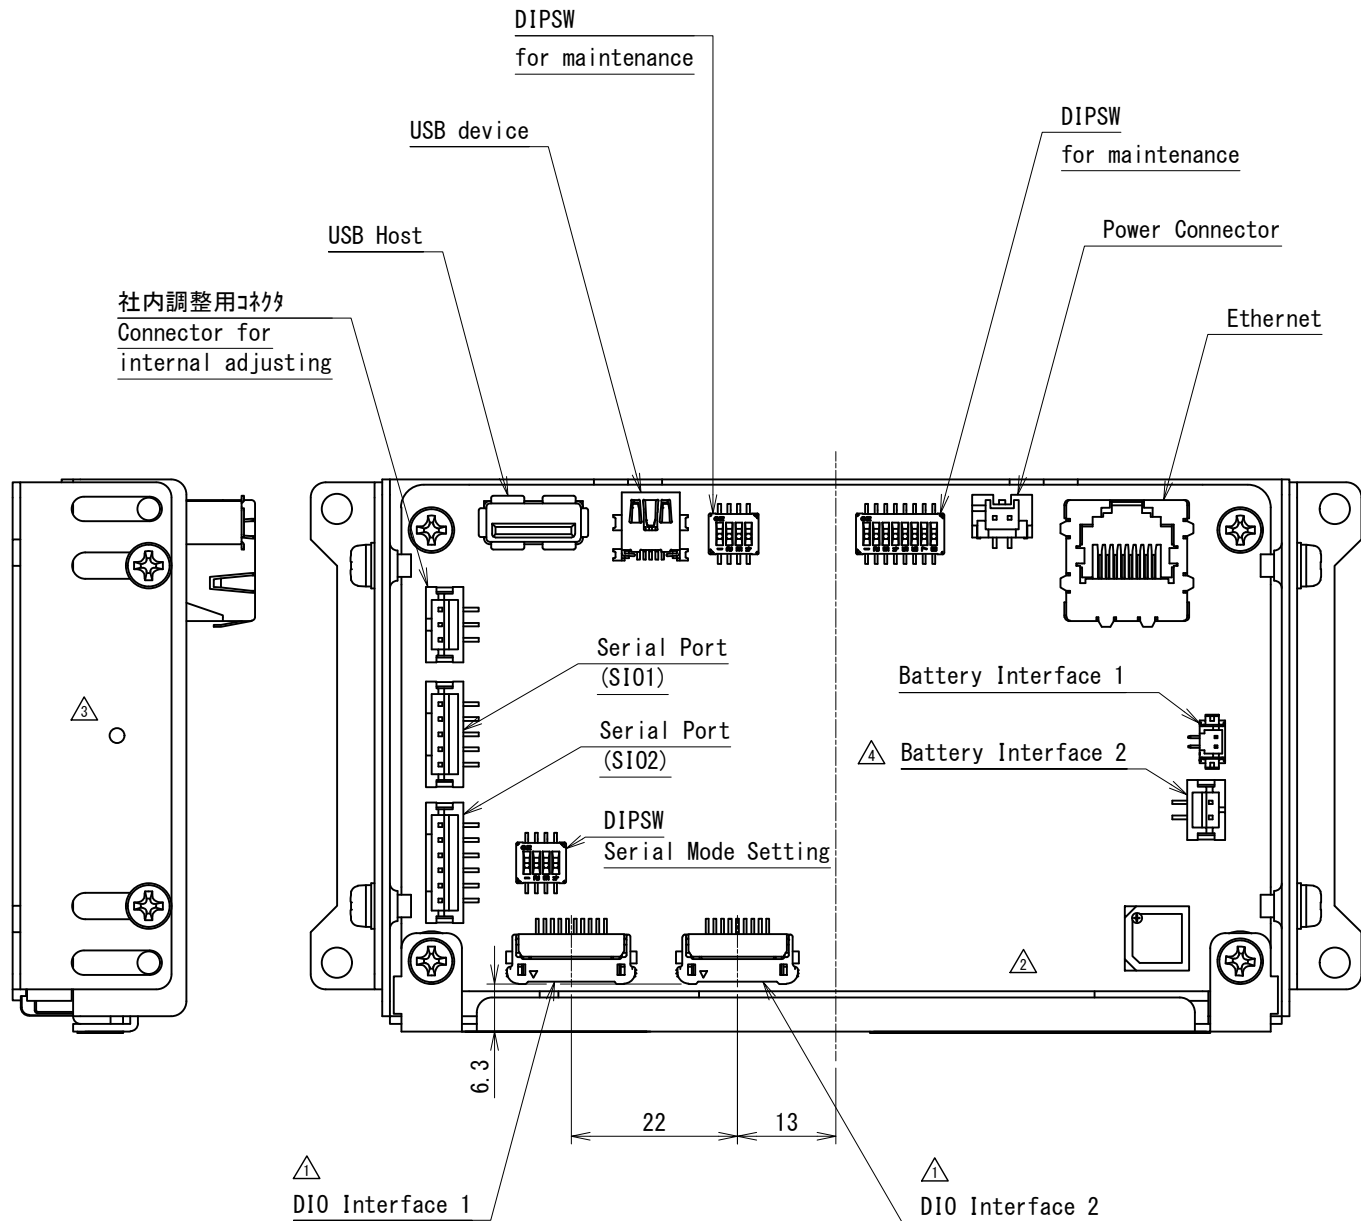


製図日 ISSUED	2026.06.08	部署 SECTION	Technical Dept.	尺度 SCALE	CAD登録名 CAD FILE NAME	16K001-4_EMG8-W104A7_OUTLINE		RoHS対応品 RoHS compliant	
承認 APPROVED	検 図 CHECKED	製 図 DRAWN	設 計 DESIGNED	1:1	製品名 MODEL	EMG8-W104A7-0005-XX7			
T. Okada	S. Yoshimoto	S. Takada	S. Takada	単 位 UNIT		図 名 TITLE	OUTLINE		ページ PAGE
				mm	図 番 DWG No.	SM3-001992-14			
DMC Co., Ltd.			A3						

寸法許容差 TOLERANCE	
呼び寸法	
$L \leq 3$	± 0.4
$3 < L \leq 6$	± 0.48
$6 < L \leq 10$	± 0.58
$10 < L \leq 18$	± 0.7
$18 < L \leq 30$	± 0.84
$30 < L \leq 50$	± 1.0
$50 < L \leq 80$	± 1.2
$80 < L \leq 120$	± 1.4
$120 < L \leq 180$	± 1.6
$180 < L \leq 250$	± 1.85
$250 < L \leq 315$	± 2.1
$315 < L \leq 400$	± 2.3
$400 < L \leq 500$	± 2.5

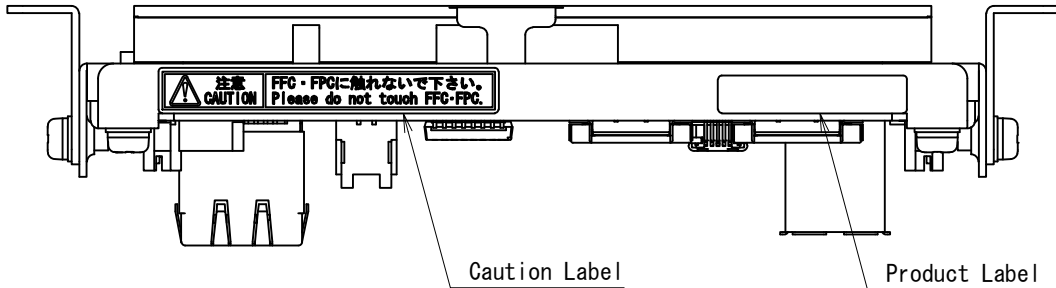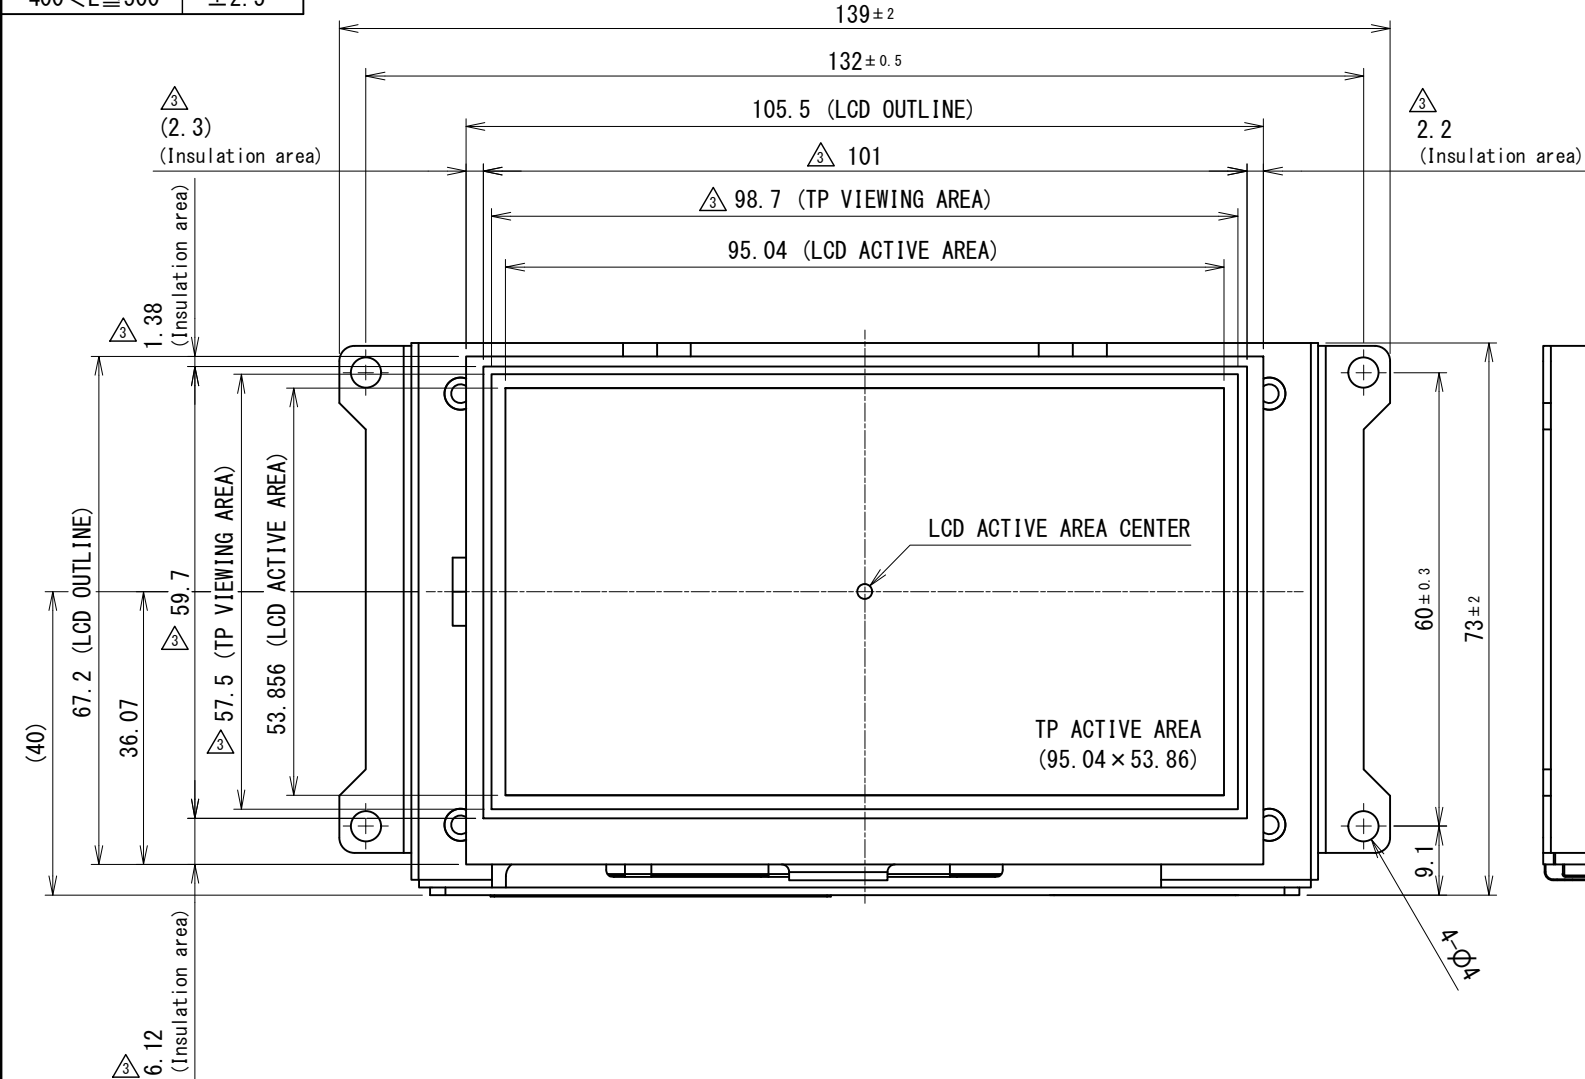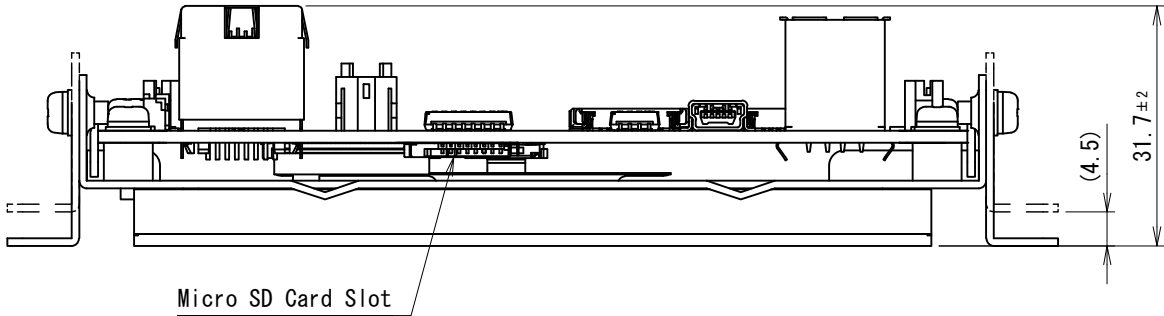

SYM	改訂日 DATE	改訂内容 DESCRIPTION	ページ PAGE	担当 DESIGNED
	2017.07.04	新規図面登録	—	S. Yoshimoto
△	2018.06.11	DIO Interface 追加	—	S. Yoshimoto
△	2020.03.19	Serial No. Label 削除	—	S. Takada
△	2023.11.17	表題欄社名変更、Insulation area追加、TP VIEWING AREA追加、アングル形状変更	—	S. Takada
△	2026.06.08	Battery Interface 2 追加	—	S. Takada

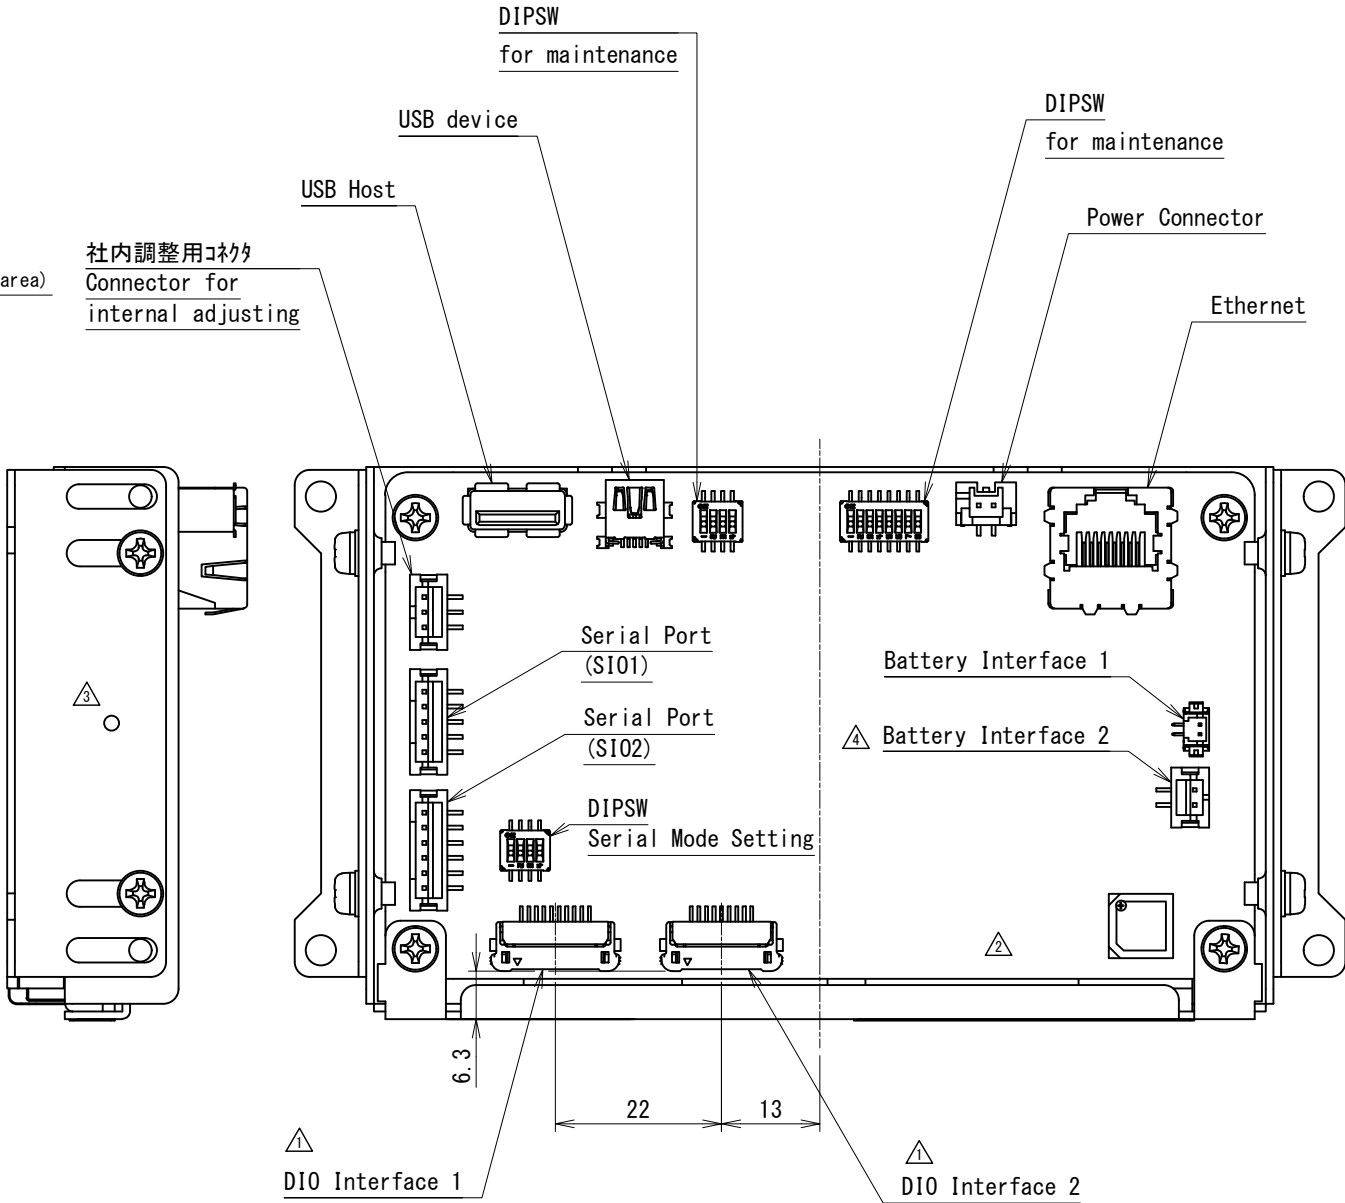

- NOTES
- 指示なき寸法公差は一般寸法公差とする。
Tolerance shall be of general dimensional tolerance unless specified otherwise.
 - 社内調整用コネクタは、お客様での使用はございません。
Connector for internal adjustment: cannot be used by customer.

製図日 ISSUED	2026.06.08	部署 SECTION	Technical Dept.	尺度 SCALE	CAD登録名 CAD FILE NAME	16K001-5_EM8-W104A7_OUTLINE	RoHS対応品 RoHS compliant
承認 APPROVED	検図 CHECKED	製図 DRAWN	設計 DESIGNED	1:1	製品名 MODEL	EM8-W104A7-0005-XX7	
T. Okada	S. Yoshimoto	S. Takada	S. Takada	単位 UNIT	図名 TITLE	OUTLINE	ページ PAGE
				mm			1 / 1
DMC Co., Ltd.			A3	図番 DWG No.	SM3-001993-14		