

Contents in this document may change without prior notice.  
Please obtain the delivery specification for the final design.



12.1" Wide (WXGA)

Projected capacitive Touchscreen Module with LCD

Basic Set

# TK-B Series

Model: TK-BPA121WX-11A3

## Product Specification

DMC Co., Ltd.

<https://www.dush.co.jp/english/>

## Table of Contents

|       |  |    |
|-------|--|----|
| 1     | Summary .....  | 2  |
| 2     | Product Model .....  | 2  |
| 3     | Packaging Specification .....  | 3  |
| 4     | Module Specification .....   | 4  |
| 4-1   | Function .....   | 4  |
| 4-2   | General Specification .....  | 5  |
| 4-3   | Environment .....  | 5  |
| 4-4   | Mechanical Specification .....   | 5  |
| 4-5   | Touchscreen Controller .....   | 5  |
| 4-6   | Touchscreen Driver .....   | 5  |
| 4-7   | HDMI Board .....   | 6  |
| 4-7-1 | Support Timing .....   | 6  |
| 4-7-2 | Part Names (HDMI Board) .....  | 7  |
| 4-7-3 | Image Input (HDMI) I/F .....   | 8  |
| 4-7-4 | Touchscreen Control USB I/F .....  | 8  |
| 4-7-5 | 12VDC Power Input I/F .....  | 9  |
| 4-7-6 | Pilot Lamp LED Control I/F .....   | 9  |
| 4-7-7 | Pilot Lamp LED .....   | 9  |
| 5     | Product Label .....  | 10 |
| 6     | Compliant Standards .....  | 10 |
| 6-1   | RoHS .....   | 10 |
| 7     | Appearance inspection standard .....   | 10 |
| 8     | Connecting Method .....  | 11 |
| 8-1   | Connecting Each Cable to User I/F of HDMI Board .....                        | 11 |
| 9     | Touchscreen Calibration .....  | 12 |
| 9-1   | Projected Capacitive Touchscreen .....                                       | 12 |
| 10    | Terms of Use .....   | 13 |
| 10-1  | Installing Projected Capacitive Touchscreen .....                            | 13 |
| 10-2  | Installing Module .....  | 14 |
| 10-3  | Precautions for Use of LCD .....   | 14 |
| 10-4  | Precautions for Projected Capacitive Touchscreen .....                       | 14 |
| 10-5  | Precautions for Static Electricity .....                                     | 15 |
| 10-6  | Operating Precautions .....  | 15 |
| 10-7  | Storing Precautions .....  | 15 |
| 10-8  | Handling Precautions .....   | 15 |
| 11    | Warranty .....   | 16 |
| 12    | Production Discontinuance .....  | 16 |
| 13    | Other .....  | 17 |
|       | Appendix   |    |
|       | ▪ Outline Drawing  |    |
|       | ▪ Glass/Glass Structure Projected Capacitive Touch Screen, Mounting Guidance |    |
|       | ▪ Touch Screen Controller Specification: DUS2200A Product Specification      |    |
|       | ▪ Appearance inspection standard   |    |
|       | (LCD Modules with Capacitive Glass Sensor Touchscreen)                       |    |

## 1 Summary

This is a “TK series Basic Set” with 12.1" Wide projected capacitive touchscreen sensor, controller, LCD(Liquid Crystal Display), and HDMI board put together in a sheet metal chassis.

## 2 Product Model

| Model            | Specification            |                         |                   |           |
|------------------|--------------------------|-------------------------|-------------------|-----------|
|                  | LCD size<br>(Resolution) | Touchscreen<br>Type     | Bonding<br>method | Set Type  |
| TK-BPA121WX-11A3 | 12.1" Wide<br>(WXGA)     | Projected<br>capacitive | Air-bonding *1    | Basic Set |

\*1. Bonding of LCD and touchscreen with double-sided tape.


### 3 Packaging Specification

| Contents         | Specification                       | Size (W x D x H)                    |
|------------------|-------------------------------------|-------------------------------------|
| TK-BPA121WX-11A3 | Grouped packaging<br>(5units/box) * | External Dimension: 456 x 412 x 319 |

\* May not be as specified according to the quantity shipped.

#### • Grouped Packaging Configuration

| No. | Name   | Qty |
|-----|--|-----|
| ①   | TK-BPA121WX-11A3<br>(placed inside anti-static, air-cushion bag) | 5   |
| ②   | Individual box   | 5   |
| ③   | Outer box  | 1   |
| ④   | Top Pad  | 2   |
| ⑤   | Side Pad   | 2   |
| ⑥   | Packaging label  | 5   |
| ⑦   | Grouped packaging label  | 1   |

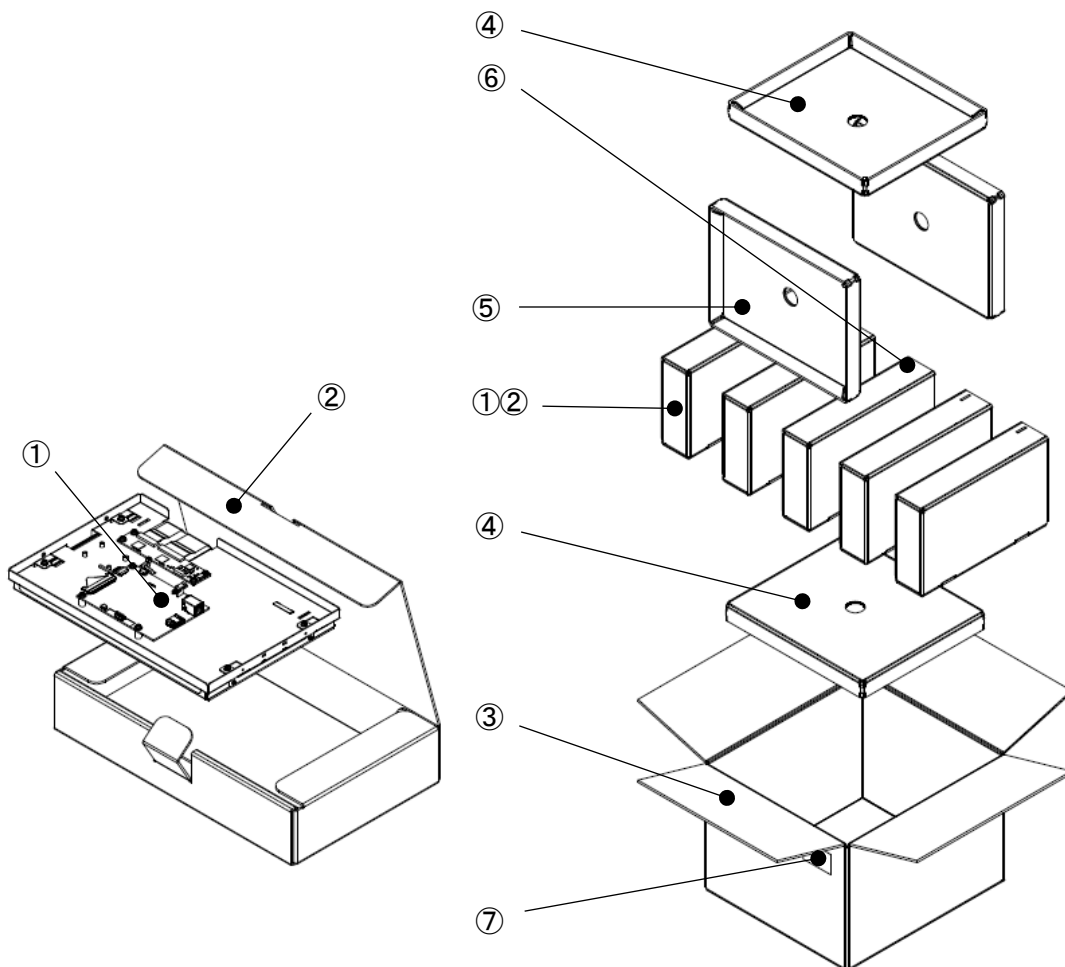

## 4 Module Specification

### 4-1 Function

| Item        |                                   | Specification                              | units             |      |
|-------------|-----------------------------------|--|-------------------|------|
| LCD         | Display device                    | 12.1" Wide TFT LCD                         | -                 |      |
|             | Display area (Active area)        | 261.12(W) ×163.2(H)                        | mm                |      |
|             | Pixels                            | 1280(W) ×800(H)                            | -                 |      |
|             | Pixel pitch                       | 0.204(W) ×0.204(H)                         | mm                |      |
|             | Color                             | 16.7M                                      | colors            |      |
|             | Brightness (Typ.)                 | 350  | cd/m <sup>2</sup> |      |
|             | View angle<br>(Typ.)              | Vertical (Upper/Lower)                     | 80 / 80           | deg. |
|             |                                   | Horizontal (Left/Right)                    | 80 / 80           |      |
|             | Interface                         | LVDS                                       | -                 |      |
|             | Backlight method                  | LED, with backlight driver                 | -                 |      |
|             | Backlight life *1                 | Typ. 50,000                                | hours             |      |
| Touchscreen | Touchscreen type                  | Projected Capacitive                       | -                 |      |
|             | Input method                      | Finger                                     | -                 |      |
|             | Maximum simultaneous input point  | 5 point *2                                 | -                 |      |
|             | Operating life(Continuous Typing) | 50 million times(finger input)             | -                 |      |
|             | Communication Method              | USB 2.0                                    | -                 |      |
|             | Supporting OS *3                  | Microsoft® Windows® 10/11<br>(32bit/64bit) | -                 |      |
| HDMI board  | Input image port                  | HDMI (does not support HDCP)               | -                 |      |
|             | Input<br>Signal                   | Digital                                    | HDMI 1.3b         |      |
|             |                                   | Horizontal scan cycle                      | 30K - 80K         | Hz   |
|             |                                   | Vertical scan cycle                        | 50 - 60           | Hz   |

\*1. Time until brightness declines by 50% from the initial value at maximum brightness in ambient temperature of 25°C.

\*2 The standard Windows touchscreen driver can be used, but operation may become unstable depending on the environment installed. Please perform calibration according to the instructions in "[Section 9. Touchscreen Calibration](#)".

\*3. Please contact us for information regarding OS other than Windows.

## 4-2 General Specification

| Item  |                     | Specification |
|-------|---------------------|---------------|
| Power | Input power voltage | 12VDC         |
|       | Voltage tolerance   | 12VDC±5%      |
|       | Power consumption * | Max. 14.7W    |

\* Excluding touchscreen controller.

Note: If the capacity of the power supply used is large, the drop in voltage when it is turned off will be gradual. When restarting, please turn on the power again after the power supply voltage becomes 0V.

## 4-3 Environment

| Item   | Specification   |
|--|---|
| Ambient operating temperature<br>(Inside cabinet and display side) | 0°C to 55°C   |
| Ambient storage temperature  | -20°C to 70°C   |
| Ambient operating humidity   | 10%RH to 85%RH<br>(Non-condensing. Wet-bulb temperature is 39 °C or less) |
| Ambient storage humidity   | 10%RH to 85%RH<br>(Non-condensing. Wet-bulb temperature is 39 °C or less) |
| Dust   | 0.1mg/m <sup>3</sup> or under (Conductive dust is prohibited)             |
| Corrosive Gas  | Corrosive gas is prohibited   |
| Pollution Degree   | Pollution Degree 2, for indoor use  |

## 4-4 Mechanical Specification

| Item   | Specification            |
|--|--------------------------|
| Mass   | Approx. 1360 g           |
| External dimensions (excluding protruding parts) | 287(W)×190(H)×(40)(D) mm |

## 4-5 Touchscreen Controller

Please refer to the attached touchscreen specification for details.

## 4-6 Touchscreen Driver

To obtain the touchscreen driver (DMT-DD), please download it from the following site.

URL: <https://www.dush.co.jp/english/download/>

Download > Driver-App > Touchscreen Related > Touchscreen Driver.


For DMT-DD installing directions, please refer to the User's Guide included in the downloaded files.

## 4-7 HDMI Board

### 4-7-1 Support Timing

| No | Resolution | Aspect Ratio | Refresh Rate |
|----|------------|--------------|--------------|
| 1  | 640×480p   | 4: 3         | 60Hz         |
| 2  | 720×480p   | 4: 3         | 60Hz         |
| 3  | 800×600p   | 4: 3         | 56Hz         |
| 4  | 800×600p   | 4: 3         | 60Hz         |
| 5  | 1024×768p  | 4: 3         | 60Hz         |
| 6  | 1280×720p  | 16: 9        | 60Hz         |
| 7  | 1280×960p  | 4: 3         | 60Hz         |
| 8  | 1280×1024p | 5: 4         | 60Hz         |
| 9  | 1600×900p  | 16: 9        | 60Hz         |
| 10 | 1600×1200p | 4: 3         | 60Hz         |
| 11 | 1680×1050p | 16: 10       | 60Hz         |
| 12 | 1920×1080p | 16: 9        | 60Hz         |

#### 4-7-2 Part Names (HDMI Board)

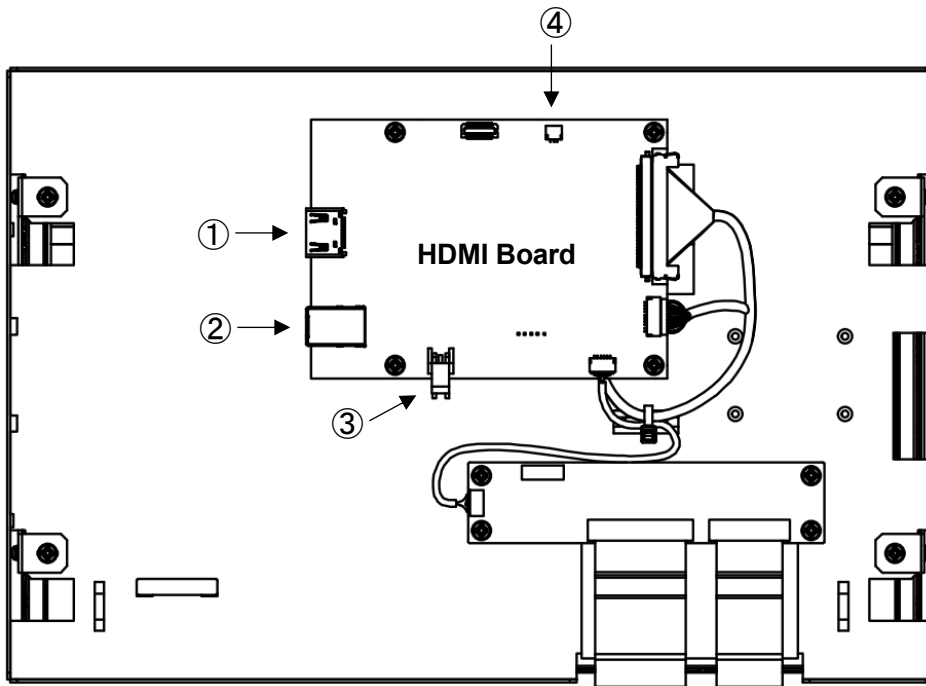

| No. | Interface Name                                 |
|-----|--|
| ①   | Image input (HDMI)                             |
| ②   | Touchscreen control USB<br>(USB 3.0 Type-B) *1 |
| ③   | 12VDC Power input (Nylon connector)            |
| ④   | Pilot lamp LED control                         |

\*1 USB2.0 Type-B can be connected.

\*2 Use of other connectors not listed is prohibited. They are for internal adjustments only and may be excluded without prior notice.




#### 4-7-3 Image Input (HDMI) I/F

Connector No.: CN7

Interface: HDMI Type A

Note: HDMI standard compliant

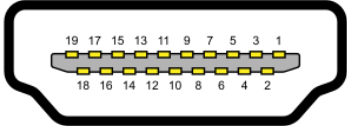
| PIN No | Signal Name       | PIN No | Signal Name       | Schematic Diagram   |
|--------|-------------------|--------|-------------------|---|
| 1      | TMDS Data2+       | 11     | TMDS Clock Shield |  |
| 2      | TMDS Data2 Shield | 12     | TMDS Clock-       |   |
| 3      | TMDS Data2-       | 13     | CEC (NC)          |   |
| 4      | TMDS Data1+       | 14     | Reserved          |   |
| 5      | TMDS Data1 Shield | 15     | DDC Clock         |   |
| 6      | TMDS Data1-       | 16     | DDC Data          |   |
| 7      | TMDS Data0+       | 17     | DDC GND           |   |
| 8      | TMDS Data0 Shield | 18     | +5V Power         |   |
| 9      | TMDS Data0-       | 19     | Hot Plug Detect   |   |
| 10     | TMDS Clock+       | -      | -                 |   |

#### 4-7-4 Touchscreen Control USB I/F

Connector No.: CN4

Interface: USB3.0

Connector: USB3.0 Type-B
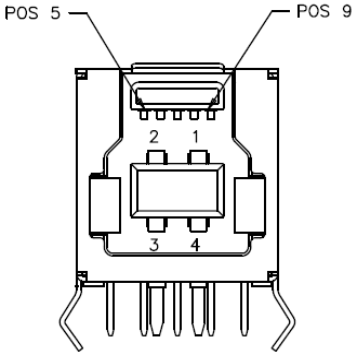
| PIN No. | Signal Name | Description            | Schematic Diagram  |
|---------|-------------|------------------------|--|
| 1       | VBUS (5V)   | Power                  |  <p>View from connector inserting side</p> |
| 2       | D-          | USB 2.0                |  |
| 3       | D+          |                        |  |
| 4       | GND         | GND for power return   |  |
| 5       | StdB_SSTX-  | SuperSpeed transmitter |  |
| 6       | StdB_SSTX+  |                        |  |
| 7       | GND_DRAIN   | GND for signal return  |  |
| 8       | StdB_SSRX-  | SuperSpeed receiver    |  |
| 9       | StdB_SSRX+  |                        |  |
| 10      | Shield      |                        |  |

\* USB port for touchscreen control (can be connected to USB2.0 Type-B).


#### 4-7-5 12VDC Power Input I/F

Connector No.: CN1

Interface: +12VDC Input

Connector: A3963WR2-2P(JWT)

Note: Equivalent to S2P-VH(JST)

| PIN No. | Signal Name | Schematic Diagram   |
|---------|-------------|---|
| 1       | +12V        |  |
| 2       | GND         |   |

#### 4-7-6 Pilot Lamp LED Control I/F

Connector No.: CN10

Connector: 1010-SMTR-03P(JWT)

Note: Equivalent to SM03B-SRSS-TBT (JST)

| PIN No. | Signal Name |
|---------|-------------|
| 1       | LED_G       |
| 2       | GND         |
| 3       | LED_R       |

Note: Power supply 3.3V, limiting resistance 220Ω (board built-in)

#### 4-7-7 Pilot Lamp LED

By preparing a LED board (refer to following circuit board diagram), the power of the HDMI board and the status of the image input signal can be indicated by LED.


- **Status Indicating LED (Example)**

Green lit: Power ON, with image input signal


Orange lit: Power ON, without image input signal.

LED off: Power OFF

- **Circuit diagram (Example)**

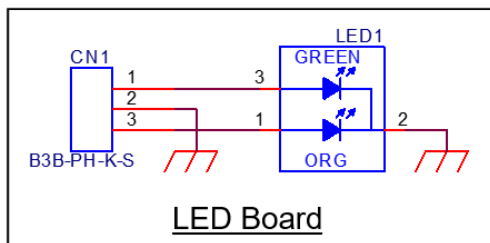

## 5 Product Label

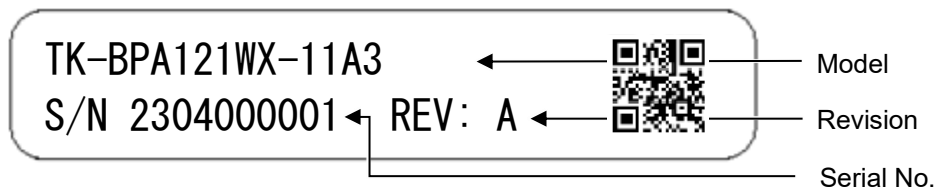

Above is an image example of the product label.

Below information will be indicated on the actual product.

- Model: Product Model
- Serial No.: 10 digit control number
- Revision: Alphabets (A to Z) according to the product revision

## 6 Compliant Standards

### 6-1 RoHS

Compliant to EU RoHS directives.


## 7 Appearance inspection standard

Please refer to "Appearance inspection standard(LCD Modules with Capacitive Glass Sensor Touchscreen)" (22G4GX-00002E) for standards.

## 8 Connecting Method

### 8-1 Connecting Each Cable to User I/F of HDMI Board


(1) Connecting the HDMI cable and the USB cable.

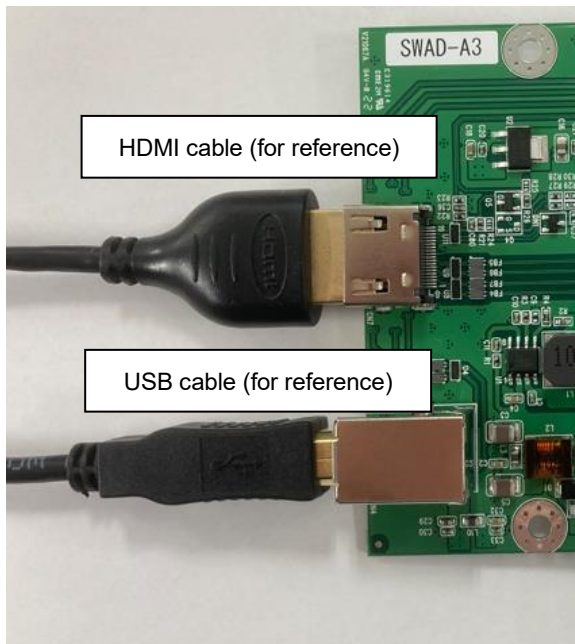

\* Please insert securely.

\* HDMI cable/ USB cable not included.

(2) Connecting the Power cable.

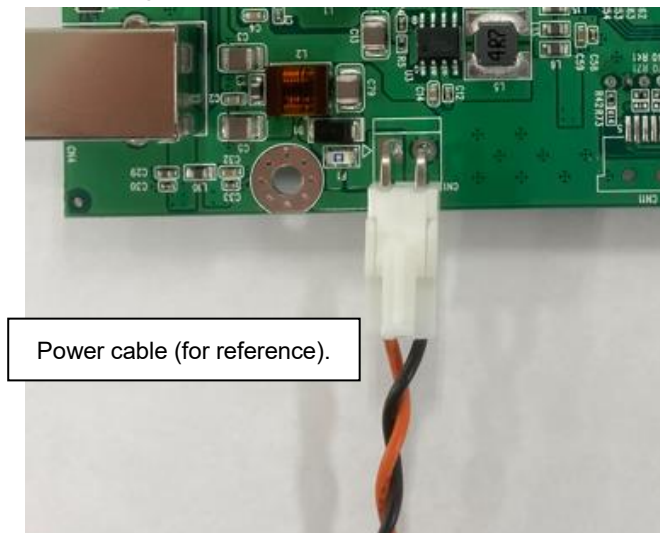

\* Please insert securely.

\* Power cable not included.

## 9 Touchscreen Calibration


Touchscreen operations may become unstable depending on the installation environment due to its characteristics. To use it correctly, please perform calibration when building into a device.

Install DMT-DD from "[4.6. Touchscreen Driver](#)" when calibrating.

### 9-1 Projected Capacitive Touchscreen


[TPOffset] ...Sensitivity calibration.

- (1) Start DMT-DD.
- (2) Open [Touchscreen Maintenance] via [Basic Setting] > [Hardware Setting] and click [Open].

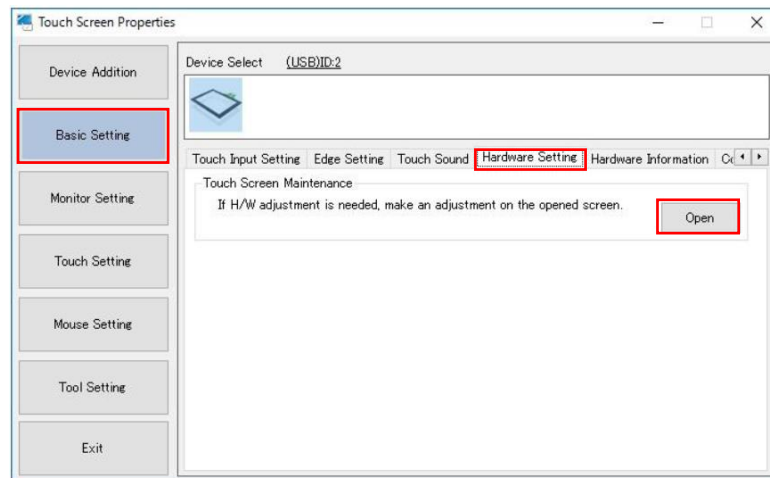

- (3) Hardware calibration is complete when [Dev.0] [DONE] [0x00] turns green.

Maintenance Tool Screen (Example)

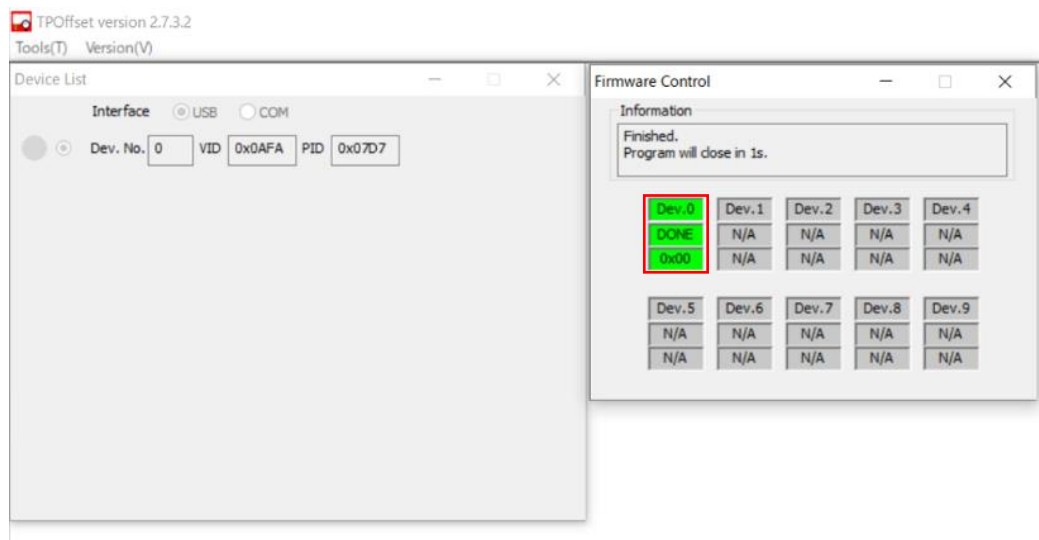

\*[Setup Tool] cannot be operated while the [Maintenance Tool] is running.

\*Please do not touch the touchscreen when calibration is being performed.

\*This tool will automatically terminate.


## 10 Terms of Use

### 10-1 Installing Projected Capacitive Touchscreen

- ❶ If surrounding environment changes or materials to alter the electrical field (a large capacitor, power-supply unit, LCD panel, or materials with high dielectric constant) is near, these external factors will adversely affect the function of the touch screen to detect the correct input positions.
- ❷ At structure design, please refer to the mounting guidance below and ensure enough gap distances among each component in order to avoid the external factors described above.


(1) When placing the panel and touchscreen on same surface

- Place keep a distance of at least 2mm or more between panel and touchscreen and 1mm or more from the FPC tail.

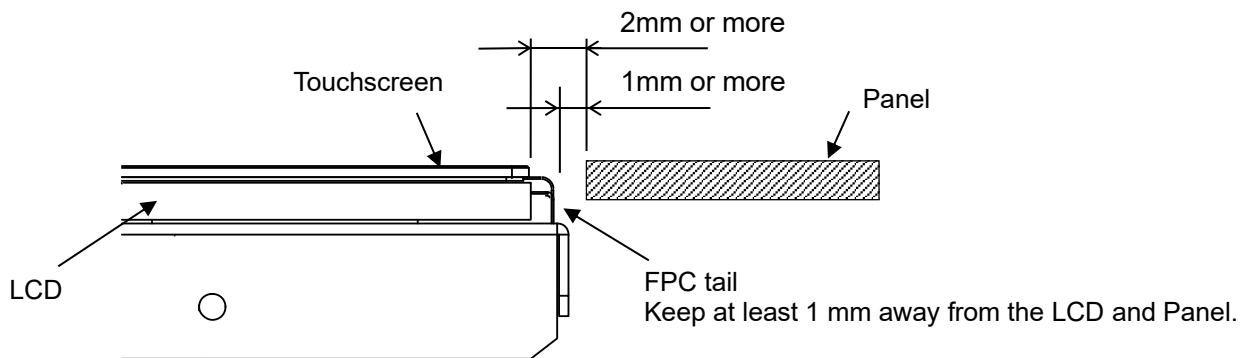

(2) When bezel comes on top of touchscreen surface

- It is recommended that the bezel placed on the top of the touchscreen is made of insulating resin. Please make sure to keep a distance (L1) between the touchscreen and the bezel as seen in below diagram.
- When sheet metal bezel is used, capacitive coupling with the sheet metal may occur at the outer periphery of the active area. When designing the bezel with metal materials such as sheet metal, ensure that the gap L2 between the touchscreen and the bezel is about 2 mm.
- Please keep the FPC tail of the touchscreen as far as possible from the metal.

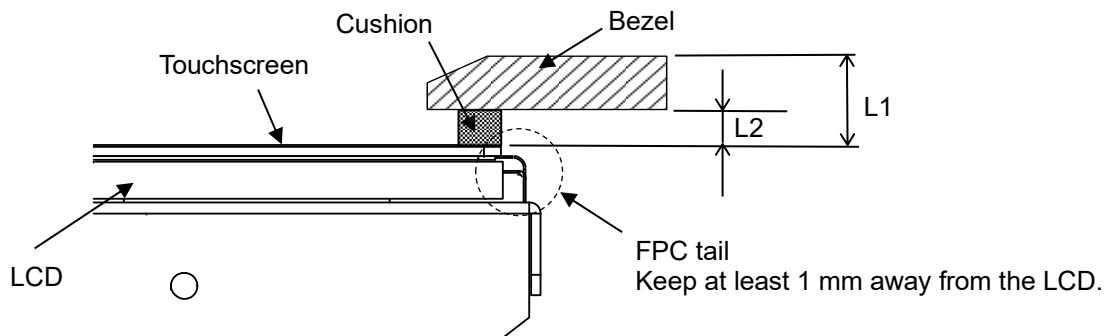

Please make sure the below dimensions are kept to prevent the touchscreen from malfunctioning.

L1  $\geq$  2mm : Distance between bezel surface/ touchscreen.

L2  $\geq$  2mm : When using a sheet metal bezel, it is recommended that a distance of more than 2mm is secured between the touchscreen and the back side of the bezel.

## **10-2 Installing Module**

- (1) Make sure there are no warping and twisting when installing.
- (2) Make sure the specified temperature and humidity between the module and structure or parts is taken into consideration to secure ventilation.
- (3) Take anti-static measures such as wearing grounding arm bands during assembly.
- (4) To prevent malfunction or damage, make sure the connector of connecting cable is inserted securely.

## **10-3 Precautions for Use of LCD**

- (1) The LCD contains irritants inside. If by any chance the liquid should flow out due to damages and come in contact with the skin, wash immediately under running water for more than 15 minutes and consult a physician.
- (2) LCD may have uneven brightness depending on the contents displayed. Please note that this is not a malfunction.
- (3) LCD elements may have spots (black spots/ bright spots). This is a characteristic of the LCD and not a malfunction.
- (4) When screen is viewed outside the viewing angle, the color displayed may appear to change. This is a basic characteristic of the LCD and not a malfunction.
- (5) When the same screen is displayed for a certain long period of time, the image may remain as an afterimage. This is a basic characteristic of the LCD.  
In order to avoid afterimages, use a screensaver or other similar functions to periodically change the display and avoid displaying the same image for a long period of time.

## **10-4 Precautions for Projected Capacitive Touchscreen**

- (1) If elements that change ambient environments or electric fields (capacitors with large capacity, power units, and materials with high permittivity such as metals) are set close to the product, it might have impact to the coordinate detection. Make sure to keep a good distance from the above unstable elements as much as possible when designing.
- (2) Due to the characteristics of the touchscreen, its functions might become unstable according to the environment it is installed. For correct operations, perform sensitivity sensor calibration when building into a device. Also if at any time the touchscreen operation become unstable due to changes in environment or installation conditions, perform sensitivity sensor calibration.
- (3) The touchscreen surface is made of glass. Glass becomes easy to break if scratched. Please handle with care and avoid glass from coming in contact with other glass and hard objects.
- (4) Touchscreen may not operate correctly when there is moisture on the surface. When moisture is detected on the touchscreen surface, please wipe it dry before use.
- (5) Handle When designing applications, consider the fact that area slightly outside the display might be read as a coordinate due to the characteristics of the touchscreen when touched.
- (6) Be careful when handling the end face of the glass as it is easily injured.

### **10-5 Precautions for Static Electricity**

- (1) Static Electricity may cause damages. Please take sufficient measurements when handling.
- (2) Take anti-static measures such as wearing grounding arm bands during assembly.

### **10-6 Operating Precautions**

- (1) When used outside the specification standards, it may significantly affect product quality and service life, such as degradation of display quality and generation of air bubbles. Please be sure to use within the specifications.

### **10-7 Storing Precautions**

- (1) When storing the module, please avoid areas of high temperature and humidity. Especially when storing for a long period of time, make sure to store in a place that is not be exposed to direct sunlight and/or fluorescent lighting.
- (2) Please store the module in a condition where it is not subject to excessive load.

### **10-8 Handling Precautions**

- (1) Do not leave the product in an environment with high temperature for a prolong period. Make sure to avoid high humidity especially when the temperature is above 40°C. Failing to do so may cause polarizing plate deterioration, peeling, and/or bubbles to form.
- (2) If the surface of the polarizing plate becomes dirty, wipe it lightly with a soft material such as cotton cloth moistened with a small amount of ethyl alcohol.
- (3) Make sure to wipe off immediately any form of liquids to avoid deformation, discoloration or fading of the polarizing plate.
- (4) Condensation on the polarizing plate during testing is prohibited to prevent staining, discoloration, or spots to form on the plate.
- (5) Disassembling and/or changing the volume of the module is prohibited. Doing so may cause malfunction and failure to perform correctly.
- (6) This product is intended for use in general electronic equipment and is not intended for use in special environments such as corrosive gas atmosphere. If use in a special environment is anticipated, please evaluate the product thoroughly or take precautions not to expose the LCD to corrosive gases, etc.
- (7) This product is intended for use in standard applications (office equipment, industrial, communication, and household equipment, etc.). Do not use the products for special applications that require extremely high reliability (e.g., aerospace, nuclear power control, medical applications for life support, etc.) or where malfunctions or failures may directly cause injuries to the human body.
- (8) Do not rub or press the product with hard or sharp objects.
- (9) Keep away from flames/fire.
- (10) Avoid wiping the product with excessive pressure.
- (11) Avoid locally rubbing the product with strong pressure. It may cause damage to the function of the touchscreen.
- (12) When operating the product, please avoid striking it with a hard object.
- (13) Do not forcibly fold or bend the product.



- (14) When storing the product, use the packing box and keep the product within the specified storage temperature and humidity and in an environment where it is free of excessive pressure and loads.
- (15) Avoid using and storing the product where it can be exposed to or can come in contact with liquids, organic solvents, and acidic atmosphere.
- (16) Avoid using the product in direct sunlight.
- (17) Do not pull off or disassemble the product.
- (18) When handling the product, hold the main unit and not the touchscreen FPC (tail).
- (19) EMC (EMS, EMI) evaluation is not conducted at shipment. Please conduct overall evaluation and confirmation after the product has been installed in your equipment.

## **11 Warranty**

The warranty period is limited to 12 months (1 year) from the date of shipment. Any defects that occur upon normal use under conditions specified herein will be repaired (factory repair) free of charge. (Warranty for any repair needed to the same repaired part of the same product is three months.)

You will be liable for all repair fees even within the warranty period for any conditions listed below.

- (1) Any malfunctions, defects, and/or damages that occurred during transport, transfer, or mishandling by the user after delivery.
- (2) Any malfunctions, defects, and/or damages caused by natural or man-made disaster.
- (3) If the product is used under any condition, environment, or method other than those specified in the specifications, catalogs, manuals, notes, and/or other documents.
- (4) Any malfunctions, defects, and/or damages caused by connected equipment and/or usage of inappropriate consumables and media.
- (5) If the product is repaired, remodeled, modified, or disassembled by a party other than DMC Co., Ltd, or if a serial number label cannot be verified.
- (6) Any failure, damage, or malfunction is deemed to be caused on your behalf.

This warranty covers only the product itself. No warranty is provided for damages, on-site repair, or replacement resulting from product failure.

All damaged parts are subject for replacement and freight will be charged.

## **12 Production Discontinuance**

In the event of production discontinuance, an announcement will be made six months prior to the last possible order reception date.

## 13 Other

For comments or queries, feel free to contact us.

North South America area

[technical-global@dush.co.jp](mailto:technical-global@dush.co.jp)

Asia Pacific area

[technical-global-asia@dush.co.jp](mailto:technical-global-asia@dush.co.jp)

Europe, Middle East, Africa area

[technical-global-eu@dush.co.jp](mailto:technical-global-eu@dush.co.jp)

FAQ

<https://www.dush.co.jp/english/support/faq/>

---

3rd Edition, March 2024

DMC Co., Ltd.

Business hours: 9:00a.m.~5:00p.m. (JST)






URL: <https://www.dush.co.jp/english/>

This document is protected by copyright law. Photocopying, duplicating, reproducing, and modifying of this product or document in part or by whole is prohibited.

Copyright(C) 2024 DMC Co., Ltd. All Rights Reserved

| 寸法許容差<br>呼び寸法<br>Nominal Dimensions | TOLERANCE  |
|-------------------------------------|------------|
| $L \leq 3$                          | $\pm 0.4$  |
| $3 < L \leq 6$                      | $\pm 0.48$ |
| $6 < L \leq 10$                     | $\pm 0.58$ |
| $10 < L \leq 18$                    | $\pm 0.7$  |
| $18 < L \leq 30$                    | $\pm 0.84$ |
| $30 < L \leq 50$                    | $\pm 1.0$  |
| $50 < L \leq 80$                    | $\pm 1.2$  |
| $80 < L \leq 120$                   | $\pm 1.4$  |
| $120 < L \leq 180$                  | $\pm 1.6$  |
| $180 < L \leq 250$                  | $\pm 1.85$ |
| $250 < L \leq 315$                  | $\pm 2.1$  |
| $315 < L \leq 400$                  | $\pm 2.3$  |
| $400 < L \leq 500$                  | $\pm 2.5$  |

| SYM | 改訂日<br>DATE | 改訂内容<br>DESCRIPTION | ページ<br>PAGE | 担当<br>DESIGNED |
|-----|-------------|---------------------|-------------|----------------|
|     | 2023.07.25  | 新規図面登録              | -           | S. Takada      |

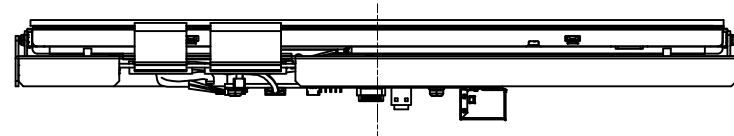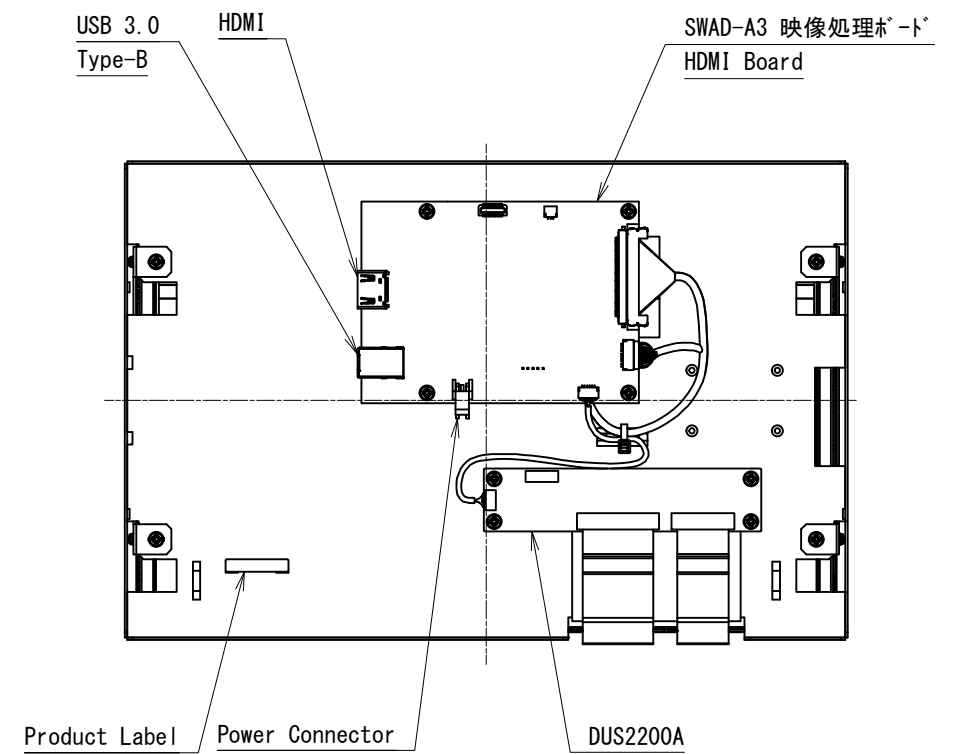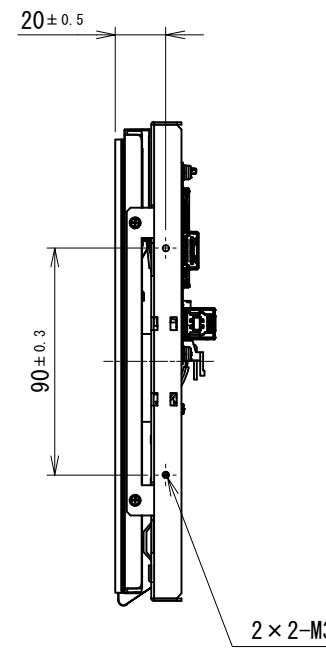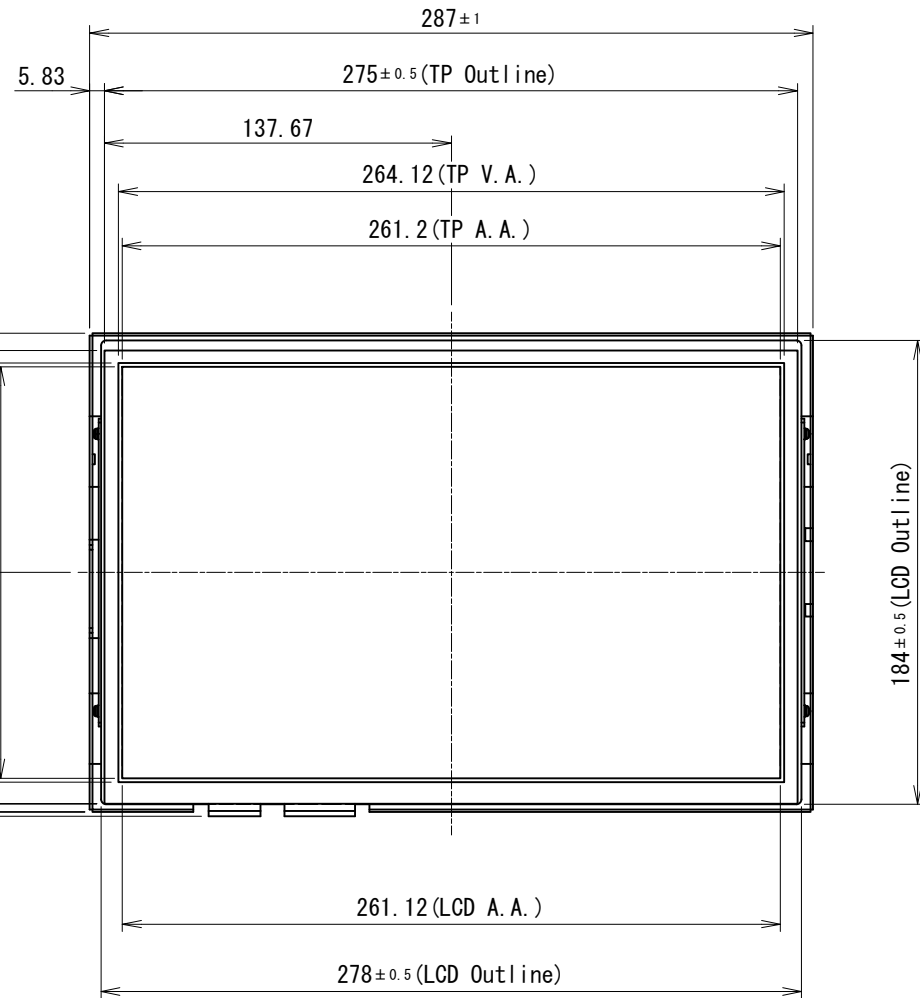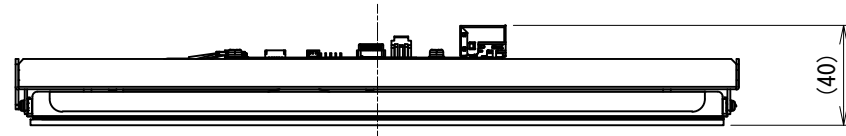

NOTES

1. 指示なき寸法公差は寸法公差表の通りとする。  
Tolerance shall be of dimensional tolerance table unless specified otherwise.

|                |              |               |                 |               |                         |                          |                           |
|----------------|--------------|---------------|-----------------|---------------|-------------------------|--------------------------|---------------------------|
| 製図日<br>ISSUED  | 2023.07.25   | 部署<br>SECTION | Technical Dept. | 尺度<br>SCALE   | CAD登録名<br>CAD FILE NAME | OUTLINE_TK-BPA121WX-11A3 | RoHS対応品<br>RoHS compliant |
| 承認<br>APPROVED |              | 検図<br>CHECKED |                 | 1:3           | 製品名<br>MODEL            | TK-BPA121WX-11A3         |                           |
|                |              | 製図<br>DRAWN   | S. Takada       | 単位<br>UNIT    | 図名<br>TITLE             | OUTLINE                  | ページ<br>PAGE               |
| T. Okada       | S. Yoshimoto |               | S. Takada       | mm            |                         |                          | 1 / 1                     |
| DMC Co., Ltd.  |              |               | A3              | 図番<br>DWG No. | SM3-002381-10           |                          |                           |

## Glass/Glass Structure Projected Capacitive Touch Screen, Mounting Guidance

Projected capacitive touch screen detects the touched locations by measuring the increased amount of the capacitance value between its electrodes. Once it is built into a system, capacitance couplings are continually yielded among the touchscreen, FPC tail, controller board and metal Chassis.

If surrounding environment changes or materials to alter the electrical field (a large capacitor, power-supply unit, LCD panel, or materials with high dielectric constant) is near, these external factors will adversely affect the function of the touch screen to detect the correct input positions.

At structure design, please refer to the mounting guidance below and ensure enough gap distances among each component in order to avoid the external factors described above.

- Refer to the drawing of the touch screen, and take into account the tolerances at structure design.
- Fix the touchscreen firmly so that the gap distances between the touchscreen and other components will not be affected by touching or will not change with the passage of time. An unexpected input may be caused if the gap is too narrow.
- In case of using capacitive sensor outside, the moisture may cause the trouble.
- In order to avoid the gap distance L1 from being changed with the passage of time, it is recommended to apply the adhesive tape onto all the 4 sides with no space (fully sealed) when gluing the touch screen.


The distance values indicated in this sheet are for reference only.

The appropriate distance values depend on touch screen size, LCD, chassis design and other factors.

Please confirm the appropriate distances with the actual products prior to fixing the chassis design.

### Structure with Bezel

- It is recommended to use an insulating resin material for the bezel. Ensure the gap between the touch screen and front bezel (L4)
- If a metal material is used for the bezel, unintended capacitance couplings may occur on the periphery of the active area.  
If a metal material is used for bezel, ensure the gap of approximately 2mm between touch screen and bezel (L2).
- In order to avoid the gap distance L1 from being changed with the passage of time, it is recommended to apply the adhesive tape onto all the 4 sides with no space (fully sealed) when gluing the touch screen.

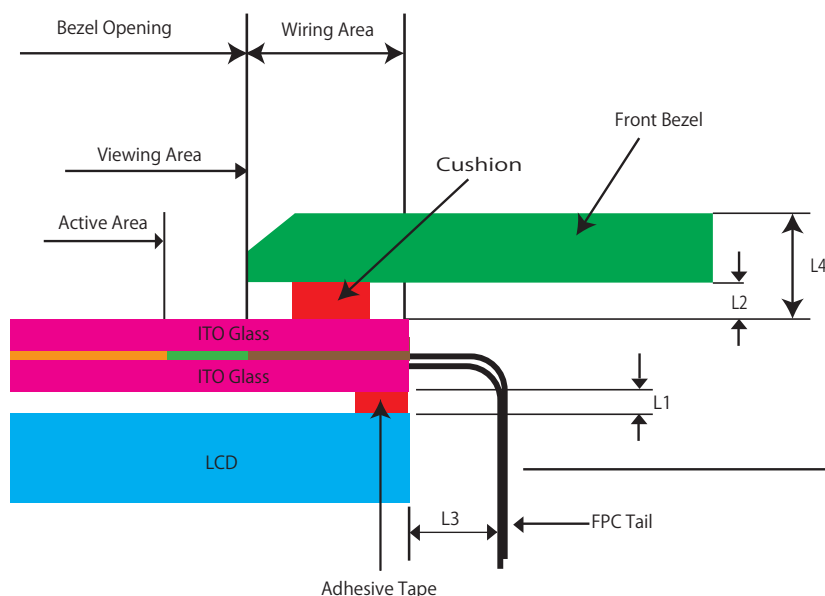

$L4 \geq 2\text{mm}$ : Distance between touch screen and bezel surface

$L2 \geq 2\text{mm}$ : If the bezel is metal, at least 2mm would be needed between the touch screen and bottom of the bezel.


$L1 \geq 1\text{mm}$ : Distance between touch screen and LCD bezel


$L3 \geq 1\text{mm}$ : Distance between LCD and FPC Tail

The FPC tail must not be forcibly stressed or bent too hard. The conduction in the insulated area and/or wire breaking may be caused. For the specifications of FPC bending, refer to the product specifications of the touch screen.

## Flat-surface Structure (Covering glass is needed)

- In order to avoid the gap distance L1 from being changed with the passage of time, it is recommended to apply the adhesive tape onto all the 4 sides with no space (fully sealed) when gluing the touch screen.

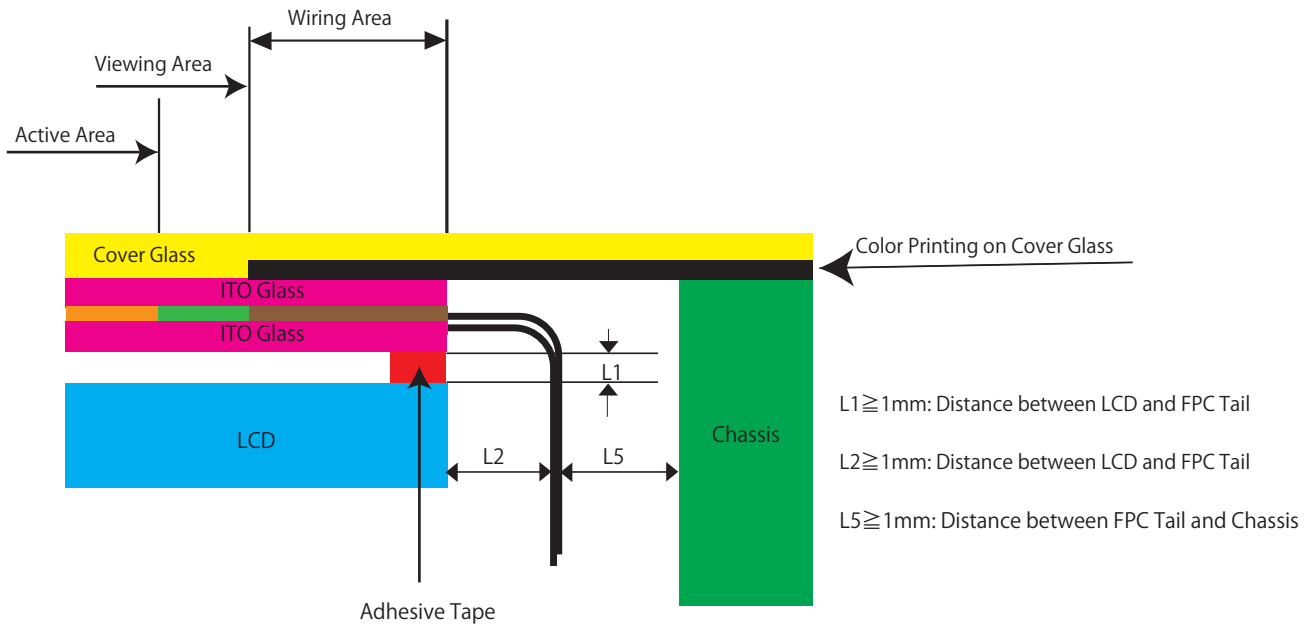

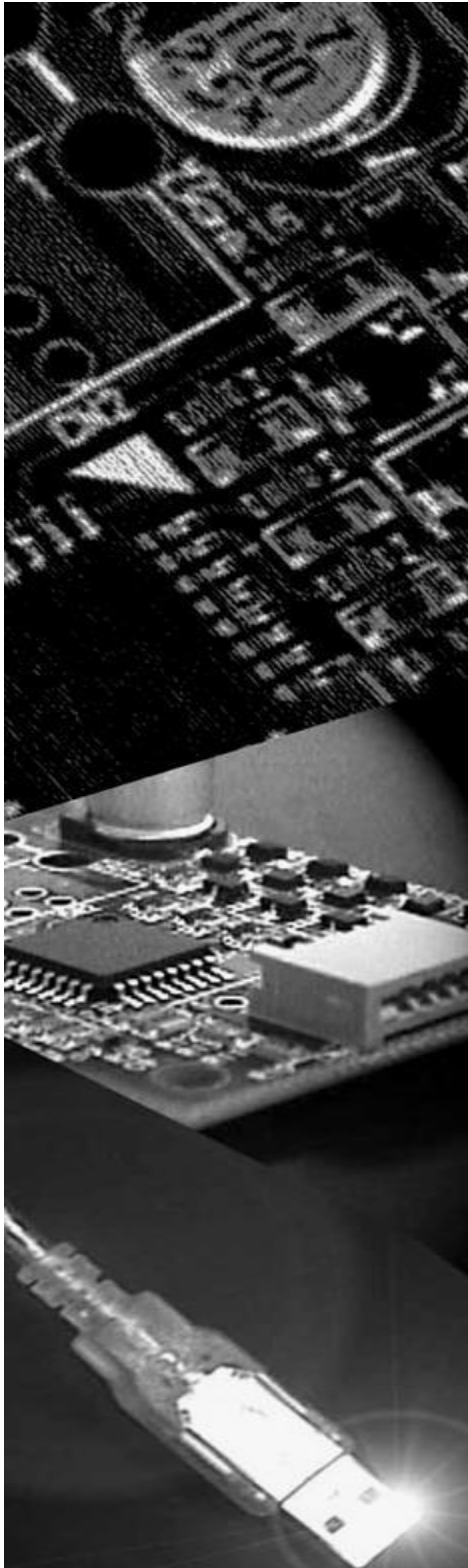

**DMC Co., Ltd.**

**Controller Board for Projected Capacitive Touch Screen  
DUS2200A Product Specification**

## Table of Contents

|  |           |
|--|-----------|
| <b>1. Applicable Product</b> .....                     | <b>2</b>  |
| <b>2. Product Specification</b> .....                  | <b>2</b>  |
| 2.1. Touch Screen Board Specification .....            | 2         |
| 2.2. Host Interface.....                               | 3         |
| 2.2.1. USB Interface.....                              | 3         |
| 2.2.2. Serial Interface .....                          | 3         |
| 2.2.3. I2C Interface.....                              | 3         |
| 2.3. Electrical Specification.....                     | 4         |
| 2.3.1. Maximum Absolute Rating .....                   | 4         |
| 2.3.2. DC Characteristics .....                        | 4         |
| 2.3.3. USB Signal (D+, D-) DC Characteristics.....     | 4         |
| 2.3.4. UART Signal (Rx, Tx) DC Characteristics.....    | 4         |
| 2.3.5. I2C (SCL, SDA, I2C_INT) DC Characteristics..... | 5         |
| 2.3.6. RESETn Signal DC Characteristics.....           | 5         |
| 2.4. Timing Requirements.....                          | 6         |
| 2.4.1. Power-on Reset.....                             | 6         |
| 2.4.2. nRESET Reset (External Reset) .....             | 6         |
| 2.4.3. Low Voltage Reset.....                          | 7         |
| 2.4.4. External Clock Timing.....                      | 7         |
| 2.4.5. Clock Input Circuit.....                        | 8         |
| 2.4.6. Input Equivalent Circuit of Reset Signal.....   | 8         |
| 2.5. Connector Pin Assignment.....                     | 9         |
| 2.5.1. Connector Information .....                     | 9         |
| 2.5.2. Connector Terminal.....                         | 9         |
| <b>3. Precautions</b> .....                            | <b>10</b> |
| <b>4. Warranty</b> .....                               | <b>10</b> |
| 4.1. Warranty Period .....                             | 10        |
| 4.2. Warranty Target.....                              | 10        |
| 4.3. Warranty Exceptions.....                          | 10        |
| <b>5. Precautions for Use</b> .....                    | <b>11</b> |
| 5.1. General Handling.....                             | 11        |
| 5.2. Others .....                                      | 11        |
| <b>6. Version History</b> .....                        | <b>11</b> |

## Outline Dimensional Drawing

## 1. Applicable Product

This specification sheet is applied to DUS2200A touch screen controller board.

## 2. Product Specification

### 2.1. Touch Screen Board Specification

| Item                       |  | Specification                 | Remark  |
|----------------------------|--|-------------------------------|---|
| Touch Detection Principle  |  | Projected Capacitive          |   |
| Host Interface             |  | USB Full Speed<br>UART<br>I2C | Compatibility with UART or I2C depends on firmware.<br>Please check with our sales for compatibility. |
| Input Power-supply Voltage |  | 4.75~5.25[V]                  |   |
| Driving Voltage            |  | 18V                           |   |
| Operating Temp             |  | -40 [°C] to 85 [°C]           | No dew condensation   |
| Storing Temp               |  | -40 [°C] to 85 [°C]           | No dew condensation   |
| Main IC                    |  | MCU 1 [pc]                    |   |
|                            |  | Sensor IC 2 [pcs]             |   |
| Number of Electrodes       | Electrode (X)                            | 52 (Max)                      |   |
|                            | Electrode (Y)                            | 38 (Max)                      |   |
| Coordinate Performance     | Normal Coordinate Number to Output       | 5 [Finger]                    | Maximum 30  |
|                            | Report rate (1 finger)                   | 100 [Hz]                      | *2  |
|                            | Report rate (2 finger)                   | 100 [Hz]                      | *2  |
|                            | Report rate (2 finger at same axis)      | 100 [Hz]                      | *2  |
|                            | Electrode resolution                     | 256 [1/Electrode]             |   |
|                            | 2 finger minimum distance (X)            | 3.5 [Electrode]               | 21[mm] @ 6[mm]◇   |
|                            | 2 finger minimum distance (Y)            | 3.5 [Electrode]               | 21[mm] @ 6[mm]◇   |
|                            | Coordinate Accuracy (high accuracy area) | Max ±3.0mm                    | *1  |
|                            | Coordinate Accuracy (low accuracy area)  | Max ±6.0mm                    |   |
|                            | Low accuracy area                        |                               | 3 [Electrode]   |
| Low Power Mode             |  | USB Suspend mode              |   |
| Calibration                | Calibration function                     | Support                       |   |
|                            | Calibration Time                         | Max 10 [sec]                  | *3  |

\*1.Touch contact size:φ10. The indicated coordinate accuracies are performances under a noise-free environment. The accuracy may significantly drop due to extrinsic noises and surrounding environment.

\*2.The indicated values depend on software noise filter and CR values of the sensor glass. This specification is of the operation by normal clock scan.

\*3.Calibration Time varies according to size of the touch screen.



## 2.2. Host Interface

### 2.2.1. USB Interface

| Item               | Specification  | Remark          |
|--------------------|--|-----------------|
| Host Interface     | USB 2.0 Full speed 12[Mbps]                              |                 |
| Power supply       | Bus-powered  |                 |
| Power type         | High power device  |                 |
| VendorID/ProductID | 0x0AFA / 0x07D7<br>(At firmware update: 0x0AFA / 0x07D6) |                 |
| Power save mode    | USB Suspend mode<br>(compliant to USB specification)     | Except current. |

### 2.2.2. Serial Interface

| Item           | Specification             | Remark |
|----------------|---------------------------|--------|
| Host Interface | UART Baud Rate 57.6[Kbps] |        |
| Data bits      | 8                         |        |
| Stop bit       | 1                         |        |
| Parity check   | None                      |        |

### 2.2.3. I2C Interface

| Item                 | Specification  | Remark    |
|----------------------|--|-----------|
| Slave address        | 0x5C   |           |
| Transfer speed       | 400 kbps   | Fast mode |
| Transfer data length | Maximum 255 bytes + Length 1 bytes                         |           |
| Slave mode           | Single master IC only.<br>Multi-master IC is not supported |           |

**2.3. Electrical Specification**

2.3.1. Maximum Absolute Rating

| Item           | Specification |      |      | Unit | Remark |
|----------------|---------------|------|------|------|--------|
|                | Min.          | Typ. | Max. |      |        |
| Supply Voltage | -0.3          | —    | 6    | V    |        |

2.3.2. DC Characteristics

Board Consumption Current

Test Condition: TA = 25°C, VCC = 5V

| Item                  | Specification |      |      | Unit | Remark   |
|-----------------------|---------------|------|------|------|--|
|                       | Min.          | Typ. | Max. |      |  |
| Supply Voltage        | 4.75          | 5    | 5.25 | V    |  |
| Normal operation mode |               | 90.0 |      | mA   | Report rate:100Hz<br>10 Finger, 23inch<br>USB Vbus |
| Suspend mode          |               | 30.0 |      | mA   | USB Vbus   |

2.3.3. USB Signal (D+, D-) DC Characteristics

| Item                | Specification |      |      | Unit | Remark |
|---------------------|---------------|------|------|------|--------|
|                     | Min.          | Typ. | Max. |      |        |
| Input High Voltage  | 2.0           | -    | 3.3  | V    |        |
| Input Low Voltage   | 0             | -    | 0.8  | V    |        |
| Output High Voltage | 2.8           | -    | 3.6  | V    |        |
| Output Low Voltage  | 0             | -    | 0.3  | V    |        |

2.3.4. UART Signal (Rx, Tx) DC Characteristics

| Item                     | Specification |      |      | Unit | Remark |
|--------------------------|---------------|------|------|------|--------|
|                          | Min.          | Typ. | Max. |      |        |
| Input High Voltage (Rx)  | 2.0           | -    | 3.3  | V    |        |
| Input Low Voltage (Rx)   | 0             | -    | 0.8  | V    |        |
| Output High Voltage (Tx) | 2.4           | -    | 3.3  | V    |        |
| Output Low Voltage (Tx)  | 0             | -    | 0.4  | V    |        |

## 2.3.5. I2C (SCL, SDA, I2C\_INT) DC Characteristics

| Item               | Specification |      |      | Unit | Remark |
|--------------------|---------------|------|------|------|--------|
|                    | Min.          | Typ. | Max. |      |        |
| Input High Voltage | 2.0           | -    | 3.3  | V    |        |
| Input Low Voltage  | 0             | -    | 0.8  | V    |        |
| Output Low Voltage | 0             | -    | 0.4  | V    |        |

SCL, SDA, I2C\_INT is output by Open drain.

SCL, SDA, I2C\_INT is Pullup on DUS1200. (SCL, SDA=3.3V\_4.7kΩ, I2C\_INT =3.3V\_10kΩ)


## 2.3.6. RESETn Signal DC Characteristics

| Item                | Specification |      |      | Unit | Remark |
|---------------------|---------------|------|------|------|--------|
|                     | Min.          | Typ. | Max. |      |        |
| Input High Voltage  | 2.3           | -    | 3.3  | V    |        |
| Input Low Voltage   | 0             | -    | 0.9  | V    |        |
| Minimum pulse width | 1.0           | -    | -    | ms   |        |


## 2.4. Timing Requirements

### 2.4.1. Power-on Reset

| Item                          | Symbol            | Specifications |      |      | Unit | Remark   |
|-------------------------------|-------------------|----------------|------|------|------|--|
|                               |                   | Min.           | Typ. | Max. |      |  |
| Temperature                   | Ta                | -40            | -    | 85   | °C   |  |
| Reset Voltage                 | V <sub>POR</sub>  |                | 1.47 |      | V    |  |
| V <sub>DD</sub> Start Voltage | V <sub>POR</sub>  |                |      | 100  | mV   | V <sub>DD</sub> Start Voltage to Ensure Power-on Reset |
| V <sub>DD</sub> Rising Rate   | RR <sub>VDD</sub> | 10             |      |      | us/V | V <sub>DD</sub> Rising Rate to Ensure Power-on Reset   |
| V <sub>DD</sub> Falling Rate  | RD <sub>VDD</sub> | 320            |      |      | us/V | V <sub>DD</sub> Falling Rate to Ensure Power-on Reset  |

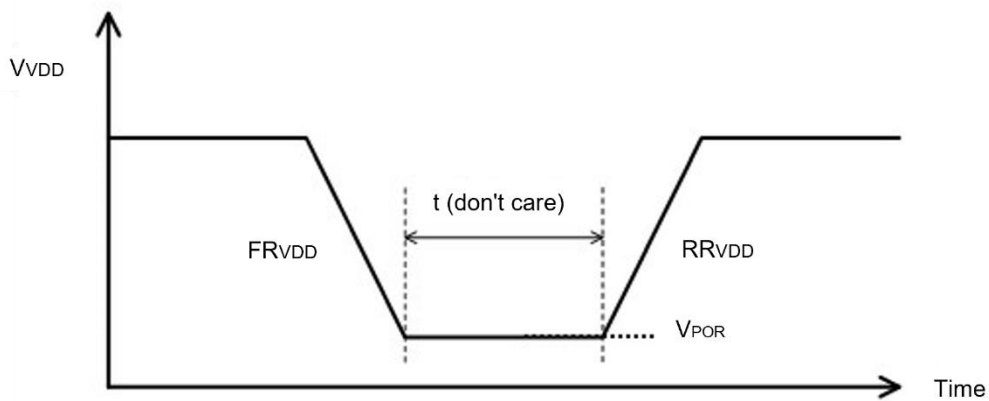


### 2.4.2. nRESET Reset (External Reset)

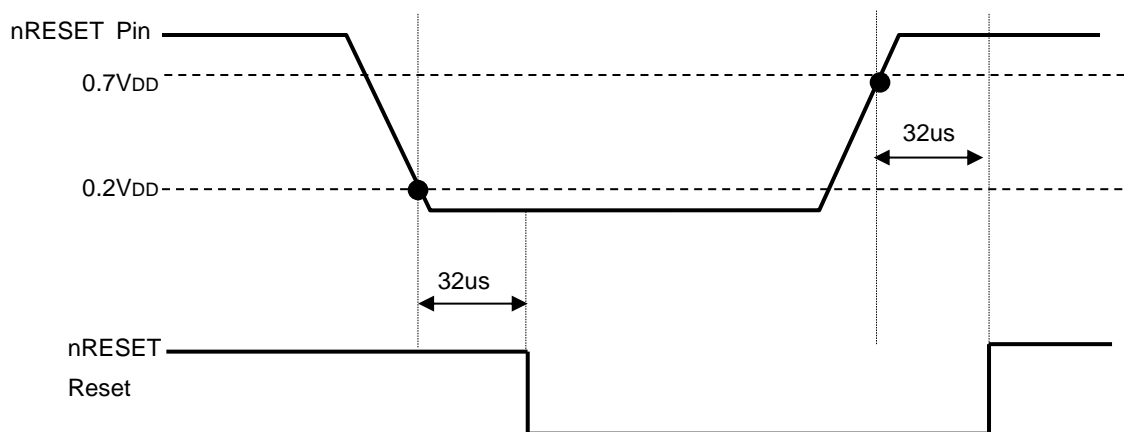


2.4.3. Low Voltage Reset

| Item                 | Symbol           | Specification |      |      | Unit | Remark                   |
|----------------------|------------------|---------------|------|------|------|--------------------------|
|                      |                  | Min.          | Typ. | Max. |      |                          |
| Temperature          | Ta               | -40           |      | 85   | °C   |                          |
| Power-supply Voltage | AV <sub>DD</sub> | 0             | -    | 3.6  | V    |                          |
| Operating Current    | I <sub>LVR</sub> |               | 0.5  |      | uA   | AV <sub>DD</sub> = 3.6 V |
| Threshold Voltage    | V <sub>LVR</sub> | 1.40          | 1.48 | 1.56 | V    | T <sub>A</sub> = 25 °C   |

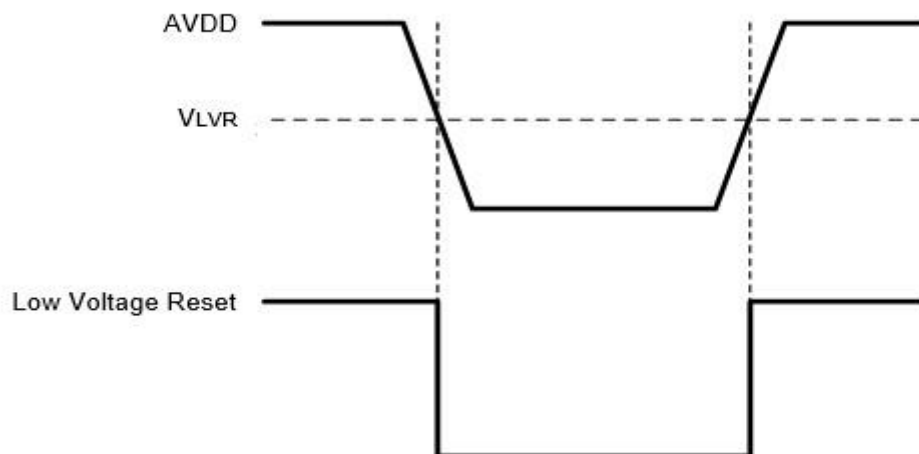


2.4.4. External Clock Timing

| Item                | Symbol                            | Specification |      |         | Unit               | Remark |
|---------------------|-----------------------------------|---------------|------|---------|--------------------|--------|
|                     |                                   | Min.          | Typ. | Max.    |                    |        |
| Input cycle         | t <sub>c</sub>                    | 62.5          |      |         | ns                 | 16MHz  |
| Clock pulse width   | t <sub>WH</sub> , t <sub>WL</sub> | 10            |      |         | ns                 |        |
| Frequency tolerance | -                                 | -0.0001       |      | +0.0001 | × 10 <sup>-6</sup> |        |

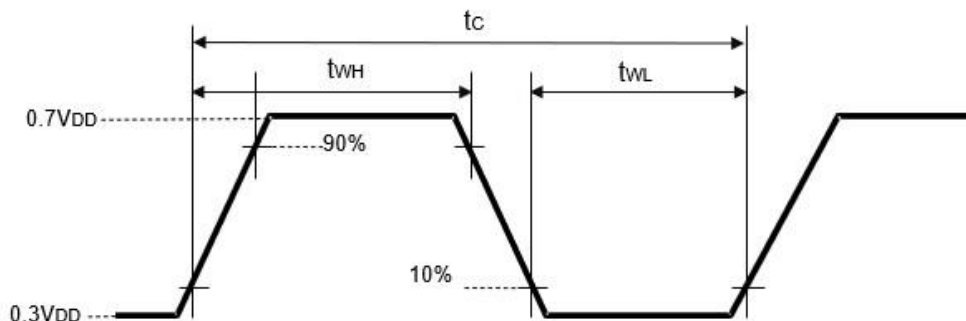


2.4.5. Clock Input Circuit


When using a ceramic resonator

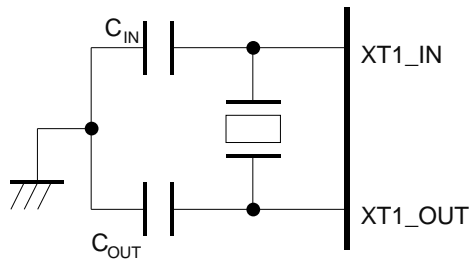

External clock input circuit

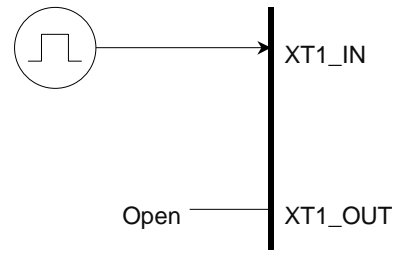

2.4.6. Input Equivalent Circuit of Reset Signal

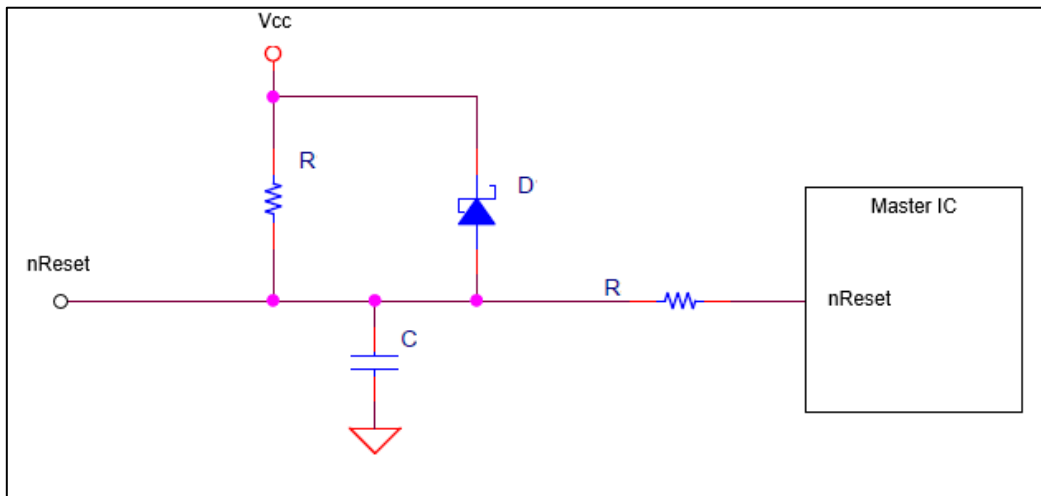

## 2.5. Connector Pin Assignment

### 2.5.1. Connector Information

| Connector Number | Model Number    | Maker  |
|------------------|-----------------|--------|
| CN1              | SM06B-SRSS-TB   | JST    |
| CN2              | SM11B-SRSS-TB   | JST    |
| CN4              | FH28-40S-0.5SH  | HIROSE |
| CN5              | FH28D-55S-0.5SH | HIROSE |

### 2.5.2. Connector Terminal

| Connector Number | Terminal Number | Terminal Name  | Description  |
|------------------|-----------------|----------------|--|
| CN1              | 1               | VBUS           | USB power input  |
|                  | 2               | D-             | USB D-   |
|                  | 3               | D+             | USB D+   |
|                  | 4               | GND            | USB GND  |
|                  | 5               | RESETn         | Reset Terminal Active Low<br>Minimum Pulse Width 1ms<br>(Connection is unnecessary. It is pulled up within the board.) |
|                  | 6               | GND            | Reset GND  |
| CN2              | 1               | ICE_CK         | Unused   |
|                  | 2               | ICE_DAT        | Unused   |
|                  | 3               | RESETn         | Reset Terminal Active Low<br>Minimum Pulse Width 1ms<br>(Connection is unnecessary. It is pulled up within the board.) |
|                  | 4               | Tx             | UART Communication<br>DUS Board to Host Computer   |
|                  | 5               | Rx             | UART Communication<br>Host Computer to DUS Board   |
|                  | 6               | SCL            | I2C  |
|                  | 7               | SDA            | I2C  |
|                  | 8               | I2C_INT / GPIO | For Interrupt signal when using I2C  |
|                  | 9               | VCC_IN         | DC Power Input   |
|                  | 10              | ICE_VCC        | Unused   |
|                  | 11              | GND            | Power GND  |
| CN4              |                 |                | Connector for touch sensor, 40 pins  |
| CN5              |                 |                | Connector for touch sensor, 55 pins  |

### **3. Precautions**

Do not boot the controller while a hand or metal is on the touch panel. It may not work properly after booted. Operation may become unstable, depending on the surrounding environment.

Do not use the controller under environments that affect capacitance values (The affecting factors are such as power-supply noises).

The application tool, TPOffset must be executed before operating DMC's touch screens of capacitive multi-touch type (EXC series and DUS series) with the DUS series controller.

TPOffset is the application software executable on Windows. It can be downloaded from the DMC's website below.

DMC's website: TPOffset download page.

<https://www.dush.co.jp/english/download/driver-app/>

### **4. Warranty**

#### **4.1. Warranty Period**

§ The warranty period is limited to 1 year from the date of shipping. The warranty for the initial deflection such as appearance deflection is limited to 1 month.

§ Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the deflection is considered to be caused by the supplier.

§ The replacement is subject to be included in the next lot.

#### **4.2. Warranty Target**

§ The warranty only covers the product itself and does not cover any damage to others caused by using this product. Onsite repair or replacement is not supported.

§ We will do our best for delivery problem and product defections, but the warranty for the production line is not covered.

#### **4.3. Warranty Exceptions**

Following conditions are not covered with the warranty and subject to charge.

§ Any malfunctions and damages during transportation and transfer by the user.

§ Any malfunctions and damages caused by a natural disaster or a fire.

§ Any malfunctions and damages caused by static electricity

§ Any malfunctions and damages caused by the failure of the associated equipment.

§ If the product is remodeled, disassembled or repaired by the user.

§ If the product is glued onto the equipment and uninstalled.

§ Any malfunctions and damages caused by an improper usage and handling against the specifications and notes.



## 5. Precautions for Use

### 5.1. General Handling

- § Keep the product away from any conductive objects while in use.
- § Do not touch the conductive part of the product to avoid being damaged by the electrostatic discharge.
  - Follow the proper procedure for handling.
- § Keep the product in the proper storing environment and avoid any load to the product.
- § Do not use or store the product in the severe condition like following:
  - Wet environment or a condition where the product is likely to get wet.
  - Where dew condensation is likely to occur.
  - Near solvent or acid.
- § Do not take apart or alter the product.

### 5.2. Others

- § The contents of this document are subject to change without notice.
- § The manufacturer or sales representatives will not be liable for any damages or loss arising from use of this product.
- § This product is intended for use in standard applications (computers, office automation, and other office equipment, industrial, communications, and measurement equipment, personal and household devices, etc.) Please avoid using this product for special applications where failure or abnormal operation may directly affect human lives, or cause physical injury or property damage, or where extremely high levels of reliability are required (such as aerospace systems, vehicle operating control, atomic energy controls, medical devices for life support, etc.).
- § Any semiconductor devices have inherently a certain rate of failure. The user must protect against injury, damage, or loss from such failures by incorporating safety design measures into the user's facility and equipment.

## 6. Version History

Ver1.0 (February 7, 2020)  
First release

Ver2.0 (June 3, 2020)  
Specification for UART interface is added.

Ver3.0 (April 16, 2021)  
2.1 Touch Screen Board Specification Added note on Host Interface  
Revised operating temperature and storage temperature ranges.  
Revised coordinate accuracy specification values  
2.3.2. DC Characteristics Added max values.  
2.5.2. Connector Terminal  
CN1: RESETn Added "(Connection is unnecessary. It is pulled up within the board.)".  
CN2: RESETn Added "(Connection is unnecessary. It is pulled up within the board.)".  
Tx/Rx Deleted "(5V TTL Level)".  
3. Precautions Added a sentence  
Dimensional Drawing Added components on backside of the board.

Ver4.0 (January 12, 2022)  
Specification for I2C interface is added.

Ver5.0 (June 28, 2022)  
Timing Requirements is added.

Ver6.0 (March 01, 2023)

- 2.1. Touch Screen Board Specification: Corrected the units of Main IC ( [pcs] ⇒ [pc] )
- 2.3.1. Maximum Absolute Rating: Changed the notation of Touch Panel Power Supply to Supply Voltage.
- 2.3.2. DC Characteristics: Changed the notation of Touch Panel Power Supply to Supply Voltage.
- 2.3.3. USB Signal (D+, D-) DC Characteristics: Value correction.
  - Input High Voltage Max. 3.6 ⇒ 3.3
  - Input Low Voltage Min. – ⇒ 0
- 2.3.4. UART Signal (Rx, Tx) DC Characteristics: Value correction.
  - Input High Voltage Max. 3.6 ⇒ 3.3
  - Input Low Voltage Min. – ⇒ 0
  - Output High Voltage Max. 3.6 ⇒ 3.3
  - Output Low Voltage Min. – ⇒ 0
- 2.3.5. I2C (SCL, SDA, I2C\_INT) DC Characteristics: Value correction.
  - Input High Voltage Max. 3.6 ⇒ 3.3
  - Input Low Voltage Min. – ⇒ 0
  - Output Low Voltage Min. – ⇒ 0
- 2.3.6. RESETn Signal DC Characteristics: Value correction
  - Input High Voltage Max. 3.6 ⇒ 3.3
  - Input Low Voltage Min. – ⇒ 0
- 3. Precautions: Changed URL of TPOffset download page due to change of the website
- 4. Version History: Renamed “Change History” to “Version History” for format unification.  
Changed DMC logo and website URL due to the merger.


DUS2200A Product Specification  
Ver6.0 issued on March 01, 2024  
©2024 DMC Co., Ltd.

This document can be freely distributed, but any alternation to this document is prohibited.



DMC Co., Ltd.  
<https://www.dush.co.jp/english/>

11F Takanawa Sengakuji Ekimae Bldg., 2-18-10 Takanawa, Minato-ku, Tokyo 108-0074, Japan  
Phone: +81-3-6721-6731 (Japanese), 6736 (English) Fax: +81-3-6721-6732

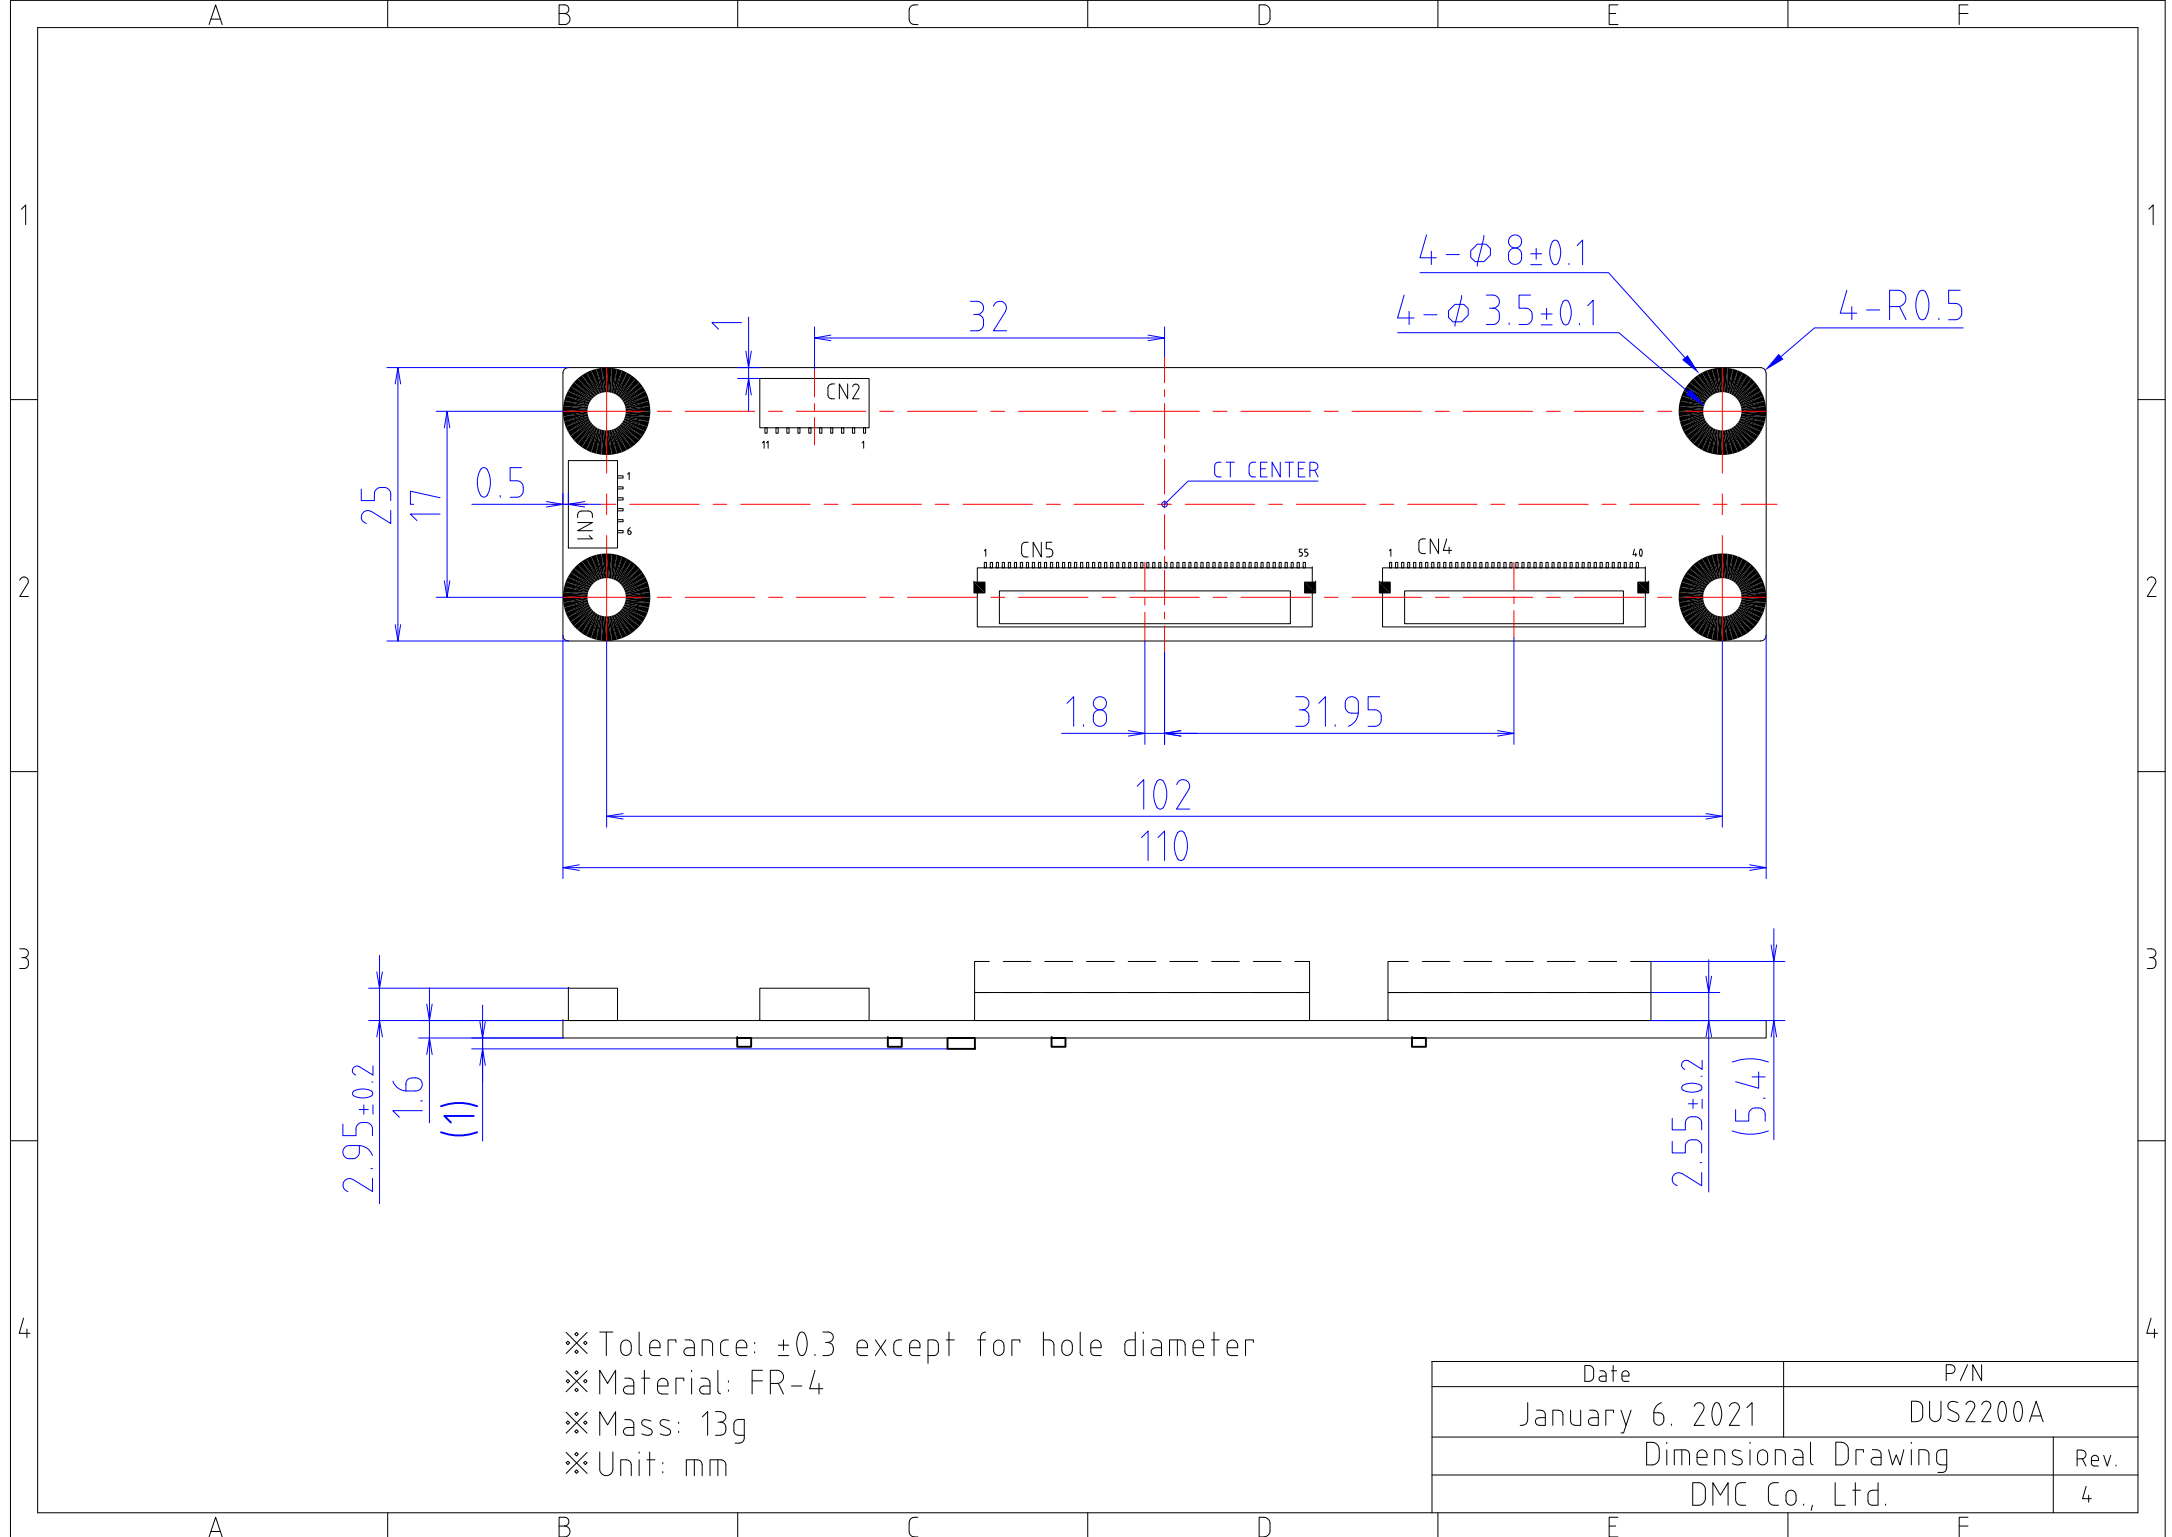

※Tolerance:  $\pm 0.3$  except for hole diameter  
 ※Material: FR-4  
 ※Mass: 13g  
 ※Unit: mm

|                     |          |
|---------------------|----------|
| Date                | P/N      |
| January 6, 2021     | DUS2200A |
| Dimensional Drawing |          |
| DMC Co., Ltd.       |          |
| Rev.                | 4        |



# Appearance inspection standard ( 1 )


## 1.1 Inspection condition

Inspection Distance :  $35 \pm 5$  cm

View Angle : Inspection under non-operating condition :  $\pm 30^\circ$

Ambient Illumination : 500~2000 lux

Inspection time : 3~5 seconds

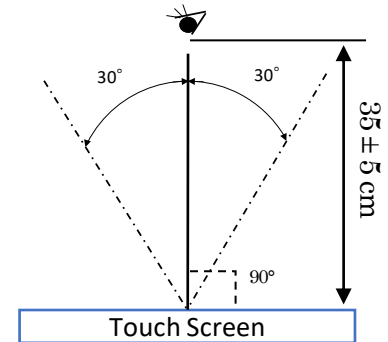

## 1.2 Scratch, dust (W = width, L = length, D = average diameter = (longest + shortest) / 2))

Total defects on each panel.

【 14 inches < Size  $\leq$  22 inches 】 Within 10 pcs / panel

【 < Size  $\leq$  14 inches 】 Within 7 pcs / panel

| Item  | Width(mm)           | Length(mm)  | Acceptable Numbers    |
|---|---------------------|-------------|-----------------------|
| <b>Linear</b><br>(Foreign substance/scratch/<br>transparent defects) *1<br>Defects over 0.2mm in<br>diameter will be judged in<br>circular. | $0.15 < W \leq 0.2$ | $L \leq 10$ | Up to 4pc per product |
|   | $0.1 < W \leq 0.15$ | $L \leq 20$ | Up to 6pc per product |
|   | $W \leq 0.1$        | Acceptable  | Acceptable            |
| <b>Circular</b><br>(Foreign substance/scratch/<br>transparent defects) *1   | $0.5 < D \leq 0.7$  |             | Up to 1pc per product |
|   | $0.3 < D \leq 0.5$  |             | Up to 6pc per product |
|   | $D \leq 0.3$        |             | Acceptable            |

\*1 Transparent defects mean, e.g. bubble , lint etc...

(Lint is the defect that is different transparent from other part due to the elevating surface by printing over foreign substance.)




- Stains are acceptable as long as they are not clearly outlined and are not noticeable.
- Applied only in the Viewing Area.

Scratches or dusts in the outside of the Viewing Area are acceptable unless the electrical characteristics are affected.

|         |  |              |                 |
|---------|--|--------------|-----------------|
| Product | LCD Modules with Capacitive Glass Sensor Touchscreen | Document No. | 22G4GX-00002E-0 |
|---------|--|--------------|-----------------|

## Appearance inspection standard ( 2 )

### 1.3 Chip( cover glass , touch panel) (t = Glass thickness)
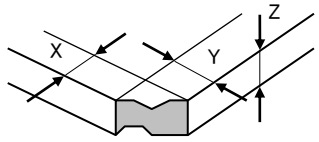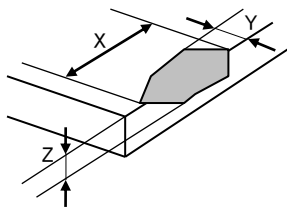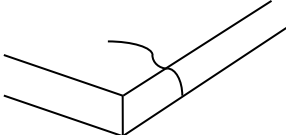
| Item                  | Size(mm)  |   | Acceptable Numbers    |
|-----------------------|---|---|-----------------------|
| Corner                |    | X | $1.0 \leq X \leq 2.0$ |
|                       |   | Y | $1.0 \leq Y \leq 2.0$ |
|                       |   | Z | $\leq t$              |
| Other than at corners |    | X | $\leq 5.0$            |
|                       |   | Y | $1.0 \leq Y \leq 2.0$ |
|                       |   | Z | $\leq t/2$            |
| Progressive Crack     |  |   | Not acceptable        |

### 1.4 Appearance criteria for color-printed area of covering glass (judged from surface view)

| Item   | Defect contents   | Acceptable range   |                           |
|--|---|--|---------------------------|
| Color Peeling  | Color print coming off  | Unacceptable   |                           |
| Color Lacking  | Color print partly missing  | Unacceptable   |                           |
| Color Running  | Ink bleed   | The defect should not be over edge face  |                           |
| Scratch  | Scratch on color-printed part   | Base glass should not be exposed   |                           |
| Color Unevenness   | Color thickness is uneven   | Should be no color unevenness that can be easily detected.<br>(should not be detectable by gaze for 4 - 6 seconds) |                           |
| Pinhole through to the base glass, Adhering foreign substance which is different color from the printing | a : $0.2 \text{ mm} < D \leq 0.3 \text{ mm}$<br>b : $D \leq 0.2 \text{ mm}$ | Acceptable quantity  | Total acceptable quantity |
|  |   | a : 2pcs in $\phi 30 \text{ mm}$<br>b : Acceptable   | Up to 5pc per product     |
| Tilt/Misalignment  | —   | Should be within tolerances indicated by the drawing   |                           |

|         |  |              |                 |
|---------|--|--------------|-----------------|
| Product | LCD Modules with Capacitive Glass Sensor Touchscreen | Document No. | 22G4GX-00002E-0 |
|---------|--|--------------|-----------------|