



CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	NC
2	Y22	2	Dummy
3	Y21	3	X36
4	Y20	4	X35
5	Y19	5	X34
6	Y18	6	X33
7	Y17	7	X32
8	Y16	8	X31
9	Y15	9	X30
10	Y14	10	X29
11	Y13	11	X28
12	Y12	12	X27
13	Y11	13	X26
14	Y10	14	X25
15	Y09	15	X24
16	Y08	16	X23
17	Y07	17	X22
18	Y06	18	X21
19	Y05	19	X20
20	Y04	20	X19
21	Y03	21	X18
22	Y02	22	X17
23	Y01	23	X16
24	Y00	24	X15
25	Dummy	25	X14
26	NC	26	X13
		27	X12
		28	X11
		29	X10
		30	X09
		31	X08
		32	X07
		33	X06
		34	X05
		35	X04
		36	X03
		37	X02
		38	X01
		39	X00
		40	Dummy

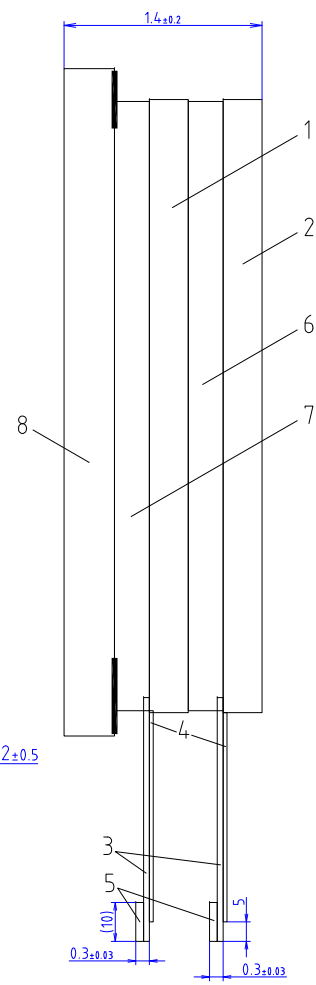

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	Ag	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
		mm
○TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1	TOP ITO FILM	t=0.1mm
2	BOTTOM ITO FILM	t=0.1mm
3	FPC	POLYIMIDE 12.5μm <small>Electrolytic copper foil GLONC</small>
4	REINFORCEMENT FILM	POLYIMIDE 25μm
5	STIFFENER	POLYIMIDE 225μm
6	ADHESIVE SHEET	OCA 50μm
7	ADHESIVE SHEET A	OCA 50μm
8	COVER GLASS	t=1.1mm Clear/Chemical strengthening Black printing



TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

PART No.	DATE
DUS-F101WA060A1A	Jan/25/2021
TYPE	DMC Co., Ltd.
Projected Capacitive	
DIMENSIONAL DRAWING	