
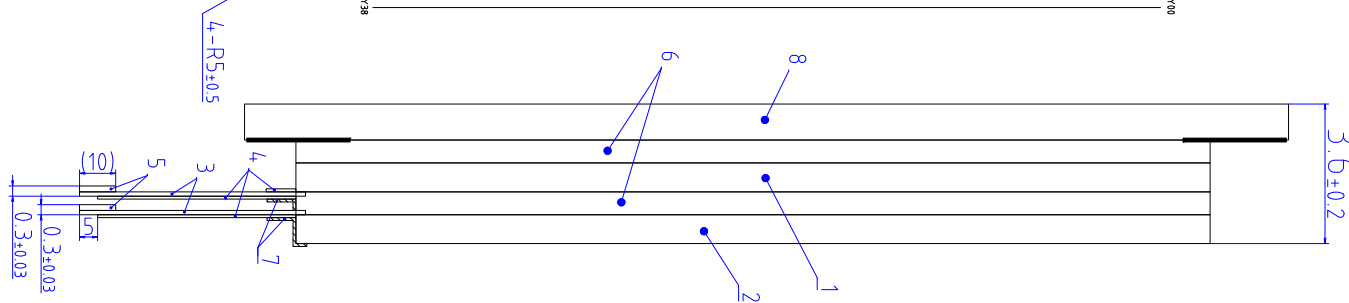


456.9±0.3 (Cover glass)  
429±0.5 (Touch panel)  
409.8 (Active area)

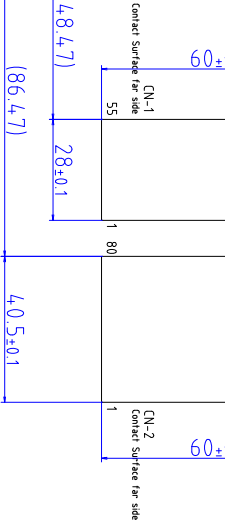

Item No.	Remarks
1	Dummy
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC

Item No.	Remarks
1	Dummy
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC

ITEM	MATERIAL	REMARKS
1	TOP ITO GLASS	
2	BOTTOM ITO GLASS	
3	FPC	
4	REINFORCEMENT FILM	
5	STIFFENER	
6	ADHESIVE SHEET	
7	PROTECTION TAPE	
8	COVER GLASS	

REMARKS	UNIT
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	0.2-0.5mm
CIRCUIT PATTERN WIDTH	0.1-0.2mm
OTOLERANCE	±0.3mm

TOLERANCE=±0.3mm  
EXCEPT WHERE INDICATED  
UNIT=mm  
Edges and corners of ITO glass may be chamfered  
without affecting product specification.

PART No.	DATE
DUS-LA185WB060A1A	Aug/5/2022
TYPE	
Projected Capacitive	
DIMENSIONAL DRAWING	
	DMC Co., Ltd.