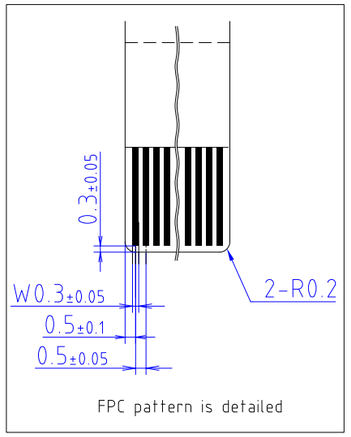

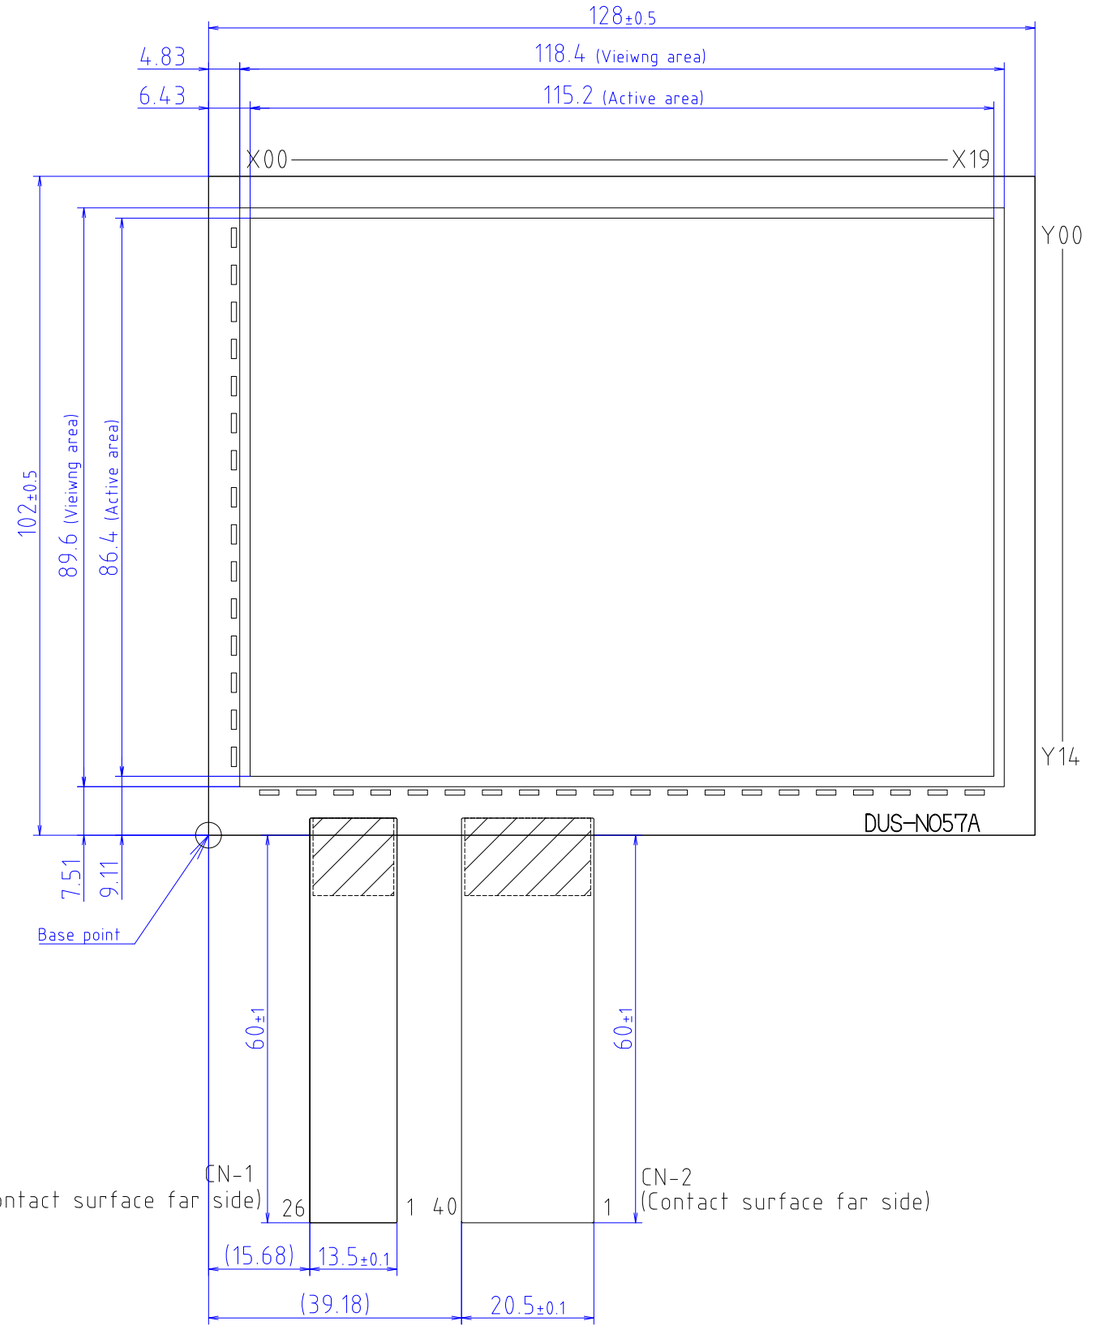

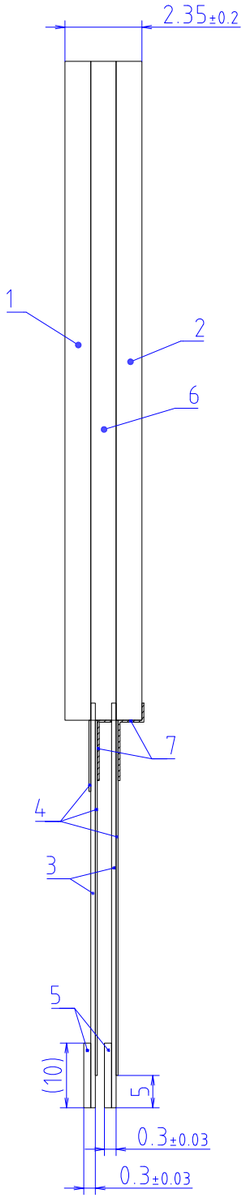

CN-1 PinOut

1	—	Dummy
2	—	Y14
3	—	Y13
4	—	Y12
5	—	Y11
6	—	Y10
7	—	Y09
8	—	Y08
9	—	Y07
10	—	Y06
11	—	Y05
12	—	Y04
13	—	Y03
14	—	Y02
15	—	Y01
16	—	Y00
17	—	Dummy
18	—	NC
19	—	NC
20	—	NC
21	—	NC
22	—	NC
23	—	NC
24	—	NC
25	—	NC
26	—	NC

CN-2 PinOut

1	—	NC
2	—	NC
3	—	NC
4	—	NC
5	—	NC
6	—	NC
7	—	NC
8	—	NC
9	—	NC
10	—	NC
11	—	NC
12	—	NC
13	—	NC
14	—	NC
15	—	NC
16	—	NC
17	—	NC
18	—	NC
19	—	Dummy
20	—	X19
21	—	X18
22	—	X17
23	—	X16
24	—	X15
25	—	X14
26	—	X13
27	—	X12
28	—	X11
29	—	X10
30	—	X09
31	—	X08
32	—	X07
33	—	X06
34	—	X05
35	—	X04
36	—	X03
37	—	X02
38	—	X01
39	—	X00
40	—	Dummy

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
○ELECTRODE PITCH : X=5.75m、 Y=5.74m		
○TOLERANCE=±0.3mm		

	ITEM	MATERIAL		REMARKS
1	TOP ITO GLASS	t=1.1mm		
2	BOTTOM ITO GLASS	t=1.1mm		
3	FPC	POLYIMIDE	12.5μm	CONTACT:GILDING
4	REINFORCEMENT FILM	POLYIMIDE	25μm	
5	STIFFENER	POLYIMIDE	225μm	
6	ADHESIVE SHEET		150μm	
7	PROTECTION TAPE	POLYESTER	25μm	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N057A060C	Jun/10/26	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm