

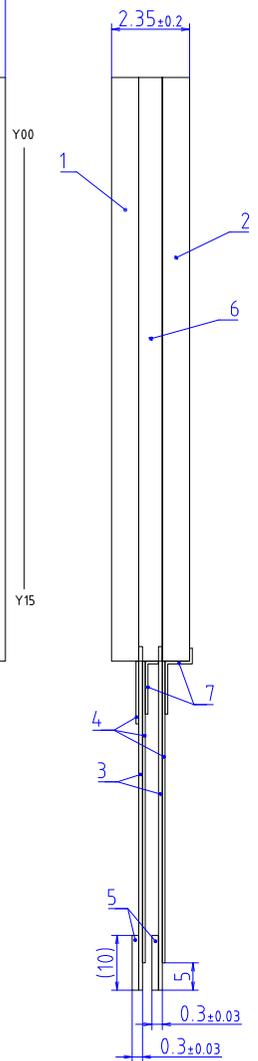


A B C D E F

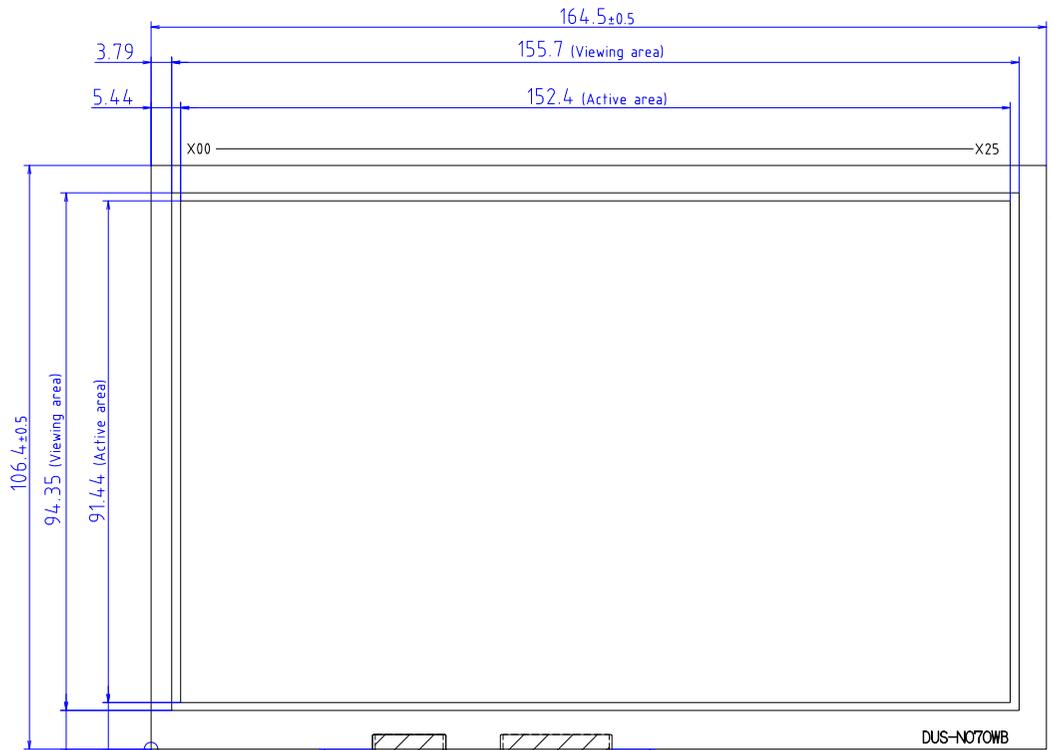


CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	NC
2	Y15	2	NC
3	Y14	3	NC
4	Y13	4	NC
5	Y12	5	NC
6	Y11	6	NC
7	Y10	7	NC
8	Y09	8	NC
9	Y08	9	NC
10	Y07	10	NC
11	Y06	11	NC
12	Y05	12	NC
13	Y04	13	Dummy
14	Y03	14	X25
15	Y02	15	X24
16	Y01	16	X23
17	Y00	17	X22
18	Dummy	18	X21
19	NC	19	X20
20	NC	20	X19
21	NC	21	X18
22	NC	22	X17
23	NC	23	X16
24	NC	24	X15
25	NC	25	X14
26	NC	26	X13
		27	X12
		28	X11
		29	X10
		30	X09
		31	X08
		32	X07
		33	X06
		34	X05
		35	X04
		36	X03
		37	X02
		38	X01
		39	X00
		40	Dummy

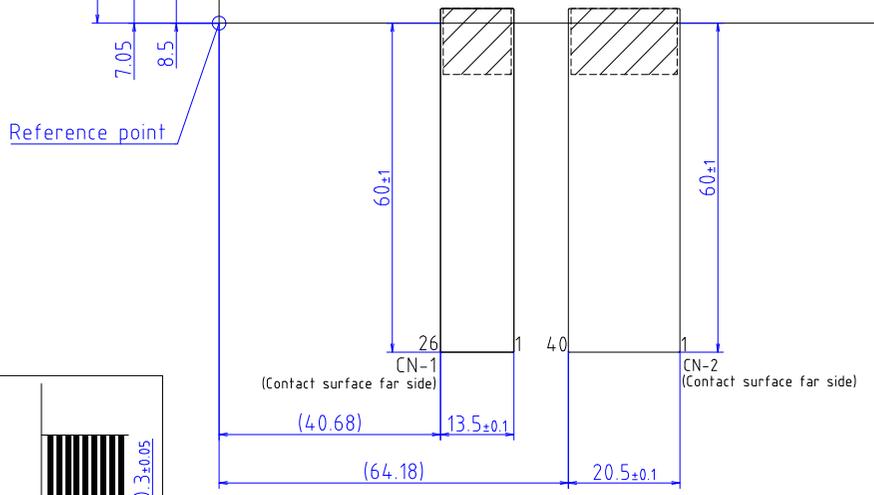

REMARKS		
FPC PATTERN PITCH	Cu	0.5mm
FPC PATTERN WIDTH	-	0.2-0.3mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
O ELECTRODE PITCH: X=5.86mm, Y=5.7mm		
O TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1	TOP ITO GLASS	t=1.1mm
2	BOTTOM ITO GLASS	t=1.1mm
3	FPC	POLYIMIDE 12.5μm CONTACT-GILDING
4	REINFORCEMENT FILM	POLYIMIDE 25μm
5	STIFFENER	POLYIMIDE 225μm
6	ADHESIVE SHEET	150μm
7	PROTECTION TAPE	POLYESTER 25μm

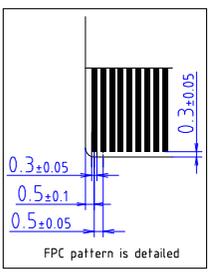

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N070WB060C	Jul/16/25	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN		mm
DIMENSIONAL DRAWING	DMC Co., Ltd.	

A B C D E F