


CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	Dummy
2	Y20	2	X37
3	Y19	3	X36
4	Y18	4	X35
5	Y17	5	X34
6	Y16	6	X33
7	Y15	7	X32
8	Y14	8	X31
9	Y13	9	X30
10	Y12	10	X29
11	Y11	11	X28
12	Y10	12	X27
13	Y09	13	X26
14	Y08	14	X25
15	Y07	15	X24
16	Y06	16	X23
17	Y05	17	X22
18	Y04	18	X21
19	Y03	19	X20
20	Y02	20	X19
21	Y01	21	X18
22	Y00	22	X17
23	Dummy	23	X16
24	NC	24	X15
25	NC	25	X14
26	NC	26	X13
27		27	X12
28		28	X11
29		29	X10
30		30	X09
31		31	X08
32		32	X07
33		33	X06
34		34	X05
35		35	X04
36		36	X03
37		37	X02
38		38	X01
39		39	X00
40		40	Dummy

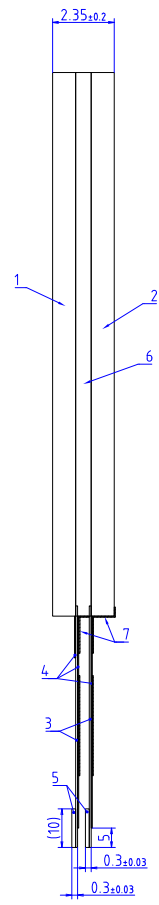

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
		mm
CIRCUIT PATTERN WIDTH	Ag	0.03mm
		mm
O TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=1.1mm	
2 BOTTOM ITO GLASS	t=1.1mm	
3 FPC	POLYIMIDE 12.5μm	Electrolytic copper foil GLOWE
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	150μm	
7 PROTECTION TAPE	POLYESTER 25μm	

PART No.		DATE	
DUS-N101WA060A/WS		JAN/27/23	
TYPE			
Projected Capacitive		DMC Co., Ltd.	
DIMENSIONAL DRAWING			

TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

