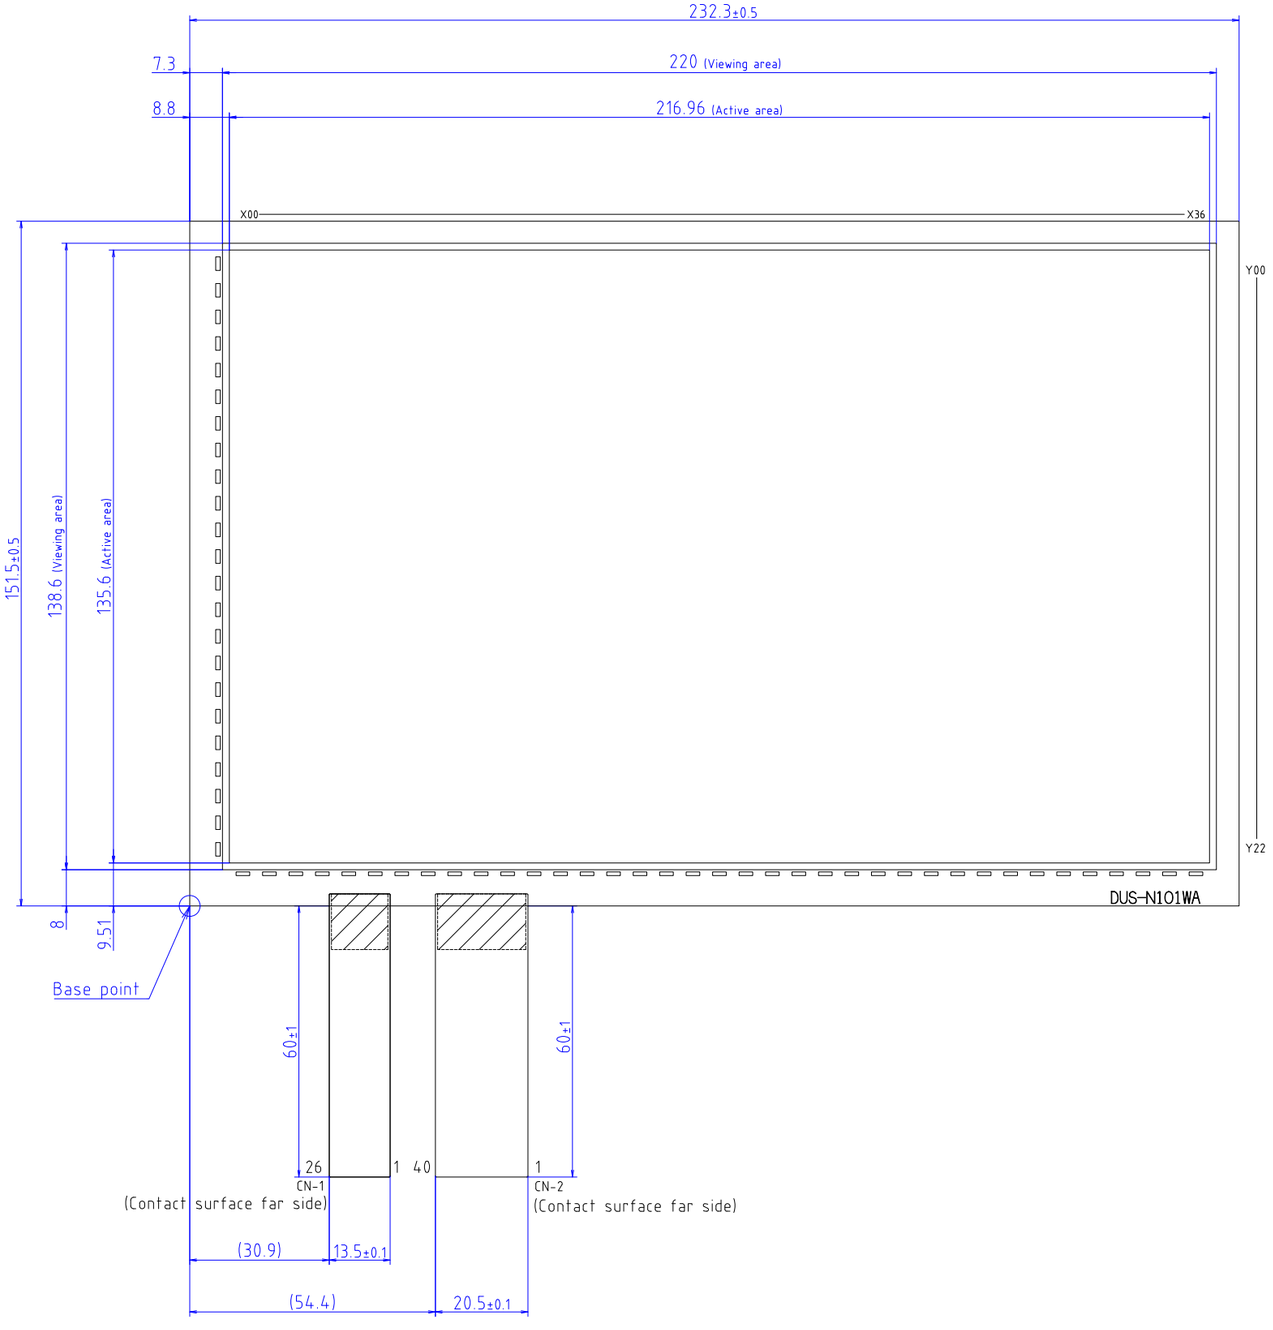

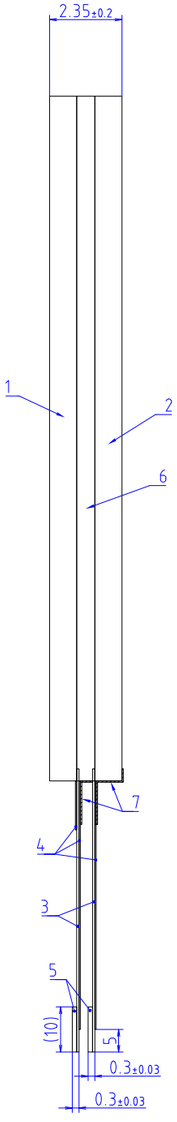

CN-1 PinOut

1	—	Dummy
2	—	Y22
3	—	Y21
4	—	Y20
5	—	Y19
6	—	Y18
7	—	Y17
8	—	Y16
9	—	Y15
10	—	Y14
11	—	Y13
12	—	Y12
13	—	Y11
14	—	Y10
15	—	Y09
16	—	Y08
17	—	Y07
18	—	Y06
19	—	Y05
20	—	Y04
21	—	Y03
22	—	Y02
23	—	Y01
24	—	Y00
25	—	Dummy
26	—	NC

CN-2 PinOut

1	—	NC
2	—	Dummy
3	—	X36
4	—	X35
5	—	X34
6	—	X33
7	—	X32
8	—	X31
9	—	X30
10	—	X29
11	—	X28
12	—	X27
13	—	X26
14	—	X25
15	—	X24
16	—	X23
17	—	X22
18	—	X21
19	—	X20
20	—	X19
21	—	X18
22	—	X17
23	—	X16
24	—	X15
25	—	X14
26	—	X13
27	—	X12
28	—	X11
29	—	X10
30	—	X09
31	—	X08
32	—	X07
33	—	X06
34	—	X05
35	—	X04
36	—	X03
37	—	X02
38	—	X01
39	—	X00
40	—	Dummy



REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
○ELECTRODE PITCH: X=5.86mm、Y=5.89mm		
○TOLERANCE=±0.3mm		

	ITEM	MATERIAL		REMARKS
1	TOP ITO GLASS	t=1.1mm		
2	BOTTOM ITO GLASS	t=1.1mm		
3	FPC	POLYIMIDE	12.5μm	CONTACT:GILDING
4	REINFORCEMENT FILM	POLYIMIDE	25μm	
5	STIFFENER	POLYIMIDE	225μm	
6	ADHESIVE SHEET		150μm	
7	PROTECTION TAPE	POLYESTER	25μm	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N101WA060C	Jun/15/26	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm