



CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	Dummy
2	Y20	2	X37
3	Y19	3	X36
4	Y18	4	X35
5	Y17	5	X34
6	Y16	6	X33
7	Y15	7	X32
8	Y14	8	X31
9	Y13	9	X30
10	Y12	10	X29
11	Y11	11	X28
12	Y10	12	X27
13	Y09	13	X26
14	Y08	14	X25
15	Y07	15	X24
16	Y06	16	X23
17	Y05	17	X22
18	Y04	18	X21
19	Y03	19	X20
20	Y02	20	X19
21	Y01	21	X18
22	Y00	22	X17
23	Dummy	23	X16
24	NC	24	X15
25	NC	25	X14
26	NC	26	X13
		27	X12
		28	X11
		29	X10
		30	X09
		31	X08
		32	X07
		33	X06
		34	X05
		35	X04
		36	X03
		37	X02
		38	X01
		39	X00
		40	Dummy

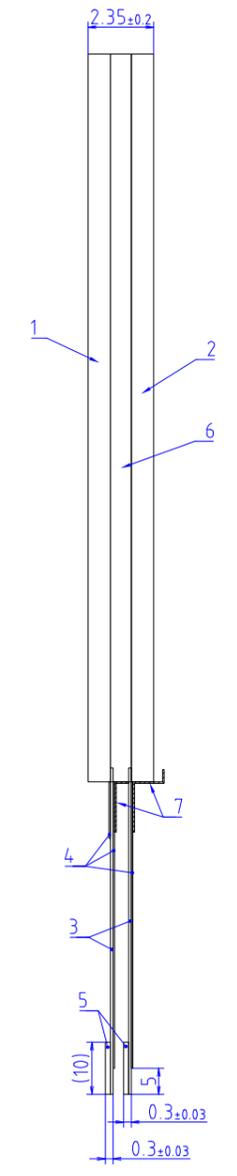

REMARKS	
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	Cu 0.2-0.3mm
	mm
CIRCUIT PATTERN WIDTH	Ag mm
	0.03mm
O ELECTRODE PITCH: X=5.86mm, Y=5.96mm	
O TOLERANCE=±0.3mm	

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=1.1mm	
2 BOTTOM ITO GLASS	t=1.1mm	
3 FPC	POLYIMIDE 12.5μm	CONTACT-GILDING
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	150μm	
7 PROTECTION TAPE	POLYESTER 25μm	



§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N101WB060C-WS	Oct/22/25	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN		mm
DIMENSIONAL DRAWING	DMC Co., Ltd.	