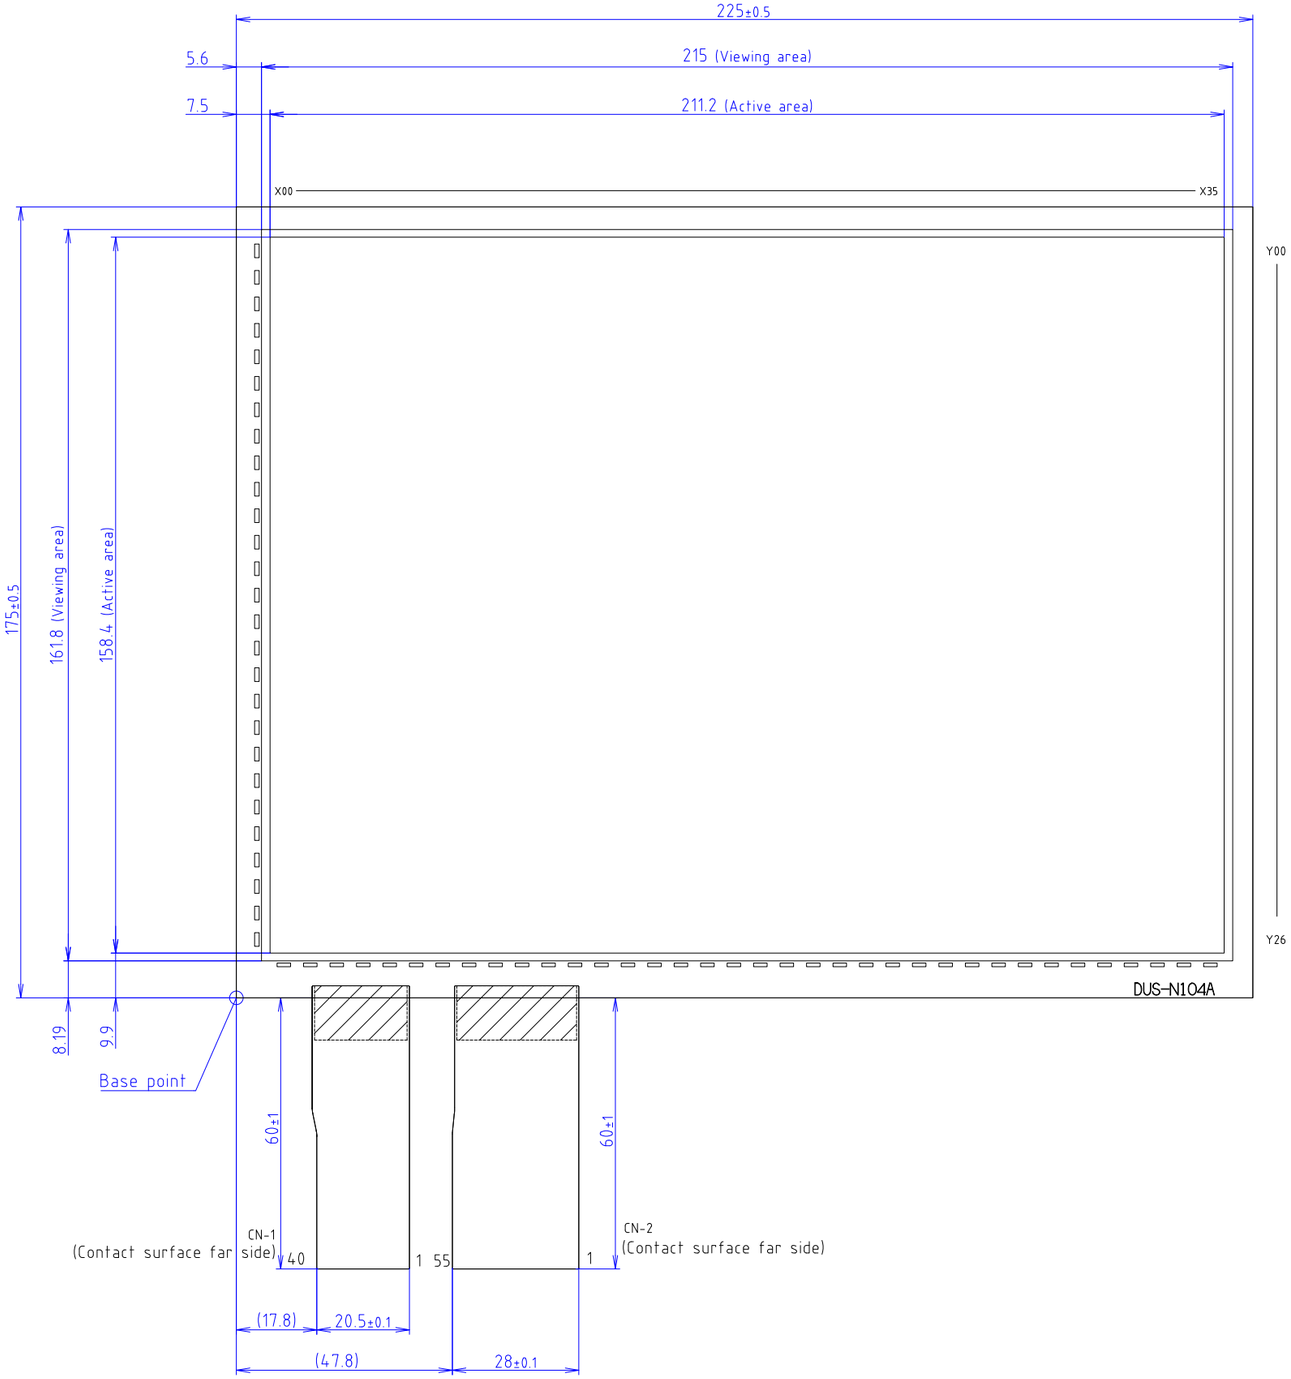

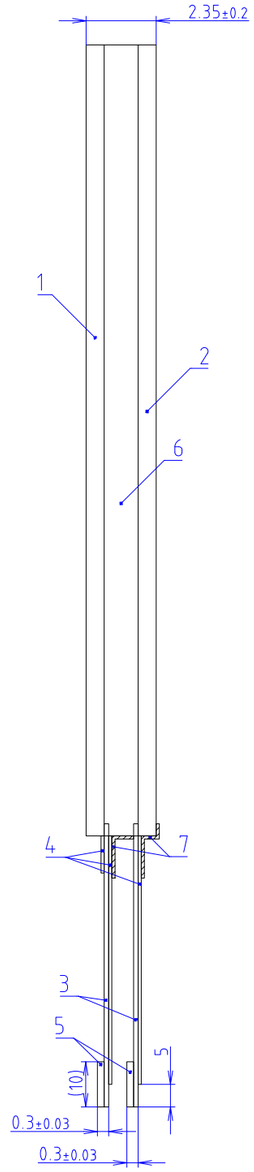

CN-1 PinOut

1	Dummy	11	Y17	21	Y07
2	Y26	12	Y16	22	Y06
3	Y25	13	Y15	23	Y05
4	Y24	14	Y14	24	Y04
5	Y23	15	Y13	25	Y03
6	Y22	16	Y12	26	Y02
7	Y21	17	Y11	27	Y01
8	Y20	18	Y10	28	Y00
9	Y19	19	Y09	29	Dummy
10	Y18	20	Y08	30	NC
31	NC	32	NC	33	NC
34	NC	35	NC	36	NC
37	NC	38	NC	39	NC
40	NC				

CN-2 PinOut

1	NC	11	NC	21	X32
2	NC	12	NC	22	X31
3	NC	13	NC	23	X30
4	NC	14	NC	24	X29
5	NC	15	NC	25	X28
6	NC	16	NC	26	X27
7	NC	17	Dummy	27	X26
8	NC	18	X35	28	X25
9	NC	19	X34	29	X24
10	NC	20	X33	30	X23
31	X22	32	X21	33	X20
34	X19	35	X18	36	X17
37	X16	38	X15	39	X14
40	X13	41	X12	42	X11
43	X10	44	X09	45	X08
46	X07	47	X06	48	X05
49	X04	50	X03	51	X02
52	X01	53	X00	54	Dummy
55	NC				



FPC pattern is detailed

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
○ELECTRODE PITCH: X=5.86mm、Y=5.86mm		
○TOLERANCE=±0.3mm		

	ITEM	MATERIAL		REMARKS
1	TOP ITO GLASS	t=1.1mm		
2	BOTTOM ITO GLASS	t=1.1mm		
3	FPC	POLYIMIDE	12.5μm	CONTACT:GILDING
4	REINFORCEMENT FILM	POLYIMIDE	25μm	
5	STIFFENER	POLYIMIDE	225μm	
6	ADHESIVE SHEET		150μm	
7	PROTECTION TAPE	POLYESTER	25μm	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N104A060C	Jun/10/26	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm