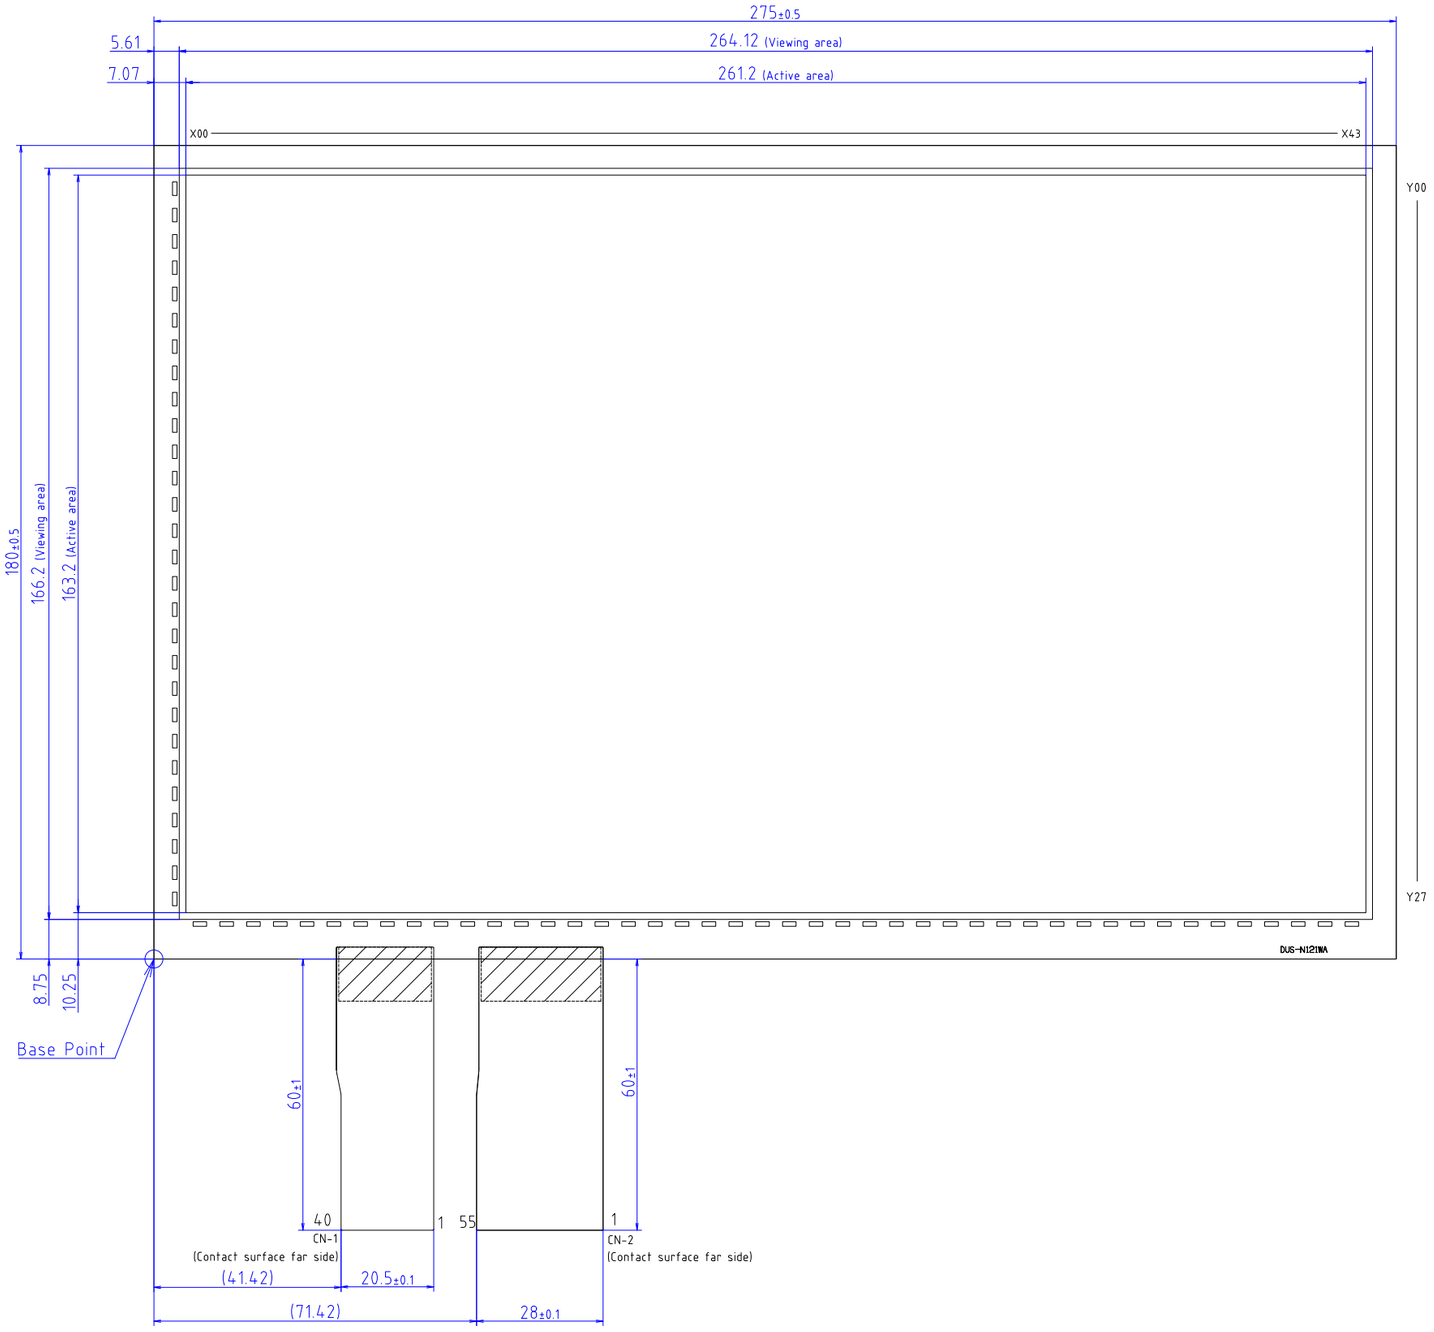

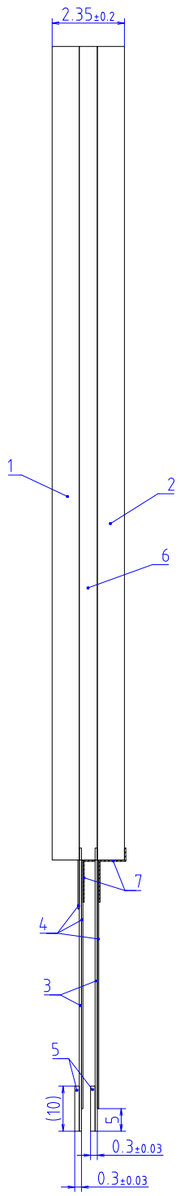

CN-1 PinOut

1	Dummy	21	Y08	41	NC
2	Y27	22	Y07	42	NC
3	Y26	23	Y06	43	NC
4	Y25	24	Y05	44	NC
5	Y24	25	Y04	45	NC
6	Y23	26	Y03	46	NC
7	Y22	27	Y02	47	NC
8	Y21	28	Y01	48	NC
9	Y20	29	Y00	49	NC
10	Y19	30	Dummy	50	NC
11	Y18	31	NC	51	NC
12	Y17	32	NC	52	NC
13	Y16	33	NC	53	NC
14	Y15	34	NC	54	NC
15	Y14	35	NC	55	NC
16	Y13	36	NC		
17	Y12	37	NC		
18	Y11	38	NC		
19	Y10	39	NC		
20	Y09	40	NC		

CN-2 PinOut

1	NC	21	X32	41	X12
2	NC	22	X31	42	X11
3	NC	23	X30	43	X10
4	NC	24	X29	44	X09
5	NC	25	X28	45	X08
6	NC	26	X27	46	X07
7	NC	27	X26	47	X06
8	NC	28	X25	48	X05
9	Dummy	29	X24	49	X04
10	X43	30	X23	50	X03
11	X42	31	X22	51	X02
12	X41	32	X21	52	X01
13	X40	33	X20	53	X00
14	X39	34	X19	54	Dummy
15	X38	35	X18	55	NC
16	X37	36	X17		
17	X36	37	X16		
18	X35	38	X15		
19	X34	39	X14		
20	X33	40	X13		



REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
○ELECTRODE PITCH: X=5.93mm、Y=5.82mm		
○TOLERANCE=±0.3mm		

	ITEM	MATERIAL		REMARKS
1	TOP ITO GLASS	t=1.1mm		
2	BOTTOM ITO GLASS	t=1.1mm		
3	FPC	POLYIMIDE	12.5μm	CONTACT:GILDING
4	REINFORCEMENT FILM	POLYIMIDE	25μm	
5	STIFFENER	POLYIMIDE	225μm	
6	ADHESIVE SHEET		150μm	
7	PROTECTION TAPE	POLYESTER	25μm	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N121WA060C	Jun/10/26	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm