

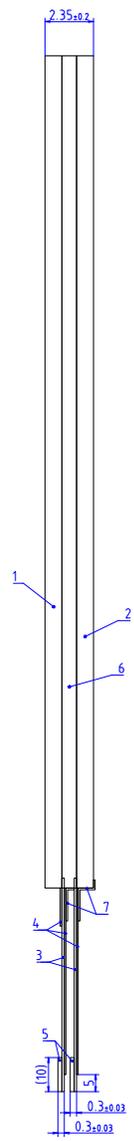


CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	NC
2	Y35	2	NC
3	Y34	3	NC
4	Y33	4	NC
5	Y32	5	NC
6	Y31	6	Dummy
7	Y30	7	X46
8	Y29	8	X45
9	Y28	9	X44
10	Y27	10	X43
11	Y26	11	X42
12	Y25	12	X41
13	Y24	13	X40
14	Y23	14	X39
15	Y22	15	X38
16	Y21	16	X37
17	Y20	17	X36
18	Y19	18	X35
19	Y18	19	X34
20	Y17	20	X33
21	Y16	21	X32
22	Y15	22	X31
23	Y14	23	X30
24	Y13	24	X29
25	Y12	25	X28
26	Y11	26	X27
27	Y10	27	X26
28	Y09	28	X25
29	Y08	29	X24
30	Y07	30	X23
31	Y06	31	X22
32	Y05	32	X21
33	Y04	33	X20
34	Y03	34	X19
35	Y02	35	X18
36	Y01	36	X17
37	Y00	37	X16
38	Dummy	38	X15
39	NC	39	X14
40	NC	40	X13
41		41	X12
42		42	X11
43		43	X10
44		44	X09
45		45	X08
46		46	X07
47		47	X06
48		48	X05
49		49	X04
50		50	X03
51		51	X02
52		52	X01
53		53	X00
54		54	Dummy
55		55	NC

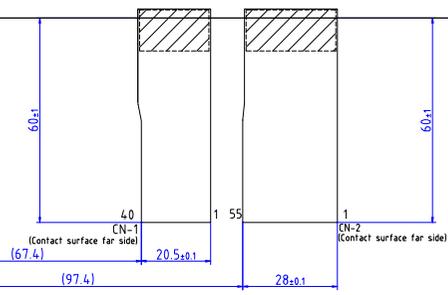

REMARKS	
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	Cu 0.2-0.3mm
	mm
CIRCUIT PATTERN WIDTH	Ag mm
	0.03mm
OELECTRODE PITCH: X=6.47mm, Y=6.33mm	
O TOLERANCE=±0.3mm	

ITEM	MATERIAL	REMARKS
1	TOP ITO GLASS	t=1.1mm
2	BOTTOM ITO GLASS	t=1.1mm
3	FPC	POLYIMIDE 12.5μm CONTACT-GILDING
4	REINFORCEMENT FILM	POLYIMIDE 25μm
5	STIFFENER	POLYIMIDE 225μm
6	ADHESIVE SHEET	150μm
7	PROTECTION TAPE	POLYESTER 25μm



§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N150B060C	Jul/16/25	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN		mm
DIMENSIONAL DRAWING	DMC Co., Ltd.	