

A

B

C

D

E

F

1

2

3



4

1

2

3

4

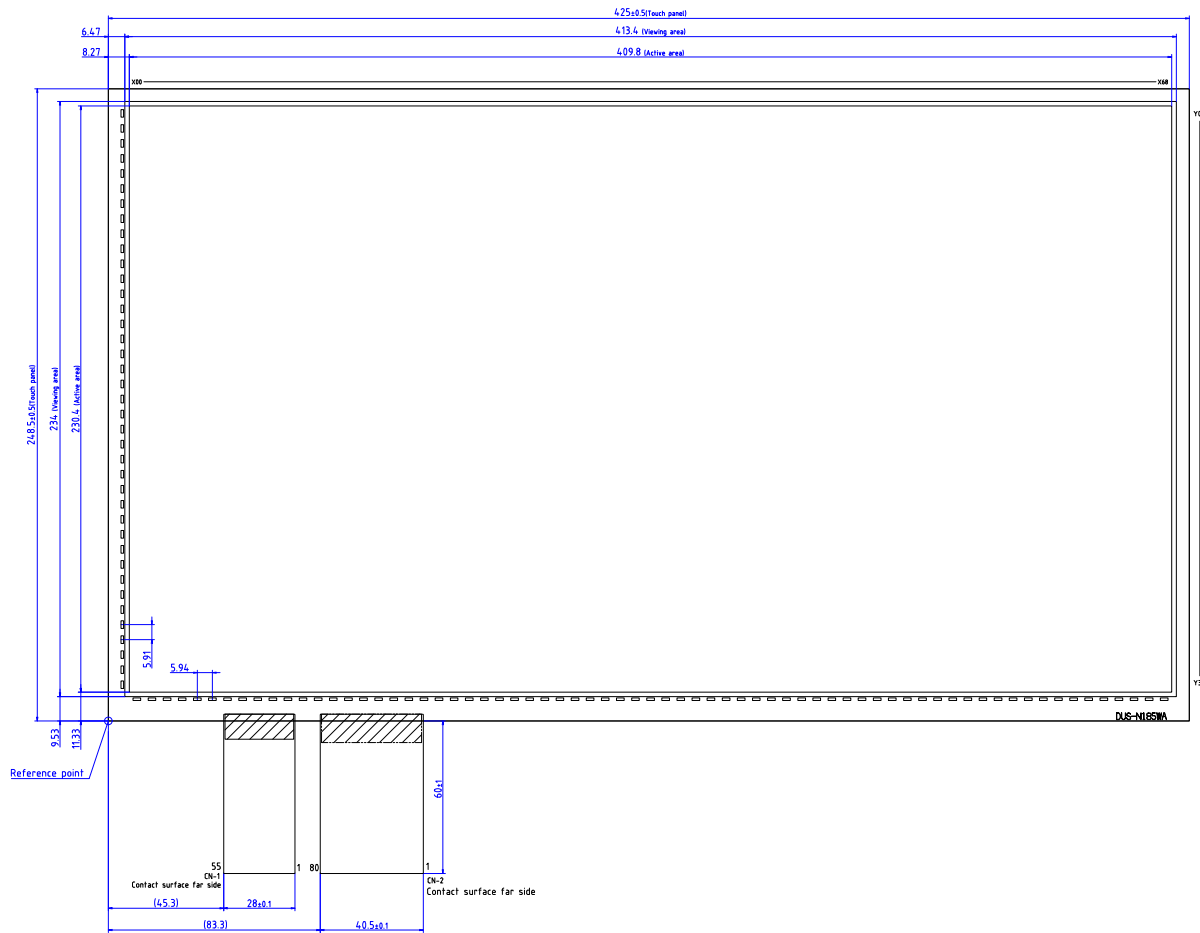

CN1 PinOut
1 — Dummy
2 — Y38
3 — Y31
4 — Y36
5 — Y35
6 — Y34
7 — Y33
8 — Y32
9 — Y31
10 — Y30
11 — Y29
12 — Y28
13 — Y21
14 — Y26
15 — Y25
16 — Y24
17 — Y23
18 — Y22
19 — Y21
20 — Y20
21 — Y19
22 — Y18
23 — Y17
24 — Y16
25 — Y15
26 — Y14
27 — Y13
28 — Y12
29 — Y11
30 — Y10
31 — Y09
32 — Y08
33 — Y07
34 — Y06
35 — Y05
36 — Y04
37 — Y03
38 — Y02
39 — Y01
40 — Y00
41 — Dummy
42 — NC
43 — NC
44 — NC
45 — NC
46 — NC
47 — NC
48 — NC
49 — NC
50 — NC
51 — NC
52 — NC
53 — NC
54 — NC
55 — NC

CN2 PinOut
1 — NC
2 — NC
3 — NC
4 — NC
5 — NC
6 — NC
7 — NC
8 — NC
9 — NC
10 — Dummy
11 — X68
12 — X67
13 — X66
14 — X65
15 — X64
16 — X63
17 — X62
18 — X61
19 — X60
20 — X59
21 — X58
22 — X57
23 — X56
24 — X55
25 — X54
26 — X53
27 — X52
28 — X51
29 — X50
30 — X49
31 — X48
32 — X47
33 — X46
34 — X45
35 — X44
36 — X43
37 — X42
38 — X41
39 — X40
40 — X39
41 — X38
42 — X37
43 — X36
44 — X35
45 — X34
46 — X33
47 — X32
48 — X31
49 — X30
50 — X29
51 — X28
52 — X27
53 — X26
54 — X25
55 — X24
56 — X23
57 — X22
58 — X21
59 — X20
60 — X19
61 — X18
62 — X17
63 — X16
64 — X15
65 — X14
66 — X13
67 — X12
68 — X11
69 — X10
70 — X09
71 — X08
72 — X07
73 — X06
74 — X05
75 — X04
76 — X03
77 — X02
78 — X01
79 — X00
80 — Dummy

REMARKS	
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	Cu 0.2-0.3mm
	mm
CIRCUIT PATTERN WIDTH	Ag 0.03mm
	mm
TOLERANCE±0.3mm	

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	±1.1mm	
2 BOTTOM ITO GLASS	±1.1mm	
3 FPC	POLYIMIDE 12.5μm	Electronics copper foil
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	150μm	
7 PROTECTION TAPE	POLYESTER 25μm	

FPC pattern is detailed

TOLERANCE±0.3mm  
EXCEPT WHERE INDICATED  
UNIT=mm

PART No.	DATE
DUS-N185WA060A	JUL/11/23
TYPE	
Projected Capacitive	
DIMENSIONAL DRAWING	
	DMC Co., Ltd.

