
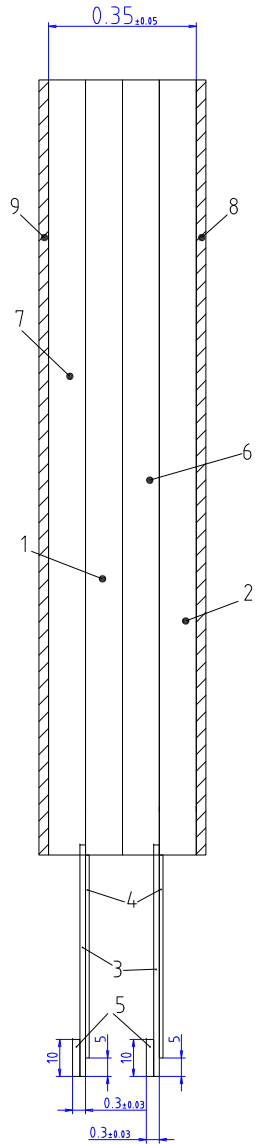
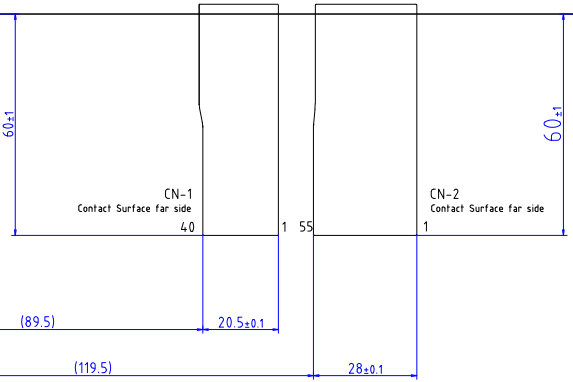


REference Point



CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	NC
2	Y30	2	NC
3	Y29	3	NC
4	Y28	4	NC
5	Y27	5	NC
6	Y26	6	NC
7	Y25	7	NC
8	Y24	8	NC
9	Y23	9	NC
10	Y22	10	NC
11	Y21	11	NC
12	Y20	12	Dummy
13	Y19	13	X4.0
14	Y18	14	X39
15	Y17	15	X38
16	Y16	16	X37
17	Y15	17	X36
18	Y14	18	X35
19	Y13	19	X34
20	Y12	20	X33
21	Y11	21	X32
22	Y10	22	X31
23	Y09	23	X30
24	Y08	24	X29
25	Y07	25	X28
26	Y06	26	X27
27	Y05	27	X26
28	Y04	28	X25
29	Y03	29	X24
30	Y02	30	X23
31	Y01	31	X22
32	Y00	32	X21
33	Dummy	33	X20
34	NC	34	X19
35	NC	35	X18
36	NC	36	X17
37	NC	37	X16
38	NC	38	X15
39	NC	39	X14
40	NC	40	X13
		41	X12
		42	X11
		43	X10
		44	X09
		45	X08
		46	X07
		47	X06
		48	X05
		49	X04
		50	X03
		51	X02
		52	X01
		53	X00
		54	Dummy
		55	NC

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
	-	mm
○ TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1 TOP ITO FILM	t=0.1mm	
2 BOTTOM ITO FILM	t=0.1mm	
3 FPC	POLYIMIDE 12.5μm	Electrolytic copper foil 95.0%
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	OCA 50μm	
7 ADHESIVE SHEET A	OCA 100μm	
8 SEPARATE FILM		
9 SEPARATE FILM		

TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

PART No.	DATE
DUS-XF121A060B	Jan/29/2021
TYPE	DMC Co., Ltd.
Projected Capacitive DIMENSIONAL DRAWING	