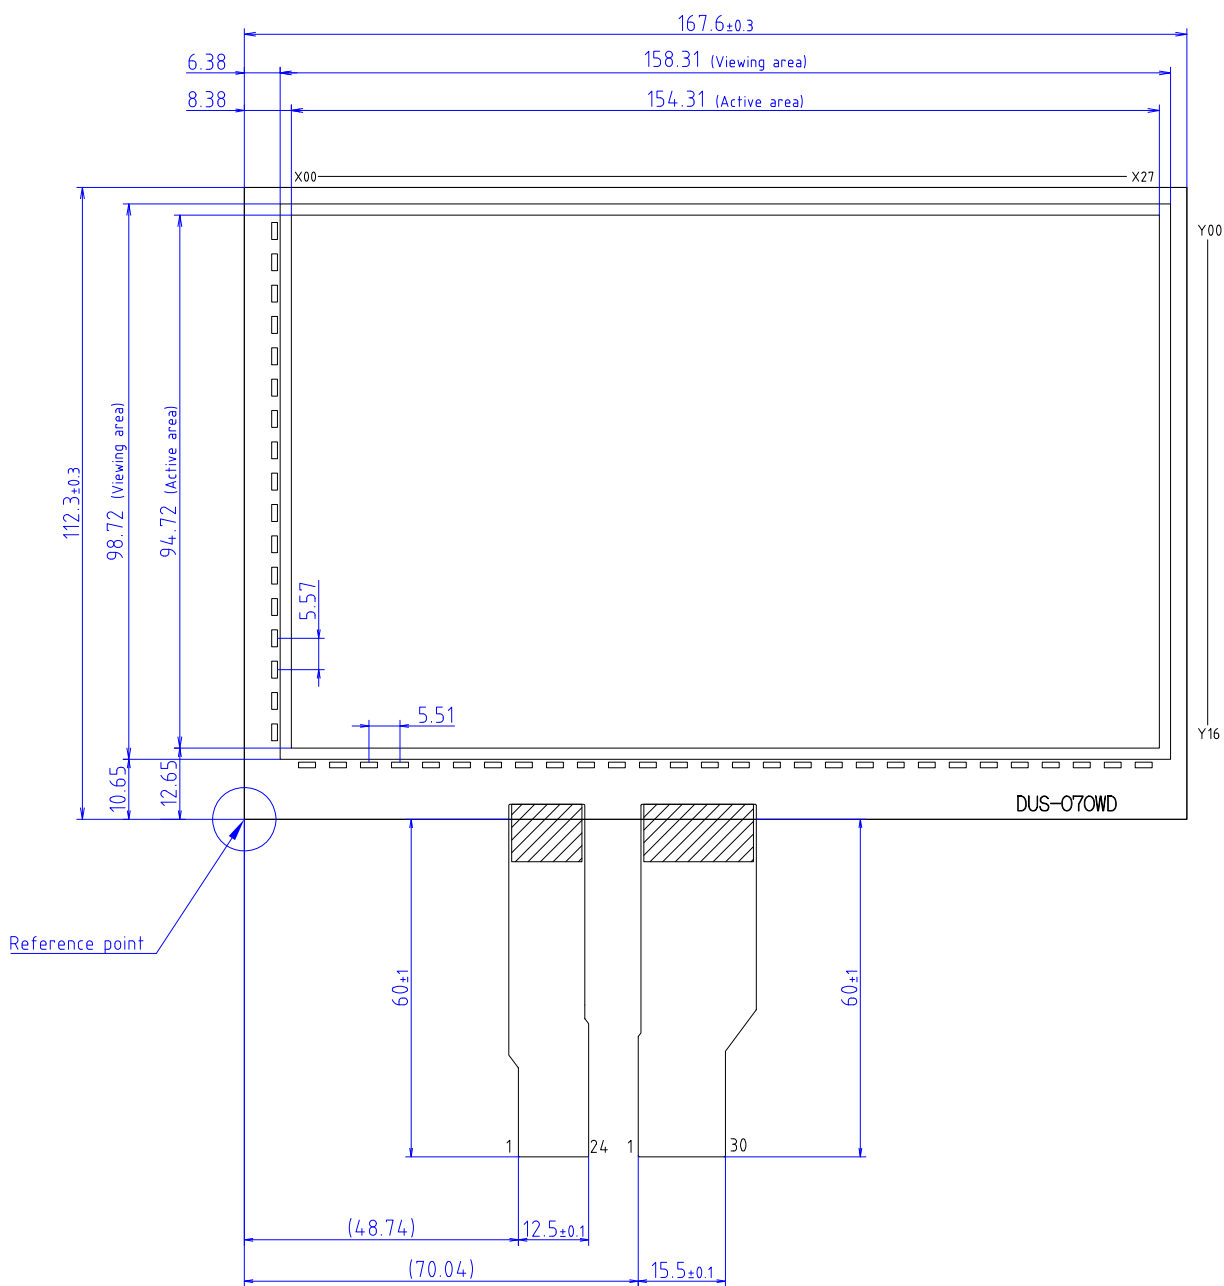


CN1 PinOut		CN2 PinOut	
1	NC	1	Dummy
2	NC	2	X00
3	NC	3	X01
4	NC	4	X02
5	NC	5	X03
6	Dummy	6	X04
7	Y00	7	X05
8	Y01	8	X06
9	Y02	9	X07
10	Y03	10	X08
11	Y04	11	X09
12	Y05	12	X10
13	Y06	13	X11
14	Y07	14	X12
15	Y08	15	X13
16	Y09	16	X14
17	Y10	17	X15
18	Y11	18	X16
19	Y12	19	X17
20	Y13	20	X18
21	Y14	21	X19
22	Y15	22	X20
23	Y16	23	X21
24	Dummy	24	X22
		25	X23
		26	X24
		27	X25
		28	X26
		29	X27
		30	Dummy

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	0.1mm
	-	mm
O TOLERANCE=±0.3mm		

ITEM	MATERIAL		REMARKS
1 TOP ITO GLASS	t=1.1mm		
2 BOTTOM ITO GLASS	t=1.1mm		
3 FPC	POLYIMIDE	12.5μ m	Electrolytic copper foil GLDING
4 REINFORCEMENT FILM	POLYIMIDE	25μ m	
5 STIFFENER	POLYIMIDE	225μ m	
6 ADHESIVE SHEET		150μ m	
7 PROTECTION TAPE	POLYESTER	25μ m	

PART No.	DATE	SCALE
DUS-070WD060C	Aug/1/24	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm

Edges and corners of ITO glass may be chamfered without affecting product specification.

