


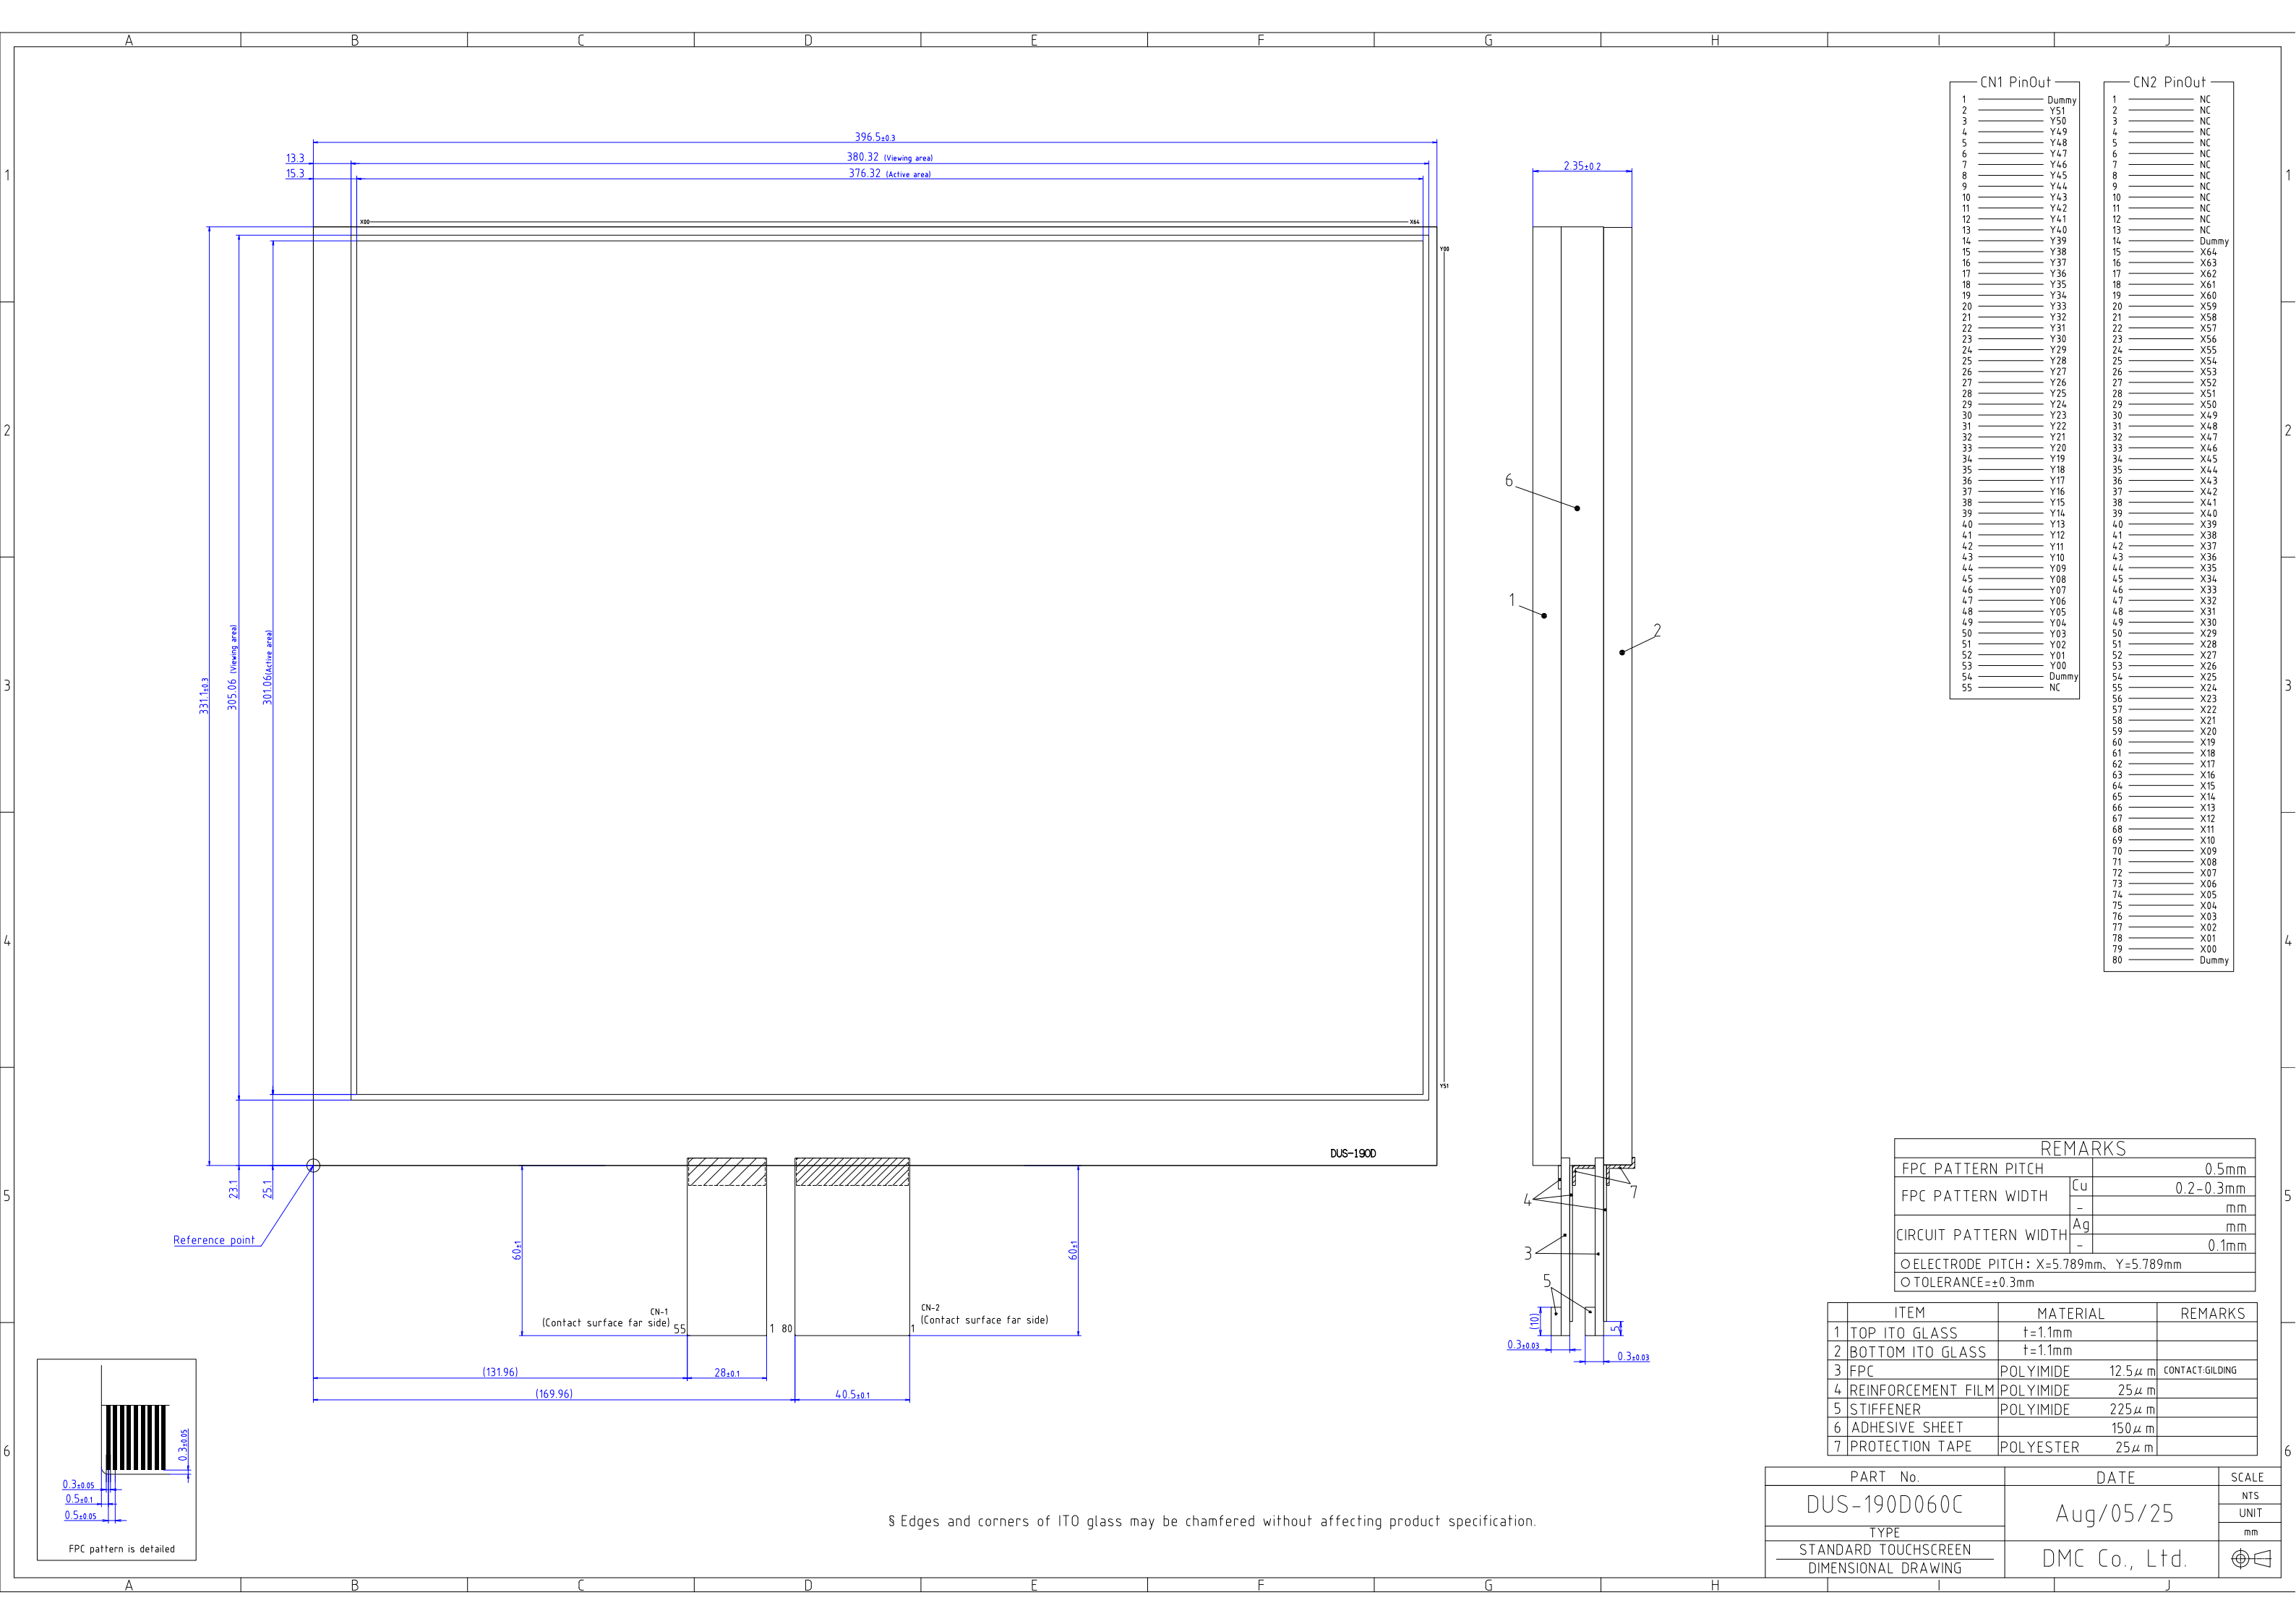

CN1 PinOut	
1	Dummy
2	Y51
3	Y50
4	Y49
5	Y48
6	Y47
7	Y46
8	Y45
9	Y44
10	Y43
11	Y42
12	Y41
13	Y40
14	Y39
15	Y38
16	Y37
17	Y36
18	Y35
19	Y34
20	Y33
21	Y32
22	Y31
23	Y30
24	Y29
25	Y28
26	Y27
27	Y26
28	Y25
29	Y24
30	Y23
31	Y22
32	Y21
33	Y20
34	Y19
35	Y18
36	Y17
37	Y16
38	Y15
39	Y14
40	Y13
41	Y12
42	Y11
43	Y10
44	Y09
45	Y08
46	Y07
47	Y06
48	Y05
49	Y04
50	Y03
51	Y02
52	Y01
53	Y00
54	Dummy
55	NC

CN2 PinOut	
1	NC
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	Dummy
15	X64
16	X63
17	X62
18	X61
19	X60
20	X59
21	X58
22	X57
23	X56
24	X55
25	X54
26	X53
27	X52
28	X51
29	X50
30	X49
31	X48
32	X47
33	X46
34	X45
35	X44
36	X43
37	X42
38	X41
39	X40
40	X39
41	X38
42	X37
43	X36
44	X35
45	X34
46	X33
47	X32
48	X31
49	X30
50	X29
51	X28
52	X27
53	X26
54	X25
55	X24
56	X23
57	X22
58	X21
59	X20
60	X19
61	X18
62	X17
63	X16
64	X15
65	X14
66	X13
67	X12
68	X11
69	X10
70	X09
71	X08
72	X07
73	X06
74	X05
75	X04
76	X03
77	X02
78	X01
79	X00
80	Dummy

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.1mm
OELECTRODE PITCH: X=5.789mm、Y=5.789mm		
O TOLERANCE=±0.3mm		

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=1.1mm	
2 BOTTOM ITO GLASS	t=1.1mm	
3 FPC	POLYIMIDE 12.5μ m	CONTACT-GILDING
4 REINFORCEMENT FILM	POLYIMIDE 25μ m	
5 STIFFENER	POLYIMIDE 225μ m	
6 ADHESIVE SHEET	150μ m	
7 PROTECTION TAPE	POLYESTER 25μ m	

PART No.	DATE	SCALE
DUS-190D060C	Aug/05/25	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN		mm
DIMENSIONAL DRAWING	DMC Co., Ltd.	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.