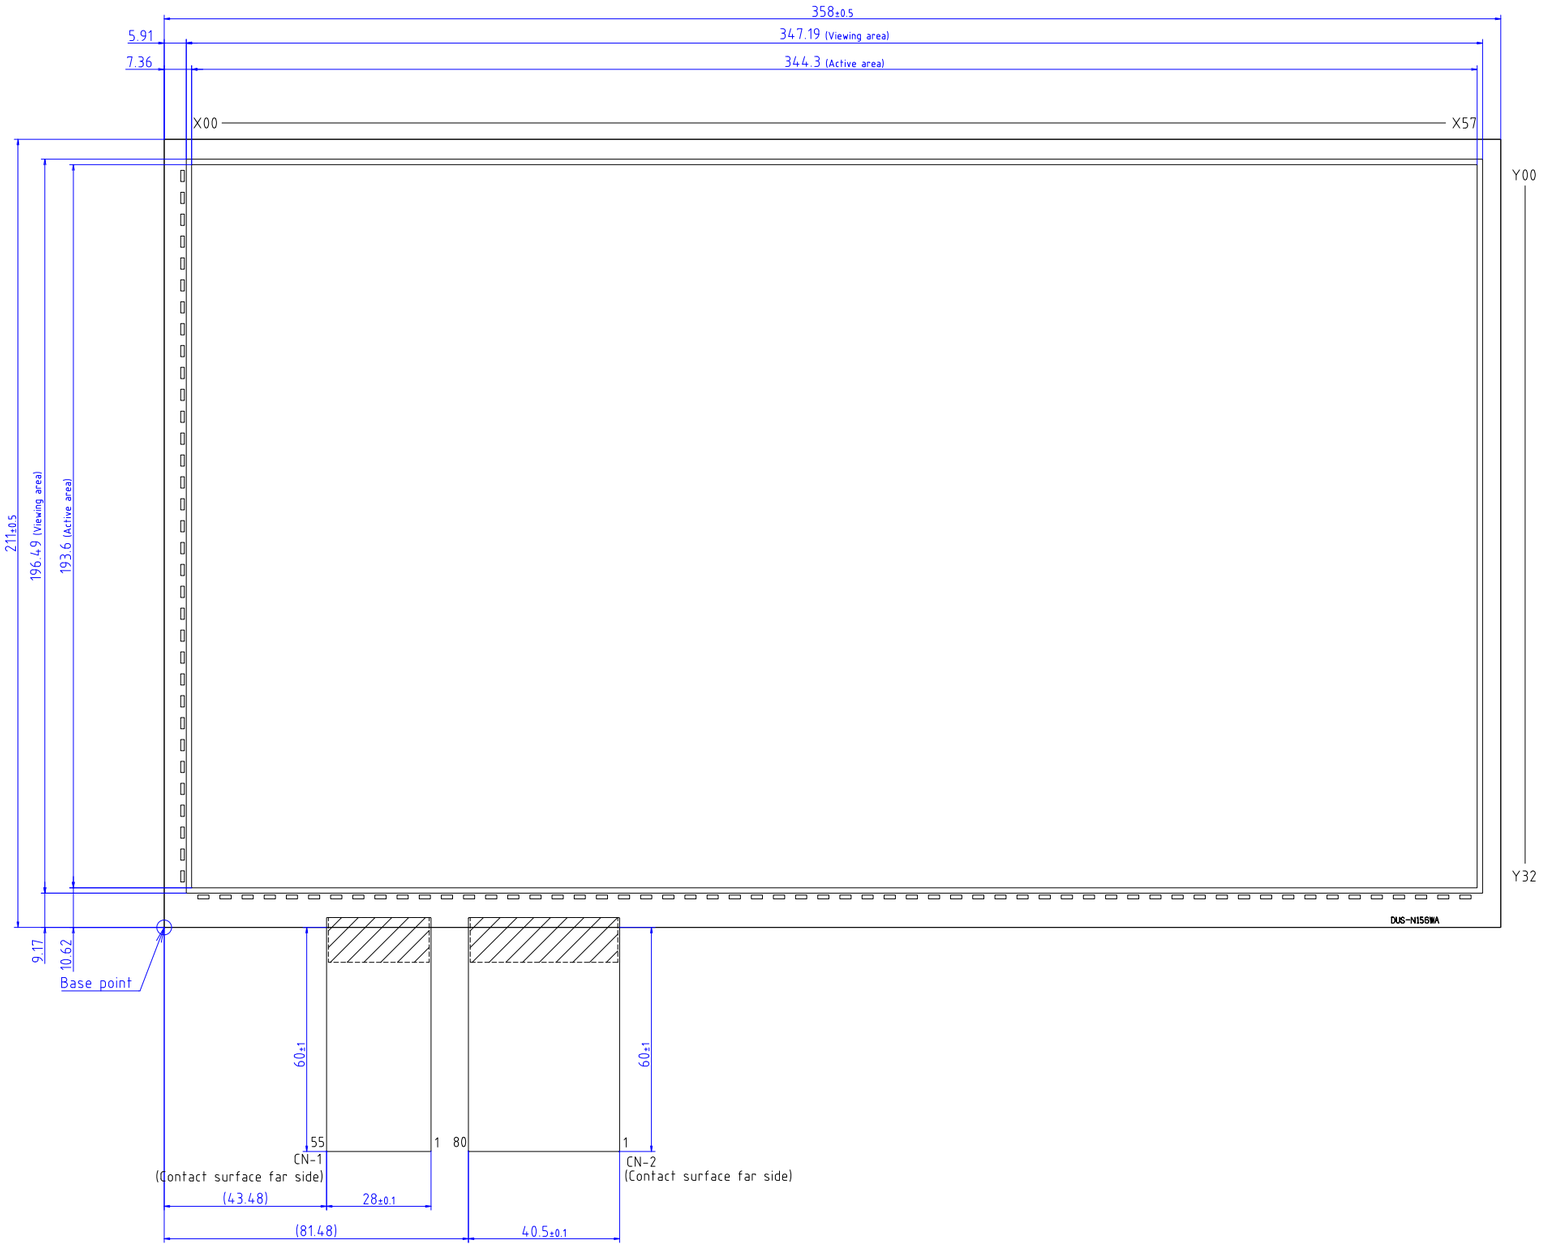

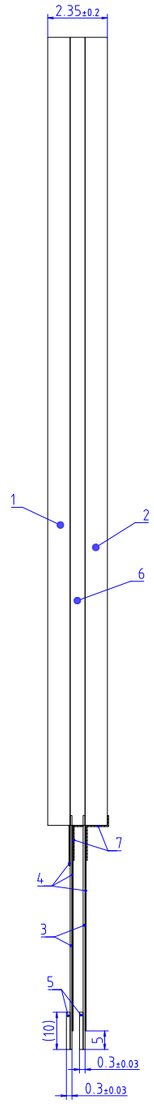



CN-1 PinOut

1	Dummy	2	Y32	3	Y31	4	Y30	5	Y29
6	Y28	7	Y27	8	Y26	9	Y25	10	Y24
11	Y23	12	Y22	13	Y21	14	Y20	15	Y19
16	Y18	17	Y17	18	Y16	19	Y15	20	Y14
21	Y13	22	Y12	23	Y11	24	Y10	25	Y09
26	Y08	27	Y07	28	Y06	29	Y05	30	Y04
31	Y03	32	Y02	33	Y01	34	Y00	35	Dummy
36	NC	37	NC	38	NC	39	NC	40	NC
41	NC	42	NC	43	NC	44	NC	45	NC
46	NC	47	NC	48	NC	49	NC	50	NC
51	NC	52	NC	53	NC	54	NC	55	NC

CN-2 PinOut

1	NC	2	NC	3	NC	4	NC	5	NC
6	NC	7	NC	8	NC	9	NC	10	NC
11	NC	12	NC	13	NC	14	NC	15	NC
16	NC	17	NC	18	NC	19	NC	20	NC
21	Dummy	22	X57	23	X56	24	X55	25	X54
26	X53	27	X52	28	X51	29	X50	30	X49
31	X48	32	X47	33	X46	34	X45	35	X44
36	X43	37	X42	38	X41	39	X40	40	X39
41	X38	42	X37	43	X36	44	X35	45	X34
46	X33	47	X32	48	X31	49	X30	50	X29
51	X28	52	X27	53	X26	54	X25	55	X24
56	X23	57	X22	58	X21	59	X20	60	X19
61	X18	62	X17	63	X16	64	X15	65	X14
66	X13	67	X12	68	X11	69	X10	70	X09
71	X08	72	X07	73	X06	74	X05	75	X04
76	X03	77	X02	78	X01	79	X00	80	Dummy

REMARKS		
FPC PATTERN PITCH		0.5mm
FPC PATTERN WIDTH	Cu	0.2-0.3mm
	-	mm
CIRCUIT PATTERN WIDTH	Ag	mm
	-	0.03mm
○ELECTRODE PITCH: X=5.93mm, Y=5.86mm		
○TOLERANCE=±0.3mm		

	ITEM	MATERIAL		REMARKS
1	TOP ITO GLASS	t=1.1mm		
2	BOTTOM ITO GLASS	t=1.1mm		
3	FPC	POLYIMIDE	12.5μm	CONTACT-GILDING
4	REINFORCEMENT FILM	POLYIMIDE	25μm	
5	STIFFENER	POLYIMIDE	225μm	
6	ADHESIVE SHEET		150μm	
7	PROTECTION TAPE	POLYESTER	25μm	

§ Edges and corners of ITO glass may be chamfered without affecting product specification.

PART No.	DATE	SCALE
DUS-N156WA060C	Jun/10/26	NTS
TYPE		UNIT
STANDARD TOUCHSCREEN DIMENSIONAL DRAWING	DMC Co., Ltd.	mm